

Product catalogue 2019
Heating



All-in-one comfort for residential applications

Our promise...

... is to ensure that customers can depend on Daikin for the ultimate in comfort, so that they are free to focus on their own working and home lives.

We promise to dedicate ourselves to technological excellence, a design focus and the highest quality standards so that our customers can trust and rely on the comfort we deliver.

Our promise to the planet is absolute. Our products are at the forefront of low energy-usage and we will innovate to further reduce the environmental impact of our heating solutions.

From residential to collective heating solutions, from renovation to new build, we commit ourselves to answer all our customers' needs. Our heat pump DNA combined with our in-house combustion development positions Daikin as a leader, for now and the decades to come.

The image shows the Daikin logo on the side of a building. The logo consists of a stylized blue triangle on the left, followed by the word "DAIKIN" in large, bold, blue capital letters. The building's facade is white with horizontal lines, and the background is a bright blue sky with scattered white clouds.

DAIKIN

Table of content

| | | | |
|---|------------|--|------------|
| Daikin World | 2 | Boilers | 121 |
| Introduction | 4 | Condensing boilers..... | 122 |
| Award winning units..... | 4 | Gas condensing boilers..... | 124 |
| Top notch technologies..... | 5 | Daikin Altherma 3 C Gas W..... | 124 |
| Heat Pump Keymark..... | 5 | Daikin Altherma C Gas W..... | 130 |
| Solutions overview..... | 6 | Daikin Altherma C Gas ECH ₂ O..... | 132 |
| Stand By Me | 8 | Daikin Altherma C Oil..... | 136 |
| Heat pumps | 13 | Flue gas evacuation system..... | 142 |
| Daikin Altherma 3 R | 14 | Tanks | 149 |
| Daikin Altherma 3 R F..... | 16 | Thermal stores..... | 152 |
| Daikin Altherma 3 R ECH ₂ O..... | 22 | Stainless steel tanks..... | 154 |
| Daikin Altherma 3 R W..... | 30 | Oil boiler DHW tank NEW | 155 |
| Daikin Altherma 3 H NEW | 36 | Controls | 157 |
| Daikin Altherma 3 H F..... | 38 | Room controllers..... | 158 |
| Daikin Altherma 3 H W..... | 44 | Online controllers..... | 162 |
| Daikin Altherma R | 50 | Multi-zone controllers..... | 163 |
| Daikin Altherma R F..... | 50 | Heat pump convector | 165 |
| Daikin Altherma R ECH ₂ O..... | 64 | Daikin Altherma HPC..... | 166 |
| Daikin Altherma R W..... | 70 | Solar heating systems | 171 |
| Daikin Altherma M | 80 | Solar panels for pressurised use and Drain-back system..... | 178 |
| Daikin Altherma R HT | 86 | Solar panel - pressurised system..... | 180 |
| Daikin Altherma M HW | 90 | Solar panels - drain-back system..... | 182 |
| Daikin Altherma R HW | 92 | Solar collector..... | 185 |
| Daikin Altherma R Flex Type HT HW | 94 | Pump station..... | 185 |
| Daikin Altherma R Flex Type | 96 | | |
| Daikin Altherma Ground source heat pump NEW | 98 | | |
| Daikin Altherma 3 GEO..... | 98 | | |
| Daikin Altherma GEO..... | 105 | | |
| Daikin Altherma Hybrid heat pump | 106 | | |
| Daikin Altherma R Hybrid..... | 106 | | |
| Daikin Altherma R Hybrid + multi..... | 110 | | |
| Daikin Altherma H Hybrid..... | 114 | | |

Award winning units

thanks to a unique design

Heating products recently gathered all the most famous design awards: iF design and RedDot awards thanks to a brand-new design. Our wall mounted gas condensing boiler as well as our third generation heat pump (both floor standing and wall mounted models) received these design awards, putting the spotlight on our unique design.

Heating products are taking more and more importance within Daikin solutions portfolio. More products mean more solutions to cover all the needs. The design of the units is a major asset for customers that's why we decided to bring a brand-new design to our heating products.

The new design has to be discrete and modern, but also intuitive and user-friendly. The Daikin Eye has been developed to help both customers and installers getting the best experience possible while using the unit interface. The high-resolution colour controller is easy to use, and the Daikin Eye informs instantaneously if everything is working correctly.

All those features were rewarded with the most famous design awards: iF and RedDot design awards, for our high-end technology products.



reddot award 2018
winner



Daikin Altherma 3 heat pumps



Daikin Altherma 3 gas boiler

Top-notch technologies and efficiency

Daikin commits to develop the most effective technologies to reach the best energy efficiency levels and respect the planet. Our Bluevolution technology uses the R-32 refrigerant, which largely lowers CO₂ emissions compared to its competitors. Daikin leads again the way for better heating solutions and a better environment.

Customers are looking for the best solutions for their home, with an eye on the energy efficiency labels. Daikin always proposes the most environment friendly units with the maximum energy labels for the heat pumps: A+++ (energy label 2019).

The third generation Daikin Altherma heat pumps reach this efficiency thanks to the Bluevolution technology. It combines an in-house developed compressor and the R-32 refrigerant which makes it unique on the market.

Less CO₂ emissions & more efficiency, the recipes for top-notch technologies.



Heat Pump Keymark

A unique certificate for the European market




The Heat Pump KEYMARK is a voluntary, independent, European certification mark for all heat pumps. It certifies space heating performance, sound power level, domestic hot water performance as well as operating tests.

The Heat Pump KEYMARK is based on independent, third-party testing and demonstrates compliance with product requirements as set in the Heat Pump KEYMARK scheme rules and with efficiency requirements as set by Ecodesign Lot 1, Lot 2.

As a group, we are strongly convinced of the quality of this scheme, both for our customers and ourselves as manufacturers. It is therefore our intention to certify the entire portfolio of Daikin Altherma heat pumps.

Find all our certified products on
<http://www.heatpumpkeymark.com>

Solutions overview

| | | Heat pumps | | | | |
|----------------------------|---|---|--|---|--|--|
| | | Air-to-water technology | | | | |
| | | Space heating and domestic hot water | | | | |
| | | R-32 Daikin Altherma low temperature split | R-410A Daikin Altherma low temperature split | Daikin Altherma low temperature monobloc | Daikin Altherma high temperature split | Monobloc domestic hot water heat pump |
| Products | | NEW  |  |  |  |  |
| Page | | 14 | 50 | 80 | 86 | 90 |
| Set-up type | |  |  |  |  |  |
| Space heating (up to) | | A+++ (1) | A++ | A++ | A+ | - |
| Domestic hot water (up to) | | A+ (1) | A | - | B | A+ |
| Renovation | | - | ● | ● | ● | ● |
| New build | | ● | ● | ● | - | ● |
| Tanks | Thermal stores EKHWC/D/P*  | A | A | A | B | - |
| | EKHTS-AC  | - | - | - | B | - |
| | EKHWS(U)-B  | - | B | A | - | - |
| | EKHWS(U)-D  | A | - | A | - | - |
| | DFLOSTO-A  | - | - | - | - | - |
| Thermal Solar panels | | ● | ● | ● | - | ● |

(1) According to EU n°811/2013 - label lay-out 2019

| | | | | Hybrid | | Combustion | |
|------------------------------|---------------------------|----------------------------------|---|--------------------------------------|--------------|----------------|----------------|
| | | Ground to water | | Hybrid | | Gas | Oil |
| Domestic hot water | | Space heating | | Space heating and domestic hot water | | | |
| Domestic hot water heat pump | Daikin Altherma Flex Type | Daikin Altherma LT High capacity | Daikin Altherma ground source heat pump | Daikin Altherma hybrid heat pump | Wall mounted | Floor standing | Floor standing |
| | | | NEW | | | | |
| 92 | 94 | 96 | 98 | 106 | 121 | 136 | |
| | | | | | | | |
| - | - | A⁺ | A⁺⁺⁺ (1) | A⁺⁺ | A | A | A |
| A | A | - | A | A | A | A | • |
| • | - | - | • | • | • | • | • |
| • | • | • | • | • | • | • | • |
| - | - | - | - | • | A | A | A |
| - | A | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | - |
| - | - | - | - | - | - | - | • |
| • | • | - | - | • | • | • | • |

Stand By Me,

A journey to customer satisfaction

It's time to relax. With your customer's new Daikin installation and Stand By Me service programme, you can rest assured they are benefiting from the best comfort, energy efficiency, usability and service available on the market. Stand By Me eliminates your clients' worries and provides them with a free, extended warranty, quick follow-up from Daikin service providers, and additional warranties for specific parts.




Free warranty extension



The first advantage of **Stand By Me** is a free warranty extension:

- applies to both labour and parts
- begins immediately after registration



Quick follow-up by Daikin service partners

Daikin service partners are automatically notified when a customer registers their installation on www.standbyme.daikin.eu and needs maintenance.

Your customer is guaranteed:

- quick and reliable service
- management of all information related to their installation such as, registration documents, attendance records, maintenance records, etc.
- realtime error codes are informing the service partner about possible issues




Extended warranty on parts

For a small fee, customers can extend the warranty on specific parts. Contact your local Daikin branche to have more information about the specific offer in your country. **Stand By Me** guarantees:

- that each component is replaced quickly
- helps avoid financial surprises
- long life and smooth operation and all other benefits of a Daikin installation
- reliable service from official Daikin service partners

Daikin service partners work exclusively with Daikin parts and have all of the necessary technical knowledge to solve any issue that may arise

Stand By Me roadmap overview

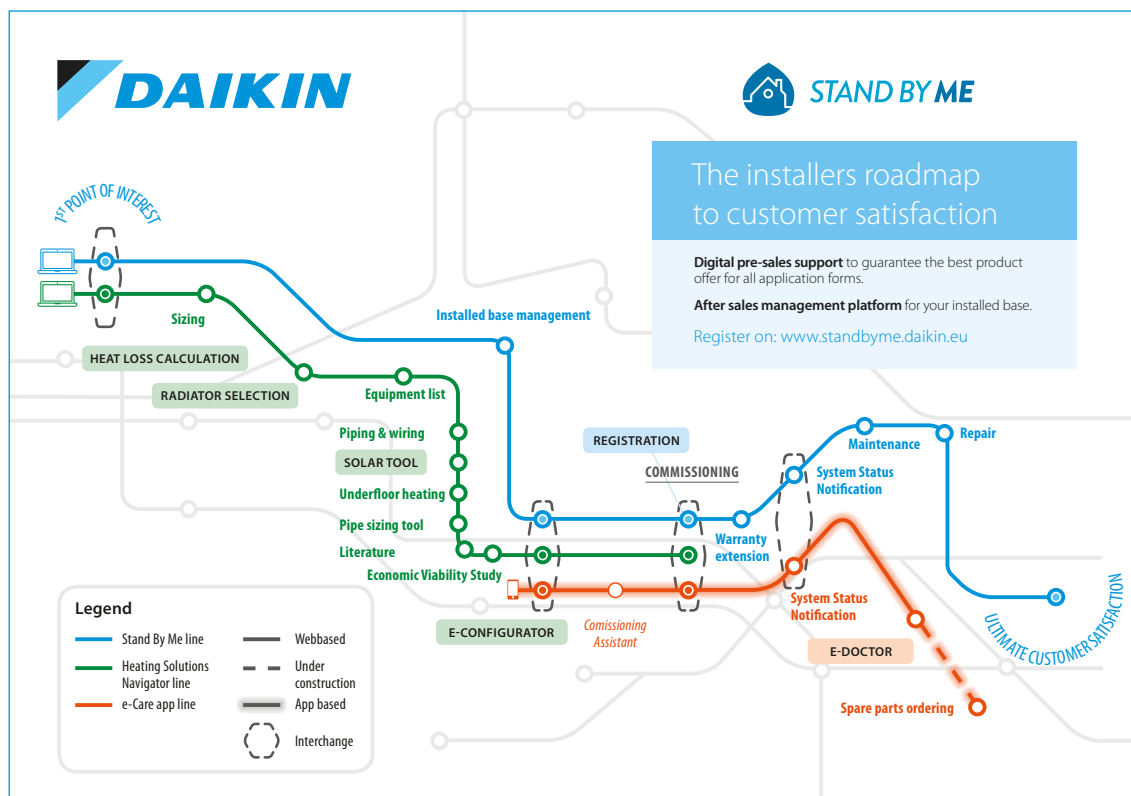


Heating Solutions Navigator



Want to know more about our Heating Solutions Navigator?

- › The Heating Solutions Navigator is a digital toolbox developed for Daikin professionals with the aim to assist in providing the best fit solution for your customers home.
- › With this tool you can configure your installation, create custom made piping & wiring diagrams, set the configuration on your installation and much more.

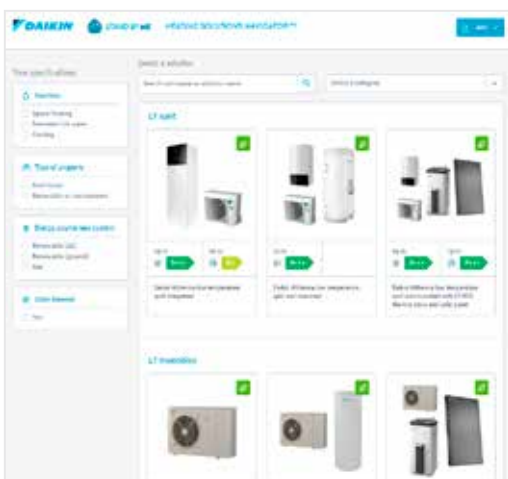

E-Care app



The Daikin e-Care app wants to make the life of a Daikin installer easier by offering Stand By Me registrations via QR code scanning, easy configuration of your heating installation and troubleshooting via the e-Doctor part.





Stand By Me and the Heating Solutions Navigator are built to connect between yourself and Daikin to make your life easier.

Interested in how the platform operates? Please scan the QR-codes to see a demo for each tool.



HEATING SOLUTIONS NAVIGATOR (HSN)
professional.standbyme.daikin.eu

The Heating Solutions Navigator is a digital toolbox developed for Daikin professionals with the aim to assist in providing the best fit solution for your customers homes. With this tool you can configure your installation, create custom made piping & wiring diagrams, set the configuration on your installation and much more.



SIZING

HSN Heat loss calculation tool/ Room by Room
The optional 'Room by Room' heat load calculation tool, is a tool which enable you to calculate the heat load in a property. Next to the Room by Room, a simplified heat load calculation is available.

SOLAR

HSN Solar Selection Tool
The Solar Selection Tool shows the benefits of a DAIKIN solar system and supports professionals in selecting the right solar system for a house.

PIPE SIZING TOOL

Calculate the maximum hydronic piping length from the indoor unit to the outdoor unit based on the emitter pressure drop or the other way around.

ECONOMIC VIABILITY STUDY

Compare your Daikin solution with a benchmark solution.

INSTALLED BASE MANAGEMENT



EQUIPMENT LIST

RADIATOR

HSN Radiator Selection Tool
This Radiator selector tool supports customers in selecting the appropriate radiator size for each room.

UNDERFLOOR HEATING

The underfloor Heating Tool gives the customer an indication of material that is needed for a specific project. A detailed calculation and floorplan can also be asked via this toolbox.

PIPING & WIRING

Customized piping and wiring diagrams are generated for each and every project, taking into account many parameters such as heat generator, zoning, emitter type and options.

CONFIGURATION TOOL

The e-Configurator is a web based tool and app which allows installers to configure the settings of Daikin Altherma heat pumps remotely. Thanks to its user friendly and intuitive interface, configuration can be completed in a couple of steps. Then it can be stored as a pdf or saved in the USB stick/ SD card to upload it in the heat pump on site.



LITERATURE



**CONTACT YOUR LOCAL
SBM/HSN SPECIALIST**

REGISTRATION

Installation Registration SBM is an after-sales service tool where end-users can extend the warranty on their installation or order maintenance packages. All Daikin professionals have an essential role in these service offerings.

With Stand By Me, you, as Daikin professional, can keep a complete digital logbook of your installed base of Daikin products and consult it via any mobile device.

COMMISSIONING

COMMISSIONING ASSISTANT

Use this special hydro check module during commissioning.



DEMO

WARRANTY EXTENSION

SYSTEM STATUS NOTIFICATION

SYSTEM STATUS NOTIFICATION

Receive malfunction codes of your installations directly on your Stand By Me platform or via a notification in the e-Care app.

MAINTENANCE



DEMO

REPAIR

E-DOCTOR

Part of e-Care
Daikin e-Doctor is part of e-Care, an application to guide our Daikin colleagues and installers in troubleshooting a unit.

SPARE PARTS ORDERING

ULTIMATE CUSTOMER SATISFACTION

E-CARE



DAIKIN

Stand By Me, a journey towards customer satisfaction



Table of content

heat pumps

| | |
|---|------------|
| Daikin Altherma 3 R | 14 |
| Daikin Altherma 3 R F | 16 |
| Daikin Altherma 3 R ECH ₂ O | 22 |
| Daikin Altherma 3 R W | 30 |
| Daikin Altherma 3 H NEW | 36 |
| Daikin Altherma 3 H F | 38 |
| Daikin Altherma 3 H W | 44 |
| Daikin Altherma R | 50 |
| Daikin Altherma R F | 50 |
| Daikin Altherma R ECH ₂ O | 64 |
| Daikin Altherma R W | 70 |
| Daikin Altherma M | 80 |
| Daikin Altherma R HT | 86 |
| Daikin Altherma M HW | 90 |
| Daikin Altherma R HW | 92 |
| Daikin Altherma R Flex Type HT HW | 94 |
| Daikin Altherma R Flex Type | 96 |
| Daikin Altherma Ground source heat pump NEW | 98 |
| Daikin Altherma 3 GEO | 98 |
| Daikin Altherma GEO | 105 |
| Daikin Altherma Hybrid heat pump | 106 |
| Daikin Altherma R Hybrid | 106 |
| Daikin Altherma R Hybrid + multi | 110 |
| Daikin Altherma H Hybrid | 114 |

Daikin Altherma 3 R

powered by Bluevolution
with R-32 refrigerant



Why choose Daikin Altherma 3 R?

Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.



High performance

- › Delivering temperatures up to 65°C at high efficiency, the R-32 Daikin Altherma 3 is suitable for both underfloor heating and radiators and retains its pedigree trademark in frost protection down to -25°C, ensuring reliable operation even in the coldest climates.
- › The optimal combination of Bluevolution technology offers the highest performance:
 - » seasonal efficiency up to A+++ (energy label 2019)
 - » heating efficiency up to a COP of 5,1 (at 7°C/35°C)
 - » Domestic hot water efficiency up to COP of 3,3 (EN16147)
- › Available in 4, 6 and 8 kW

Easy to install

- › Delivered ready to work: all key hydraulic elements are already factory mounted
- › The new design enables that all servicing can be done from the front and all piping can be accessed at the top of the unit
- › Stylish modern outlook
- › The outdoor unit is tested and charged with refrigerant, installation time is reduced

Easy commissioning :

- › Integrated high resolution colour interface
- › Quick wizard allowing commissioning in maximum 9 easy steps to have the full system ready to work
- › Next to that the configuration can take place remotely to upload later on the unit after the day of the installation.

Easy to control

- › The combined effect of the Daikin Altherma weather dependent set-point controls and its inverter compressors maximises the efficiency of the new R-32 Daikin Altherma 3 at each outdoor temperature, assuring consistent room temperatures at all times.
- › To control on a daily basis your home temperature, settings can be done anywhere at any time via the Daikin Online Controller app. This online controller allows adjustment of home comfort levels to suit individual preferences while achieving further energy efficiencies. The R-32 Daikin Altherma 3 range can also be fully integrated with other home control systems




Control
via app

Daikin Altherma 3 R offers a wide range to adapt to your customers needs

- **Best seasonal efficiencies** providing the highest savings on running costs
- Perfect fit for **new builds**, as well as for low energy houses
- A leaving water temperature up to 65°C makes it also **a perfect choice for refurbishments**

To cover all applications, the Daikin Altherma 3 R is available in 3 different indoor units



Daikin Altherma 3 R F

Floor standing unit with integrated domestic hot water tank

Compact and yet 100 % comfort guaranteed

- › All components and connections are factory mounted
- › Very small 595 x 625 mm installation footprint required
- › Minimum electrical input with constantly available hot water
- › Dedicated Bi-Zone models available: two temperature zones automatically regulated by the same indoor unit
- › Modern stylish design available in white or silver-grey



Daikin Altherma 3 R ECH₂O

Floor standing unit with integrated ECH₂O tank

Integrated solar unit and domestic hot water tank

- Maximising renewable energy with top comfort for hot water preparation
- › Solar support for domestic hot water
 - › Lightweight plastic tank
 - › Bivalent option: can be combined with a secondary heat source
 - › App control available



Daikin Altherma 3 R W

Wall mounted unit

High flexibility for installation and domestic hot water connection

- › Compact unit with small installation (almost no side clearance is required)
- › Can be combined with a space separate domestic hot water tank up to 500 litres, with or without solar support
- › Stylish modern design




Daikin Altherma 3 R F floor standing unit with integrated domestic hot water tank

Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

All in one system to save installation space and time

- › A combined stainless steel domestic hot water tank of 180 or 230 L and heatpump ensures a faster installation compared to traditional systems.
- › Inclusion of all hydraulic components means no third party components are required.
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 3, 6, 9 kW as well as back-up heater less models are available
- › Dedicated Bi-Zone models allowing temperature monitoring for 2 zones connect underfloor heating to radiators for optimise efficiency

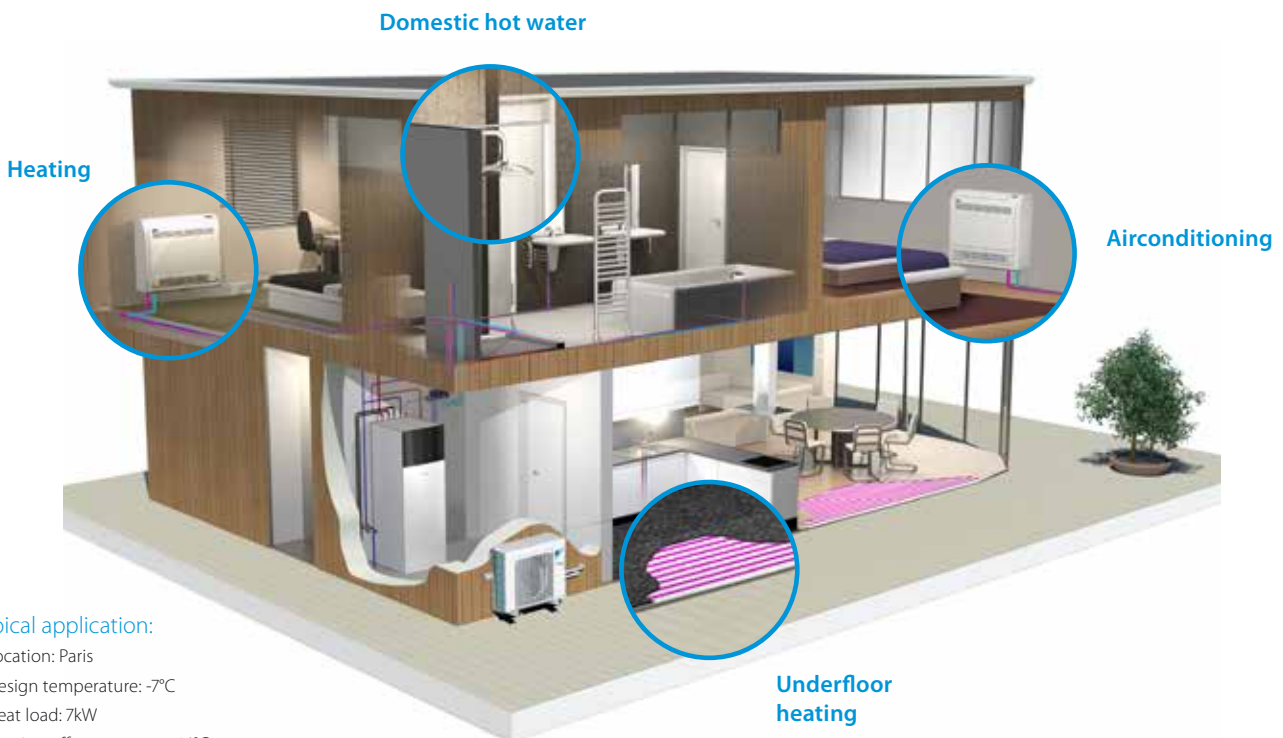

- Typical application:
- › Location: Paris
 - › Design temperature: -7°C
 - › Heat load: 7kW
 - › Heating off temperature: 16°C

All-in one design

Reduces the installation footprint and height


Compared to the traditional split version for a wall mounted indoor unit and a separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

With a small footprint of 595 x 600 mm, the integrated indoor unit has a similar footprint when compared to other household appliances.

For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit.

With an installation height of 1,65 m for an 180 L tank and 1,85 m for a 230 L tank, the required installation height is less than 2m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easy blending in with other household appliances.

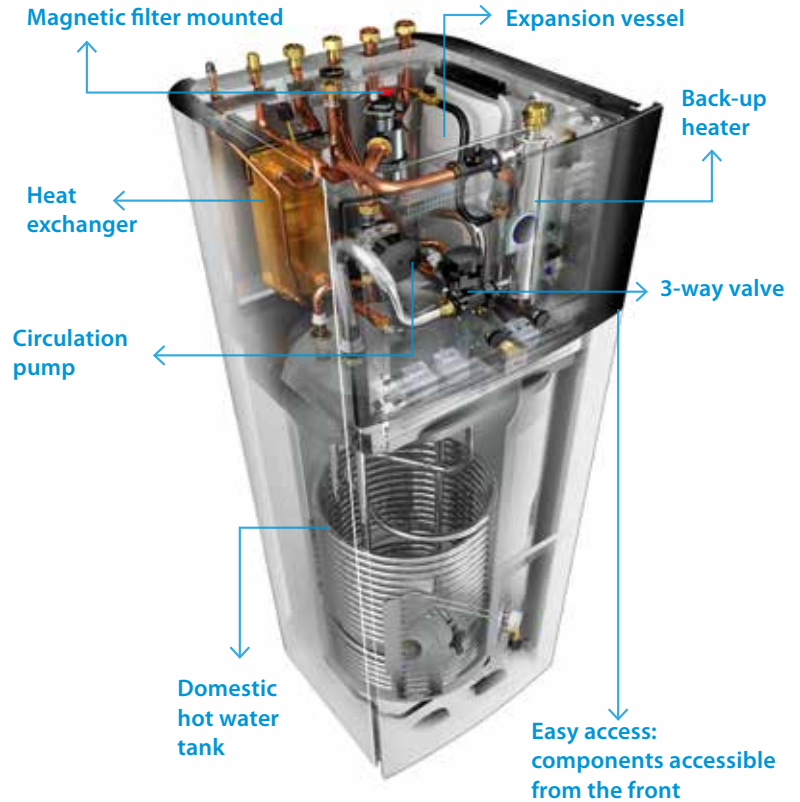

Advanced user interface



The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.

Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit via the new MMI in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation

Work super-fast with the new MMI. It's super easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The MMI was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.


Integrated indoor unit




Daikin Altherma 3 low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251




| Efficiency data | | | | EHVH + ERGA | | 04S18D6V(G)+ 04DV | 04S23D6V(G)+ 04DV | 08S18D6V(G)/D9W(G) + 06DV | 08S23D6V(G)/D9W(G) + 06DV | 08S18D6V(G)/D9W(G) + 08DV | 08S23D6V(G)/D9W(G) + 08DV | |
|-----------------------------------|---------------------------------------|--|---|---------------------|---------------|----------------------|----------------------|------------------------------|------------------------------|------------------------------|------------------------------|------|
| Heating capacity | Nom. | | kW | | | 4.30 (1) / 4.60 (2) | | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | | |
| Power input | Heating | Nom. | kW | | | 0.850 (1) / 1.26 (2) | | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | | |
| COP | | | | | | 5.10 (1) / 3.65 (2) | | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | | | | 3.26 | | | 3.32 | |
| | | | η _{sp} (Seasonal space heating efficiency) | | | | | 127 | | | 130 | |
| | Average climate water outlet 35°C | General | SCOP | | | | | 4.48 | 4.47 | | | 4.56 |
| | | | η _{sp} (Seasonal space heating efficiency) | | | | | 176 | | | 179 | |
| Seasonal space heating eff. class | | | | | | | A++ | | | | | |
| Domestic hot water heating | General climate | Declared load profile | | L | XL | L | XL | L | XL | L | XL | |
| | | Average η _{wh} (water heating efficiency) | | | 125 | 133 | 125 | 133 | 125 | 133 | | |
| | Water heating energy efficiency class | | | | | | | | | | A+ (3) | |
| | | | | | | | | | | | A+++ (3) | |
| Indoor Unit | | | | EHVH | 04S18D6V(G) | 04S23D6V(G) | 08S18D6V(G)/D9W(G) | 08S23D6V(G)/D9W(G) | 08S18D6V(G)/D9W(G) | 08S23D6V(G)/D9W(G) | | |
| Casing | Colour | | | White + Black | | | | | | | | |
| | Material | | | Resin / Sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,850x595x625 | | |
| Weight | Unit | | | kg | 131 | 139 | 131 | 139 | 131 | 139 | | |
| Tank | Water volume | | l | 180 | 230 | 180 | 230 | 180 | 230 | | | |
| | Maximum water temperature | | °C | 70 | | | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | | | |
| | Corrosion protection | | Pickling | | | | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | 5~30 | | | | | | | |
| | | Water side | Min.~Max. | °C | 15~65 | | | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | 5~35 | | | | | | | |
| | | Water side | Max. | °C | 70 | | | | | | | |
| Sound power level | Nom. | | | dBA | 42 | | | | | | | |
| Sound pressure level | Nom. | | | dBA | 28 | | | | | | | |
| Outdoor Unit | | | | ERGA | 04DV | 06DV | | 08DV | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | | | | | | | |
| Weight | Unit | | | kg | 58.5 | | | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | | |
| | Type | | Hermetically sealed swing compressor | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10~43 | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25~35 | | | | | | | | |
| Refrigerant | Type | | R-32 | | | | | | | | | |
| | GWP | | 675.0 | | | | | | | | | |
| | Charge | | kg | 1.50 | | | | | | | | |
| | Charge | | TCO ₂ Eq | 1.01 | | | | | | | | |
| | Control | | Expansion valve | | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | 60 | | 62 | | 62 | | | |
| | Cooling | Nom. | dBA | 61 | | | | | | | | |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | | 49 | | 49 | | | |
| | Cooling | Nom. | dBA | 48 | 49 | | 50 | | 50 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1N~/50/230 | | | | | | | | |
| Current | Recommended fuses | | A | 25 | | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 3, 6, 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218 → 222
011-1W0245, 247
011-1W0249 → 251



| Efficiency data | | | | EHVX + ERGA | 04S18D3V(G)/ D6V(G) + 04DV | 04S23D3V(G)/ D6V(G) + 04DV | 08S18D6V(G)/ D9W(G) + 06DV | 08S23D6V(G)/ D9W(G) + 08DV | 08S18D6V(G)/ D9W(G) + 08DV | 08S23D6V(G)/ D9W(G) + 08DV | | |
|----------------------------|-----------------------------------|-----------------------|--|-----------------------------------|---------------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--|--|
| Heating capacity | Nom. | | | | 4.30 (1) / 4.60 (2) | | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | | | |
| Power input | Heating | Nom. | | | 0,850 (1) / 1.26 (2) | | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | | | |
| Cooling capacity | Nom. | | | | 5.56 (1) / 4.37 (2) | | 5.96 (1) / 4.87 (2) | | 6.25 (1) / 5.35 (2) | | | |
| Power input | Cooling | Nom. | | | 0,940 (1) / 1.14 (2) | | 1.06 (1) / 1.33 (2) | | 1.16 (1) / 1.51 (2) | | | |
| COP | | | | | 5.10 (1) / 3.65 (2) | | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | | | |
| EER | | | | | 5.94 (1) / 3.84 (2) | | 5.61 (1) / 3.67 (2) | | 5.40 (1) / 3.54 (2) | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.26 | | | | 3.32 | | | |
| | | | ηs (Seasonal space heating efficiency) | % | 127 | | | | 130 | | | |
| | Average climate water outlet 35°C | General | SCOP | | 4.48 | | 4.47 | | 4.56 | | | |
| | | | ηs (Seasonal space heating efficiency) | % | 176 | | | | 179 | | | |
| | | | | Seasonal space heating eff. class | | | | A++ | | | | |
| Domestic hot water heating | General climate | Declared load profile | | | L | XL | L | XL | L | XL | | |
| | | Average | ηwh (water heating efficiency) | % | 127 | 134 | 125 | 133 | 125 | 133 | | |
| | | | | | Water heating energy efficiency class | | | | A+ (3) | | | |
| | | | | | | | | | A+++ (3) | | | |

| Indoor Unit | | | | EHVX | 04S18D3V(G)/ D6V(G) | 04S23D3V(G)/ D6V(G) | 08S18D6V(G)/ D9W(G) | 08S23D6V(G)/ D9W(G) | 08S18D6V(G)/ D9W(G) | 08S23D6V(G)/ D9W(G) |
|----------------------|---------------------------|---------------------|-----------|---------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Casing | Colour | White + Black | | | | | | | | |
| | Material | Resin / Sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,850x595x625 |
| Weight | Unit | | kg | 131 | 139 | 131 | 139 | 131 | 139 | 139 |
| Tank | Water volume | | l | 180 | 230 | 180 | 230 | 180 | 230 | 230 |
| | Maximum water temperature | | °C | 70 | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | |
| | Corrosion protection | | | Pickling | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | | | | |
| | | Water side | Min.~Max. | °C | | | | | | |
| | Cooling | Ambient | Min.~Max. | °CDB | | | | | | |
| | | Water side | Min.~Max. | °C | | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | | | |
| | | Water side | Max. | °C | | | | | | |
| Sound power level | Nom. | | dBA | 42 | | | | | | |
| Sound pressure level | Nom. | | dBA | 28 | | | | | | |


| Outdoor Unit | | | | ERGA | 04DV | 06DV | 08DV | |
|-------------------|------------------------------|--------------------|---------------------|--------------------------------------|------|------|------|----|
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | | | |
| Weight | Unit | | kg | 58.5 | | | | |
| Compressor | Quantity | | | 1 | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10~43 | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25~35 | | | | |
| Refrigerant | Type | | | R-32 | | | | |
| | GWP | | | 675.0 | | | | |
| | Charge | | kg | 1.50 | | | | |
| | Charge | | TCO ₂ Eq | 1.01 | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | | 60 | | 62 |
| | | | | 61 | | 62 | | |
| | Cooling | Nom. | dBA | 44 | | 47 | | 49 |
| | | | | 48 | | 49 | | 50 |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | V3/1N~/50/230 | | | | | |
| Current | Recommended fuses | A | 25 | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split integrated Bi-Zone

Floor standing integrated with **two different temperature zones monitoring**














- › A combined stainless steel domestic hot water tank of 180 or 230L and heat pump for easy installation
- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -25°C



| Efficiency data | | | | EHVZ + ERGA | | 04S18D6V(G) + 04DV | 08S18D6V(G)/D9W(G) + 06DV | 08S23D6V(G)/D9W(G) + 06DV | 08S18D6V(G)/D9W(G) + 08DV | 08S23D6V(G)/D9W(G) + 08DV |
|----------------------------|-----------------------------------|---------------------------------------|--|---------------------|---|--------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Heating capacity | Nom. | | | | | kW | 4.30 (1) / 4.60 (2) | 6.00 (1) / 5.90 (2) | 7.50 (1) / 7.80 (2) | |
| Power input | Heating | Nom. | | | | kW | 0.850 (1) / 1.26 (2) | 1.24 (1) / 1.69 (2) | 1.63 (1) / 2.23 (2) | |
| COP | | | | | | | 5.10 (1) / 3.65 (2) | 4.85 (1) / 3.50 (2) | 4.60 (1) / 3.50 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | | | 3.26 | | 3.32 | |
| | | | ηs (Seasonal space heating efficiency) | | | % | 127 | | 130 | |
| | | Seasonal space heating eff. class | | | | A++ | | | | |
| | General | SCOP | 4.48 | 4.47 | | 4.56 | | | | |
| Domestic hot water heating | Average climate | General | Declared load profile | | | | L | XL | L | XL |
| | | ηwh (water heating efficiency) | | | % | 125 | 133 | 125 | 133 | |
| | | Water heating energy efficiency class | | | | A+ (3) | | | | |
| | | | | | | A+++ (3) | | | | |
| Indoor Unit | | | | EHVZ | | 04S18D6V(G) | 08S18D6V(G)/D9W(G) | 08S23D6V(G)/D9W(G) | 08S18D6V(G)/D9W(G) | 08S23D6V(G)/D9W(G) |
| Casing | Colour | | | White + Black | | | | | | |
| | Material | | | Resin / Sheet metal | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | |
| | Weight | Unit | kg | | | 136 | 144 | 136 | 144 | |
| Tank | Water volume | Unit | l | | | 180 | 230 | 180 | 230 | |
| | Maximum water temperature | Unit | °C | | | 70 | | | | |
| | Maximum water pressure | Unit | bar | | | 10 | | | | |
| | Corrosion protection | | | Pickling | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | 5~30 | | | |
| | | Water side | Min.~Max. | °C | | | 15~65 | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | 5~35 | | | |
| | | Water side | Max. | °C | | | 70 | | | |
| Sound power level | Nom. | Unit | dBA | | | 42 | | | | |
| Sound pressure level | Nom. | Unit | dBA | | | 28 | | | | |
| Outdoor Unit | | | | ERGA | | 04DV | 06DV | 08DV | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | 740x884x388 | | | | |
| | Weight | Unit | kg | | | 58.5 | | | | |
| Compressor | Quantity | | | | | 1 | | | | |
| | Type | | | | | Hermetically sealed swing compressor | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | 10~43 | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | -25~35 | | | | |
| Refrigerant | Type | | | | | R-32 | | | | |
| | GWP | | | | | 675.0 | | | | |
| | Charge | Unit | kg | | | 1.50 | | | | |
| | Charge | Unit | TCO ₂ Eq | | | 1.01 | | | | |
| | Control | | | | | Expansion valve | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | | 60 | | | 62 | |
| | Cooling | Nom. | dBA | 61 | | | 62 | | | |
| Sound pressure level | Heating | Nom. | dBA | 44 | | 47 | | | 49 | |
| | Cooling | Nom. | dBA | 48 | | 49 | | | 50 | |
| Power supply | Name/Phase/Frequency/Voltage | Unit | Hz/V | | | V3/1N~/50/230 | | | | |
| Current | Recommended fuses | Unit | A | | | 25 | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| | Type | Material name | Daikin Altherma 3 RF |
|----------------|---|-----------------------------------|-----------------------------------|
| Controls |  | Remote user interface | BRC1HHDW/S/K ● |
| |  | LAN Adapter + PV Solar connection | BRP069A61 ● |
| |  | LAN only | BRP069A62 ● |
| |  | Room thermostat (wired) | EKRTWA ● |
| |  | Room thermostat (wireless) | EKRTR1 ● |
| |  | External sensor | EKRTETS ● |
| Adapter |  | Demand PCB | EKRP1AHTA ● |
| |  | Digital I/O PCB | EKRP1HBAA ● |
| Back-up heater |  | Back-up heater kit | EKLBUEHC6W1 • only for EHVH-DV(G) |
| Installation |  | Bi-Zone kit (watts kit) | BZKA7V3 • (excluding EHVZ) |
| Sensors |  | Remote indoor sensor | KRCS01-1 ● |
| |  | Remote outdoor sensor | EKRSCA-1 ● |
| Others |  | PC USB Cable | EKPCCAB4 ● |
| | | Conversion kit | EKHBCONV ● |
| | | Low sound cover for ERGA-D | EKLN-A ● |



Daikin Altherma 3 R ECH₂O

The Daikin Altherma low temperature split integrated ECH₂O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling.

Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
- › Electronic management of both heat pump and ECH₂O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection


Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

ECH₂O

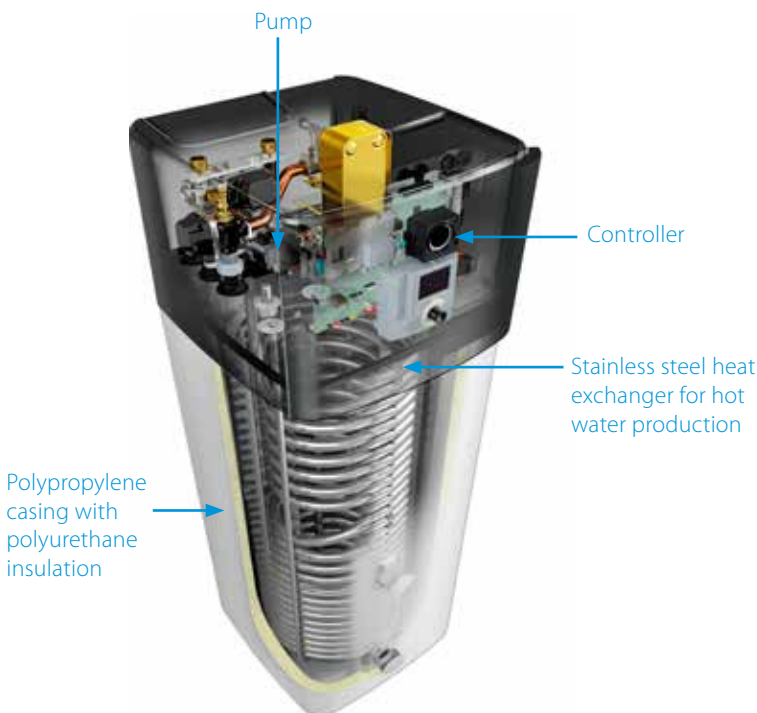

Advanced user interface



The Daikin-Eye

The intuitive Daikin eye shows you in real time the status of your system. Blue is perfect! Should the eye turn red, an error has occurred.

Quick to configure

Log in and you'll be able to completely configure the unit in less than 10 steps. You can even check if the unit is ready for use by running test cycles!

Easy operation

The user interface works really fast thanks to its icon-based menus.

Beautiful design

The interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

ECH₂O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options



Pressureless (drain-back) solar system (EHS-D, EHSX-D)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system (EHSB-D, EHSXB-D)

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed

Monthly energy consumption of an average detached house

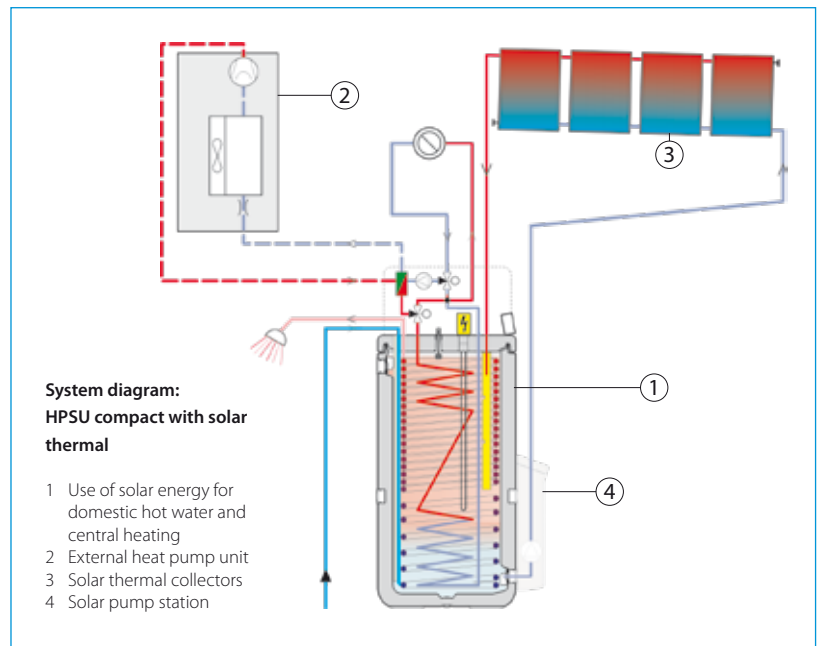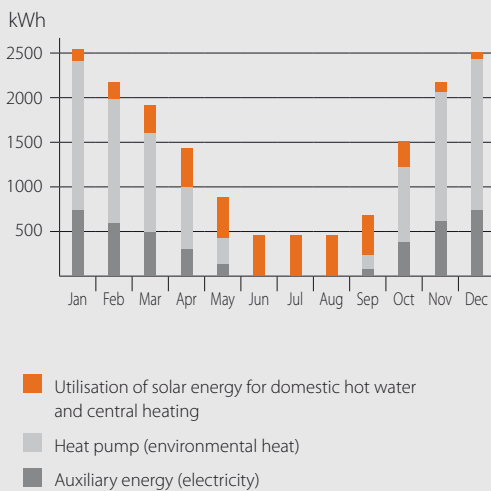

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



(3)

011-IW0262
 011-IW0264 → 267

| Efficiency data | | EHS + ERGA | | 04P30D + 04DV | 08P30D + 06DV | 08P50D + 06DV | 08P30D + 08DV | 08P50D + 08DV |
|--|-----------------------------------|-----------------------|--|---------------------|---------------------|---------------|---------------------|---------------|
| Heating capacity | Nom. | kW | | 4.30 (1) / 4.60 (2) | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | |
| Power input | Heating | kW | | 0.85 (1) / 1.26 (2) | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | |
| COP | | | | 5.10 (1) / 3.65 (2) | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.26 | | | 3.32 | |
| | | | η _s (Seasonal space heating efficiency) | 127 | | | 130 | |
| | Seasonal space heating eff. class | | A++ | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 4.48 | 4.47 | | 4.56 | |
| η _s (Seasonal space heating efficiency) | | | 176 | | | 179 | | |
| Seasonal space heating eff. class | | A+++ (3) | | | | | | |
| Domestic hot water heating | General Average climate | Declared load profile | η _{wh} (water heating efficiency) | % | L | XL | L | XL |
| | | | | | 108 | 106 | 108 | 106 |
| Water heating energy efficiency class | | A | | | | | | |

| Indoor Unit | | EHS | | 04P30D | 08P30D | 08P50D | 08P30D | 08P50D |
|----------------------|---------------------------|---|-----------|--------------|--------|--------------|--------------|--------------|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1891x595x615 | | 1896x790x790 | 1891x595x615 | 1896x790x790 |
| Weight | Unit | kg | | | | | | |
| Tank | Water volume | l | | | | | | |
| | Maximum water temperature | °C | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | | |
| | | Water side | Min.~Max. | °C | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | |
| | | Water side | Min.~Max. | °C | | | | |
| Sound power level | Nom. | dBA | | | | | | |
| Sound pressure level | Nom. | dBA | | | | | | |


| Outdoor Unit | | ERGA | | 04DV | 06DV | 08DV |
|----------------------|------------------------------|--------------------------------------|------|-------------|------|------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | |
| Weight | Unit | kg | | | | |
| Compressor | Quantity | 1 | | | | |
| | Type | Hermetically sealed swing compressor | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | |
| Refrigerant | Type | R-32 | | | | |
| | GWP | 675.0 | | | | |
| | Charge | kg | | | | |
| | Charge | TCO ₂ Eq | | | | |
| Control | | Expansion valve | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | 60 | 62 |
| | Cooling | Nom. | dBA | 61 | | 62 |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | 49 |
| | Cooling | Nom. | dBA | 48 | 49 | 50 |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | | | |
| Current | Recommended fuses | A | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
 (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for **bivalent heating and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



| Efficiency data | | EHSB + ERGA | | 04P30D + 04DV | 08P30D + 06DV | 08P50D + 06DV | 08P30D + 08DV | 08P50D + 08DV |
|----------------------------|-----------------------------------|--|--|---------------------|---------------------|---------------|---------------------|---------------|
| Heating capacity | Nom. | kW | | 4.30 (1) / 4.60 (2) | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | |
| Power input | Heating | kW | | 0.85 (1) / 1.26 (2) | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | |
| COP | Nom. | | | 5.10 (1) / 3.65 (2) | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.26 | | | 3.32 | |
| | | | η _s (Seasonal space heating efficiency) Seasonal space heating eff. class | 127 | | | 130 | |
| | Average climate water outlet 35°C | General | SCOP | 4.48 | 4.47 | | 4.56 | |
| | | | η _s (Seasonal space heating efficiency) Seasonal space heating eff. class | 176 | | | 179 | |
| Domestic hot water heating | General | Declared load profile | | L | | XL | L | XL |
| | Average climate | r _{wh} (water heating efficiency) Water heating energy efficiency class | | 108 | | 109 | 108 | 109 |

| Indoor Unit | | EHSB | 04P30D | 08P30D | 08P50D | 08P30D | 08P50D |
|----------------------|---------------------------|---|-----------|--------------|--------------|--------------|--------------|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | |
| | Material | Impact resistant polypropylene | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1891x595x615 | 1896x790x790 | 1891x595x615 | 1896x790x790 |
| Weight | Unit | | kg | 73 | 93 | 73 | 93 |
| Tank | Water volume | | l | 294 | 477 | 294 | 477 |
| | Maximum water temperature | | °C | 85 | | | |
| Operation range | Heating | Ambient | Min.~Max. | -25~-25 | | | |
| | | Water side | Min.~Max. | 18~-65 | | | |
| | Domestic hot water | Ambient | Min.~Max. | -25~-35 | | | |
| | | Water side | Min.~Max. | 25~-55 | | | |
| Sound power level | Nom. | | dBA | 39.1 | | | |
| Sound pressure level | Nom. | | dBA | 28 | | | |

| Outdoor Unit | | ERGA | 04DV | 06DV | 08DV | |
|----------------------|------------------------------|--------------------|---------------------|------|------|--------------------------------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | | | 740x884x388 |
| Weight | Unit | | kg | | | 58.5 |
| Compressor | Quantity | | | | | 1 |
| | Type | | | | | Hermetically sealed swing compressor |
| Operation range | Cooling | Min.~Max. | °CDB | | | 10.0~43.0 |
| | Domestic hot water | Min.~Max. | °CDB | | | -25~-35 |
| Refrigerant | Type | | | | | R-32 |
| | GWP | | | | | 675.0 |
| | Charge | | kg | | | 1.50 |
| | Charge Control | | TCO ₂ Eq | | | 1.01 |
| Sound power level | Heating | Nom. | dBA | 58 | 60 | 62 |
| | Cooling | Nom. | dBA | 61 | | 62 |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | 49 |
| | Cooling | Nom. | dBA | 48 | 49 | 50 |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | | | V3/1N~/50/230 |
| Current | Recommended fuses | | A | | | 25 |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for heating, cooling and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



| Efficiency data | | | EHSX + ERGA | 04P30D + 04DV | 04P50D + 04DV | 08P30D + 06DV | 08P50D + 06DV | 08P30D + 08DV | 08P50D + 08DV |
|----------------------------|-----------------------------------|---------|--|--|---------------|---------------------|---------------|---------------------|---------------|
| Heating capacity | Nom. | | kW | 4.30 (1) / 4.60 (2) | | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | |
| Power input | Heating | Nom. | kW | 0.85 (1) / 1.26 (2) | | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | |
| Cooling capacity | Nom. | | kW | 5.56 (1) / 4.37 (2) | | 5.96 (1) / 4.87 (2) | | 6.25 (1) / 5.35 (2) | |
| Power input | Cooling | Nom. | kW | 0.94 (1) / 1.14 (2) | | 1.06 (1) / 1.33 (2) | | 1.16 (1) / 1.51 (2) | |
| COP | | | | 5.10 (1) / 3.65 (2) | | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | |
| EER | | | | 5.94 (1) / 3.84 (2) | | 5.61 (1) / 3.67 (2) | | 5.40 (1) / 3.54 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.26 | | | 3.32 | |
| | | | η _s (Seasonal space heating efficiency) | | 127 | | | 130 | |
| | | General | Seasonal space heating eff. class | | | | A++ | | |
| | Average climate water outlet 35°C | General | SCOP | 4.48 | | 4.47 | | 4.56 | |
| | | General | η _s (Seasonal space heating efficiency) | | 176 | | | 179 | |
| | | General | Seasonal space heating eff. class | | | | A+++ (3) | | |
| Domestic hot water heating | Average climate | General | Declared load profile | L | XL | L | XL | L | XL |
| | | | | η _{wh} (water heating efficiency) | 108 | 106 | 108 | 106 | 108 |
| | | | Water heating energy efficiency class | | | | A | | |


| Indoor Unit | | | EHSX | 04P30D | 04P50D | 08P30D | 08P50D | 08P30D | 08P50D |
|----------------------|------------------------------|--------------------|---------------------|---|--------------------------------------|--------------|--------------|--------------|--------------|
| Casing | Colour | | | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | |
| | Material | | | Impact resistant polypropylene | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1891x595x615 | 1896x790x790 | 1891x595x615 | 1896x790x790 | 1891x595x615 | 1896x790x790 |
| Weight | Unit | | kg | 73 | 93 | 73 | 93 | 73 | 93 |
| Tank | Water volume | | l | 294 | 477 | 294 | 477 | 294 | 477 |
| | Maximum water temperature | | °C | | | | 85 | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | -25~-25 | | |
| | | Water side | Min.~Max. | °C | | | 18~-65 | | |
| | Cooling | Ambient | Min.~Max. | °CDB | | | 10~43 | | |
| | | Water side | Min.~Max. | °C | | | 5~-22 | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | -25~35 | | |
| | | Water side | Min.~Max. | °C | | | 25~55 | | |
| Sound power level | Nom. | | dB(A) | | | 39.1 | | | |
| Sound pressure level | Nom. | | dB(A) | | | 28 | | | |
| Outdoor Unit | | | ERGA | 04DV | 06DV | 08DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | 740x884x388 | | | | |
| Weight | Unit | | kg | | 58.5 | | | | |
| Compressor | Quantity | | | | 1 | | | | |
| | Type | | | | Hermetically sealed swing compressor | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | 10.0~43.0 | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | -25~35 | | | | |
| Refrigerant | Type | | | | R-32 | | | | |
| | GWP | | | | 675.0 | | | | |
| | Charge | | kg | | 1.50 | | | | |
| | Charge | | TCO ₂ Eq | | 1.01 | | | | |
| Sound power level | Heating | Nom. | dB(A) | 58 | 60 | 62 | | | |
| | Cooling | Nom. | dB(A) | 61 | | | 62 | | |
| Sound pressure level | Heating | Nom. | dB(A) | 44 | 47 | 49 | | | |
| | Cooling | Nom. | dB(A) | 48 | 49 | 50 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | | V3/IN~/50/230 | | | | |
| Current | Recommended fuses | | A | | 25 | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for **bivalent heating, cooling and hot water** with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation












| Efficiency data | | | EHSXB + ERGA | 04P30D + 04DV | 04P50D + 04DV | 08P30D + 06DV | 08P50D + 06DV | 08P30D + 08DV | 08P50D + 08DV |
|----------------------------|-----------------------------------|--|--|---------------------|---------------|---------------------|---------------|---------------------|---------------|
| Heating capacity | Nom. | | kW | 4.30 (1) / 4.60 (2) | | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | |
| Power input | Heating | Nom. | kW | 0.85 (1) / 1.26 (2) | | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | |
| Cooling capacity | Nom. | | kW | 5.56 (1) / 4.37 (2) | | 5.96 (1) / 4.87 (2) | | 6.25 (1) / 5.35 (2) | |
| Power input | Cooling | Nom. | kW | 0.94 (1) / 1.14 (2) | | 1.06 (1) / 1.33 (2) | | 1.16 (1) / 1.51 (2) | |
| COP | | | | 5.10 (1) / 3.65 (2) | | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | |
| EER | | | | 5.94 (1) / 3.84 (2) | | 5.61 (1) / 3.67 (2) | | 5.40 (1) / 3.54 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.26 | | | 3.32 | |
| | | | η _s (Seasonal space heating efficiency) | % | 127 | | | 130 | |
| | Average climate water outlet 35°C | General | SCOP | | 4.48 | | 4.47 | | 4.56 |
| | | | η _s (Seasonal space heating efficiency) | % | | 176 | | | 179 |
| | | | Seasonal space heating eff. class | | | A++ | | | |
| | | | Seasonal space heating eff. class | | | A+++ (3) | | | |
| Domestic hot water heating | General | Declared load profile | | L | XL | L | XL | L | XL |
| | Average climate | η _{wh} (water heating efficiency) | | 108 | 109 | 108 | 109 | 108 | 109 |
| | | | Water heating energy efficiency class | | | A | | | |

| Indoor Unit | | | EHSXB | 04P30D | 04P50D | 08P30D | 08P50D | 08P30D | 08P50D |
|----------------------|------------------------------|---|---------------------|--------------------------------------|--------------|--------------|--------------|--------------|--------------|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1891x595x615 | 1896x790x790 | 1891x595x615 | 1896x790x790 | 1891x595x615 | 1896x790x790 |
| Weight | Unit | | kg | 76 | 99 | 76 | 99 | 76 | 99 |
| Tank | Water volume | | l | 294 | 477 | 294 | 477 | 294 | 477 |
| | Maximum water temperature | | °C | | | 85 | | | |
| Operation range | Heating | Ambient | Min.~Max. | -25~-25 | | | | | |
| | | Water side | Min.~Max. | 18~-65 | | | | | |
| | Cooling | Ambient | Min.~Max. | °CDB 10~-43 | | | | | |
| | | Water side | Min.~Max. | °C 5~-22 | | | | | |
| Domestic hot water | Ambient | Min.~Max. | °CDB -25~-35 | | | | | | |
| | Water side | Min.~Max. | °C 25~-55 | | | | | | |
| Sound power level | Nom. | | dBA | 39.1 | | | | | |
| Sound pressure level | Nom. | | dBA | 28 | | | | | |
| Outdoor Unit | | | ERGA | 04DV | 06DV | 08DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | | | | |
| Weight | Unit | | kg | 58.5 | | | | | |
| Compressor | Quantity | | | 1 | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | | |
| Refrigerant | Type | | | R-32 | | | | | |
| | GWP | | | 675.0 | | | | | |
| | Charge | | kg | 1.50 | | | | | |
| | Charge | | TCO ₂ Eq | 1.01 | | | | | |
| Sound power level | Heating | Nom. | dBA | Expansion valve | | | | | |
| | | | dBA | 58 | 60 | | | 62 | |
| | | | dBA | 61 | 62 | | | 62 | |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | | | 49 | |
| | Cooling | Nom. | dBA | 48 | 49 | | | 50 | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1N~/50/230 | | | | | |
| Current | Recommended fuses | | A | 25 | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| Type | Daikin Altherma 3 R ECH ₂ O | Material name |
|------------------------|---|---|
| Controls |  | Room thermostat RoCon U1 / EHS157034 |
| |  | Mixer module RoCon M1 / EHS157068 |
| |  | Remote outdoor sensor EKRSC1 |
| |  | Gateway for apps RoCon G1 / EHS157056 |
| Back-up heater | | Back-up heater 1 kW + Switchbox EKBUB1C + EKBUHSWB |
| |  | Back-up heater 3 kW + Switchbox EKBUB3C + EKBUHSWB |
| | | Back-up heater 9 kW + Switchbox EKBUB9C + EKBUHSWB |
| Hydraulics |  | Hydraulic separator HWC / 172900 |
| |  | Heat insulation for HWC WHWC / 172901 |
| Pump group |  | Pump group with mixer module 156075 |
| | | Pump group without mixer module 156077 |
| Additional connections |  | Dirt separator SAS1 SAS1 / 156021 |
| |  | Dirt separator SAS2 SAS2 / 156023 |
| | | Biv connector kit 141589 |
| | | DB connector kit 141590 |
| | | Terminal connection kit 141592 |
| Other | | Connector external heater 141591 |
| | | Low sound cover for ERGA-D EKLN-A |






Daikin Altherma 3 R W wall mounted unit

Why choose Daikin wall mounted unit?

The Daikin Altherma 3 split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel or ECH₂O thermal store

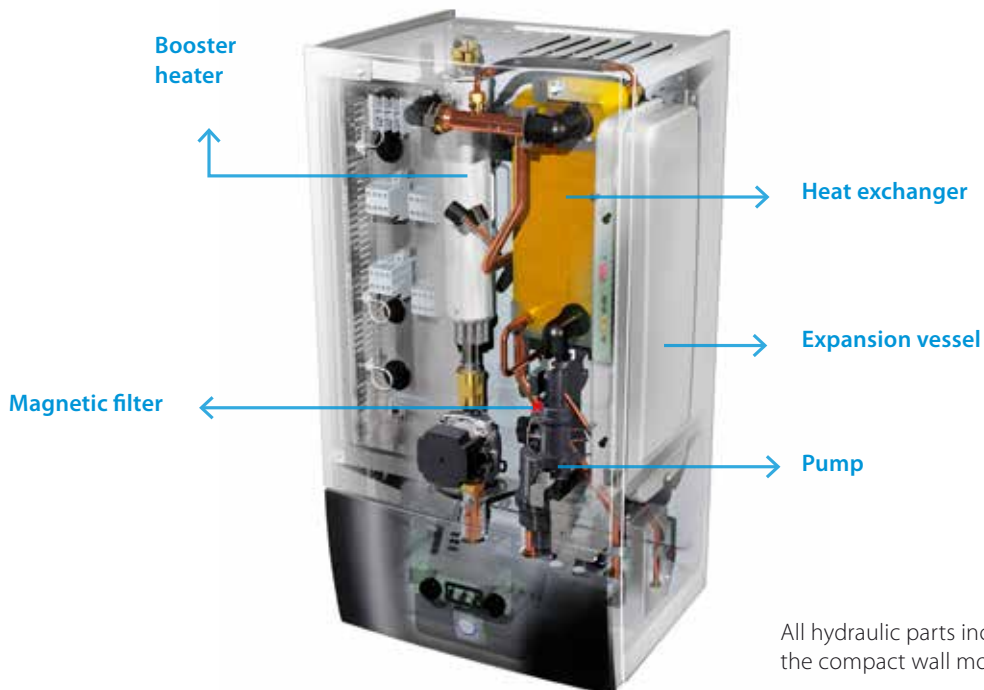

All hydraulic parts included in the compact wall mounted unit

Flexibility in providing domestic hot water

If the end user only requires hot water and installation height is limited, a separate tank can provide the required installation flexibility. At the side of our standard stainless steel tanks, we propose the ECH₂O thermal stores.

ECH₂O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: with high tapping performance
- › Fit for future possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build on the unit combined with cascade principle offers flexible installation options




Example of installation with a stainless steel domestic hot water tank.



Daikin Altherma 3 low temperature split wall mounted unit

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required.
- > The unit's sleek design blends in with other household appliances.
- > Combine with a stainless steel tank or ECH₂O thermal store.
- > Outdoor unit extracts heat from the outdoor air, even at -25°C



| Efficiency data | | | | EHBH + ERGA | 04D6V + 04DV | 08D6V + 06DV | 08D9W + 06DV | 08D6V + 08DV | 08D9W + 08DV |
|----------------------|-----------------------------------|----------------------|--|--------------------------------------|---------------------|--------------|---------------------|--------------|--------------|
| Heating capacity | Nom. | | kW | 4.30 (1) / 4.60 (2) | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | | |
| Power input | Heating | Nom. | kW | 0.85 (1) / 1.26 (2) | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | | |
| COP | | | | 5.10 (1) / 3.65 (2) | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.26 | | 3.32 | | 3.32 | |
| | | | η _s (Seasonal space heating efficiency) | 127 | | 130 | | 130 | |
| | Average climate water outlet 35°C | General | SCOP | 4.48 | | 4.47 | | 4.56 | |
| | | | η _s (Seasonal space heating efficiency) | 176 | | 179 | | 179 | |
| | | | | Seasonal space heating eff. class | | | | | |
| | | | | A++ | | | | | |
| | | | | A+++ (3) | | | | | |
| Indoor Unit | | | | EHBH | 04D6V | 08D6V | 08D9W | 08D6V | 08D9W |
| Casing | Colour | White + Black | | | | | | | |
| | Material | Resin, sheet metal | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 840x440x390 | | | | | |
| Weight | Unit | | kg | 42.0 | 42.4 | 42.0 | 42.4 | | |
| Operation range | Heating | Water side Min.~Max. | °C | 15 ~65 | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | 25~75 | | | | | |
| Sound power level | Nom. | | dBA | 42 | | | | | |
| Sound pressure level | Nom. | | dBA | 28 | | | | | |
| Outdoor Unit | | | | ERGA | 04DV | 06DV | 08DV | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | | | | |
| Weight | Unit | | kg | 58.5 | | | | | |
| Compressor | Quantity | | | 1 | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10~43 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25~35 | | | | | |
| Refrigerant | Type | | | R-32 | | | | | |
| | GWP | | | 675.0 | | | | | |
| | Charge | | kg | 1.50 | | | | | |
| | Charge | | TCO ₂ Eq | 1.01 | | | | | |
| | Control | | | Expansion valve | | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | 60 | 62 | | | |
| | Cooling | Nom. | dBA | 61 | 62 | | | | |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | 49 | | | |
| | Cooling | Nom. | dBA | 48 | 49 | 50 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1N~/50/230 | | | | | |
| Current | Recommended fuses | | A | 25 | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 low temperature split wall mounted unit

Wall mounted **reversible** air-to-water heat pump ideal for low energy houses

- > Inclusion of all hydraulic components means no third party components are required
- > PCB board and hydraulic components are located in the front for easy access
- > Compact dimensions allows for small installation space, as almost no side clearances are required.
- > The unit's sleek design blends in with other household appliances.
- > Combine with a stainless steel tank or ECH₂O thermal store.
- > Outdoor unit extracts heat from the outdoor air, even at -25°C



011-1W0218-219
011-1W0221
011-1W0246-247
















Heat pumps

| Efficiency data | | | | EHBX + ERGA | 04D6V + 04DV | 08D6V + 06DV | 08D9W + 06DV | 08D6V + 08DV | 08D9W + 08DV | |
|----------------------|-----------------------------------|----------------------|--|-----------------|----------------------|---------------------|--------------|---------------------|--------------------------------------|--|
| Heating capacity | Nom. | | | kW | 4.30 (1) / 4.60 (2) | 6.00 (1) / 5.90 (2) | | 7.50 (1) / 7.80 (2) | | |
| Power input | Heating | Nom. | | kW | 0.850 (1) / 1.26 (2) | 1.24 (1) / 1.69 (2) | | 1.63 (1) / 2.23 (2) | | |
| Cooling capacity | Nom. | | | kW | 5.56 (1) / 4.37 (2) | 5.96 (1) / 4.87 (2) | | 6.25 (1) / 5.35 (2) | | |
| Power input | Cooling | Nom. | | kW | 0.940 (1) / 1.14 (2) | 1.06 (1) / 1.33 (2) | | 1.16 (1) / 1.51 (2) | | |
| COP | | | | | 5.10 (1) / 3.65 (2) | 4.85 (1) / 3.50 (2) | | 4.60 (1) / 3.50 (2) | | |
| EER | | | | | 5.94 (1) / 3.84 (2) | 5.61 (1) / 3.67 (2) | | 5.40 (1) / 3.54 (2) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.26 | | 3.32 | | | |
| | | | ηs (Seasonal space heating efficiency) | % | 127 | | 130 | | | |
| | Average climate water outlet 35°C | General | SCOP | | 4.48 | | 4.47 | | 4.56 | |
| | | | ηs (Seasonal space heating efficiency) | % | 176 | | 179 | | | |
| | | | Seasonal space heating eff. class | A+++ (3) | | | | | | |
| Indoor Unit | | | | EHBX | 04D6V | 08D6V | 08D9W | 08D6V | 08D9W | |
| Casing | Colour | | | | | | | | White + Black | |
| | Material | | | | | | | | Resin, sheet metal | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 840x440x390 | | | | | | |
| Weight | Unit | | kg | 42.0 | | 42.4 | | 42.0 | 42.4 | |
| Operation range | Heating | Water side Min.~Max. | °C | 15 ~65 | | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | 25~75 | | | | | | |
| Sound power level | Nom. | | dBA | 42 | | | | | | |
| Sound pressure level | Nom. | | dBA | 28 | | | | | | |
| Outdoor Unit | | | | ERGA | 04DV | 06DV | 08DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 740x884x388 | | | | | | |
| Weight | Unit | | kg | 58.5 | | | | | | |
| Compressor | Quantity | | | | | | | | 1 | |
| | Type | | | | | | | | Hermetically sealed swing compressor | |
| Operation range | Cooling | Min.~Max. | °CDB | 10~43 | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25~35 | | | | | | |
| Refrigerant | Type | | | | | | | | R-32 | |
| | GWP | | | | | | | | 675.0 | |
| | Charge | | kg | 1.50 | | | | | | |
| | Charge Control | | TCO ₂ Eq | 1.01 | | | | | | |
| | | | | Expansion valve | | | | | | |
| Sound power level | Heating | Nom. | dBA | 58 | 60 | | 62 | | | |
| | Cooling | Nom. | dBA | 61 | | | 62 | | | |
| Sound pressure level | Heating | Nom. | dBA | 44 | 47 | | 49 | | | |
| | Cooling | Nom. | dBA | 48 | 49 | | 50 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1N~/50/230 | | | | | | |
| Current | Recommended fuses | | A | 25 | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| | Type | Material name | Daikin Altherma 3 R W | |
|----------------|---|-----------------------------------|-----------------------|---|
| Controls |  | Remote user interface | BRC1HHDW/S/K | ● |
| |  | LAN Adapter + PV Solar connection | BRP069A61 | ● |
| |  | LAN only | BRP069A62 | ● |
| |  | Room thermostat (wired) | EKRTWA | ● |
| |  | Room thermostat (wireless) | EKRTR1 | ● |
| |  | External sensor | EKRTETS | ● |
| Adapter |  | Demand PCB | EKRP1AHTA | ● |
| |  | Digital I/O PCB | EKRP1HBAA | ● |
| Back-up heater |  | Back-up heater kit | EKLBUHCB6W1 | |
| Installation |  | Bi-Zone kit (watts kit) | BZKA7V3 | ● |
| Sensors |  | Remote indoor sensor | KRCS01-1 | ● |
| |  | Remote outdoor sensor | EKRSCA-1 | ● |
| Others |  | PC USB Cable | EKPCCAB4 | ● |
| | | Conversion kit | EKHBCONV | ● |
| | | | EKHVCONV | |
| | | Low sound cover for ERGA-D | EKLN-A | ● |





Daikin Altherma 3 H EPGA-D 11-14-16 kW

powered by Bluevolution with R-32

R-32, the environmentally-friendly refrigerant

Bluevolution


The Bluevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.

BLUEEVOLUTION

R-32


Environmentally-friendly

Thanks to the combination of its lower GWP (675 vs. 2087, 5 for R-410A) and a lower refrigerant charge, R-32 is able to reduce by 75% its CO₂ equivalent which makes it better for the environment.

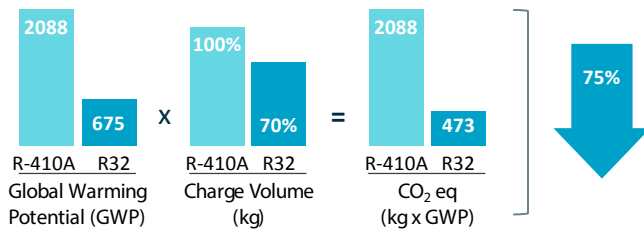

The hydrosplit concept

Looking ahead to a better future

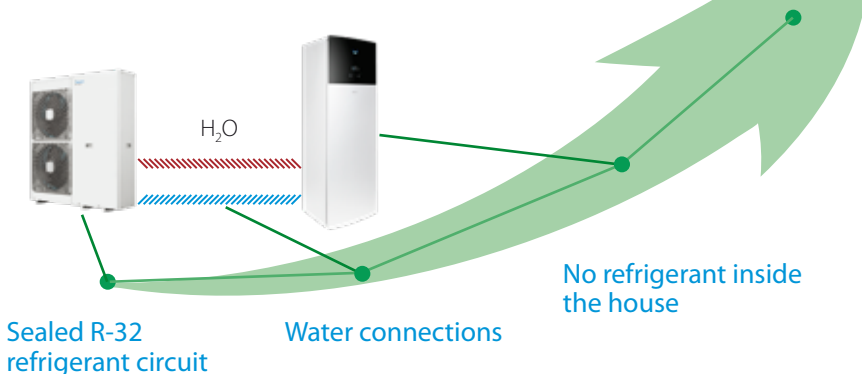

With R-32, the future is now

Pioneer in the use of R-32 in air-to-water heat pumps, Daikin places the reduction of its environment impact as an absolute priority.



Gas injection advantage

Higher capacity at low ambient


The Daikin Altherma 3 11-16 kW outdoor unit is equipped with a new gas injection scroll compressor allowing the unit to operate down to -28°C outside temperature.

Moreover, the heating capacity at low ambient temperature (-7/35°C) sees an improvement of 35% compared to its predecessor.

Convenient for sensitive urban areas

Low sound installer setting

In order to fulfill the requirements of the most sound sensitive urban areas, the installer can set up the unit in low sound mode that reduce the sound level by -3 dB(A).

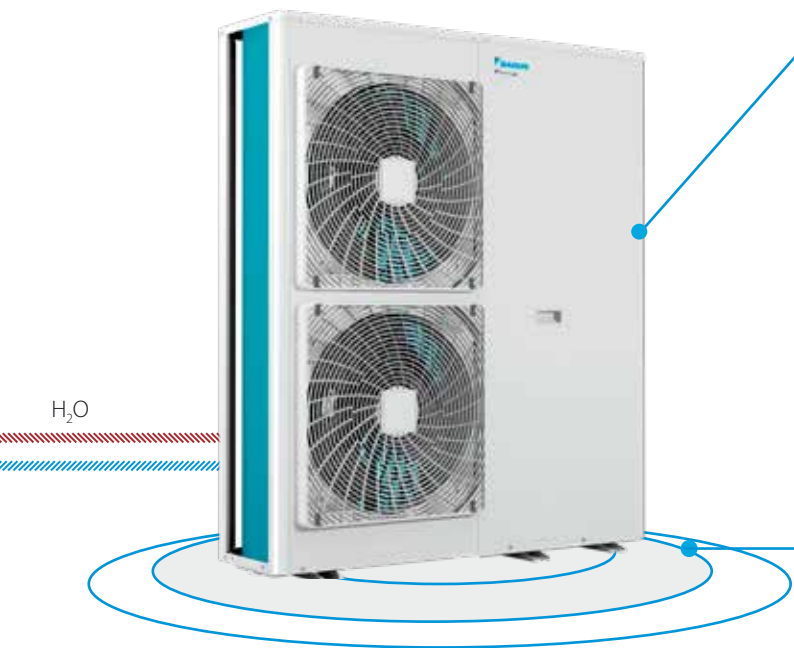

Higher performances

Leaving water temperature

With a leaving water temperature of 60°C at -10°C outside, the Daikin Altherma 3 11-14-16 kW is perfect:

- For new build applications using underfloor heating;
- For renovation applications using radiators.

Top energy performances

Thanks to the use of R-32, the unit reaches the highest energy performances represented by the best energy labels.

Daikin Altherma 3 11-14-16 kW outdoor unit

The outdoor unit EPGA-D is available in size 11-14-16 kW 1 phase and is connectable to:

- EAB(H/X)-D wall mounted indoor units;
- EAV(H/X)-D tank integrated floor standing indoor units;
- EAVZ-D tank integrated and Bi-Zone floor standing indoor units.



(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.



Daikin Altherma 3 H F


with integrated domestic hot water tank

Why choose Daikin floor standing unit with integrated domestic hot water tank?

The Daikin Altherma 3 H floor standing unit is the ideal system **to deliver heating, domestic hot water and cooling** for new build and low energy houses.

Easy to install

Small footprint & practical handles



The floor standing unit is designed to be handled easily thanks to its practical handles and without cutting edges. Its small footprint facilitates the installation in smaller spaces and the access to all the hydraulic components helps the installer to work on the unit without effort.



Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on a USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

A complete range to answer all needs

Heating only models - EAVH-D

The heating only Daikin Altherma 3 models provide domestic hot water and space heating in an efficient way.

Reversible models - EAVX-D

Additionally to its core function, Daikin Altherma 3 can provide cooling during hot season.

This cooling function is working via emitters such as an underfloor system or thanks to a fancoil.

Bi-Zone models - EAVZ-D

Daikin also provides a third option to satisfy all the needs: the Daikin Altherma 3 Bi-Zone models. Bi-Zone means that the unit can manage two different water temperature zones at the same time, for instance radiators (45°C) in the bedroom and underfloor heating (35°C) in the living room.



Colour choice



White

Silver-grey

Capacity and sizes



180 or 230 L
1650 or 1850 mm

Daikin Altherma 3 heating only models

Floor standing air to water heat pump for **heating and hot water**; ideal for low energy houses

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



011-1W0319 -> 324

up to



A+++

(3)



A

60°C

R-32

| Efficiency data | | | | EAVH + EPGA | 16S18D6V(G)/ D9W(G) + 11DV | 16S23D6V(G)/ D9W(G) + 11DV | 16S18D6V(G)/ D9W(G) + 14DV | 16S23D6V(G)/ D9W(G) + 14DV | 16S18D6V(G)/ D9W(G) + 16DV | 16S23D6V(G)/ D9W(G) + 16DV | |
|--|-----------------------------------|---------------------------------------|--|---------------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--|
| Heating capacity | Nom. | | | kW | | 11.1 (1) / 11.3 (2) | | 14.5 (1) / 14.5 (2) | | 16.5 (1) / 15.6 (2) | |
| Power input | Heating | Nom. | | kW | | 2.16 (1) / 2.91 (2) | | 2.91 (1) / 3.96 (2) | | 3.45 (1) / 4.21 (2) | |
| COP | | | | | | 5.15 (1) / 3.88 (2) | | 4.99 (1) / 3.65 (2) | | 4.78 (1) / 3.71 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | % | | 3.29 | | 3.34 | | 3.41 | |
| | | | η _s (Seasonal space heating efficiency) | % | | 129 | | 130 | | 133 | |
| | Seasonal space heating eff. class | | | | | A++ | | | | | |
| | Average climate water outlet 35°C | General | SCOP | % | | 4.38 | | 4.45 | | 4.56 | |
| η _s (Seasonal space heating efficiency) | | | % | | 172 | | 175 | | 179 | | |
| Seasonal space heating eff. class | | | | | A++ | | A+++ (3) | | | | |
| Domestic hot water heating | General | Declared load profile | | L | XL | L | XL | L | XL | XL | |
| | | Average climate | η _{wh} (water heating efficiency) | % | | 104 | | 111 | | 104 | |
| | | Water heating energy efficiency class | | | | | A | | | | |
| Indoor Unit | | | | EAVH | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) | |
| Casing | Colour | White + Black | | | | | | | | | |
| | Material | Resin / Sheet metal | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | | |
| Weight | Unit | | kg | 109 | 118 | 109 | 118 | 109 | 118 | | |
| Tank | Water volume | | l | 180 | 230 | 180 | 230 | 180 | 230 | | |
| | Maximum water temperature | | °C | 70 | | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | | |
| | Corrosion protection | | | Pickling | | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | 5~30 | | | | | |
| | | Water side | Min.~Max. | °C | | 15~60 | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | 5~35 | | | | | |
| | | Water side | Max. | °C | | 60 | | | | | |
| Sound power level | Nom. | | dBA | 44 | | | | | | | |
| Sound pressure level | Nom. | | dBA | 30 | | | | | | | |
| Outdoor Unit | | | | EPGA | 11DV | 14DV | 16DV | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1440x1160x380 | | | | | | | |
| Weight | Unit | | kg | 143 | | | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10~43 | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -28~35 | | | | | | | |
| Refrigerant | Type | | | R-32 | | | | | | | |
| | GWP | | | 675.0 | | | | | | | |
| | Charge | | kg | 3.50 | | | | | | | |
| | Charge | | TCO ₂ /Eq | 2.36 | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | | | 66 | | | |
| | | Cooling | Nom. | dBA | 68 | | | | 52 | | |
| | Cooling | Nom. | dBA | 48 | | | | 49 | | | |
| | | Nom. | dBA | 55 | | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | V3/1N~/50/230 | | | | | | | | |
| Current | Recommended fuses | | A | 32 | | | | | | | |


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 reversible models

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



| Efficiency data | | | | EAVX + EPGA | 16S18D6V(G)/ D9W(G) + 11DV | 16S23D6V(G)/ D9W(G) + 11DV | 16S18D6V(G)/ D9W(G) + 14DV | 16S23D6V(G)/ D9W(G) + 14DV | 16S18D6V(G)/ D9W(G) + 16DV | 16S23D6V(G)/ D9W(G) + 16DV |
|----------------------------|-----------------------------------|---------------------------------------|--|-----------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Heating capacity | Nom. | | | | 11.1 (1) / 11.3 (2) | | 14.5 (1) / 14.5 (2) | | 16.5 (1) / 15.6 (2) | |
| Power input | Heating | Nom. | | | 2.16 (1) / 2.91 (2) | | 2.91 (1) / 3.96 (2) | | 3.45 (1) / 4.21 (2) | |
| Cooling capacity | Nom. | | | | 10.5 (1) / 10.7 (2) | | 11.1 (1) / 11.9 (2) | | 13.5 (1) / 11.9 (2) | |
| Power input | Cooling | Nom. | | | 2.21 (1) / 3.30 (2) | | 2.72 (1) / 3.97 (2) | | 3.42 (1) / 3.97 (2) | |
| COP | | | | | 5.15 (1) / 3.88 (2) | | 4.99 (1) / 3.65 (2) | | 4.78 (1) / 3.71 (2) | |
| EER | | | | | 4.75 (1) / 3.23 (2) | | 4.09 (1) / 2.99 (2) | | 3.94 (1) / 2.99 (2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.32 | | 3.37 | | 3.43 | |
| | | | ηs (Seasonal space heating efficiency) | % | 130 | | 132 | | 134 | |
| | Average climate water outlet 35°C | General | SCOP | | 4.44 | | 4.51 | | 4.61 | |
| | | | ηs (Seasonal space heating efficiency) | % | 175 | | 178 | | 182 | |
| | | | | Seasonal space heating eff. class | A++ | | | A+++ (3) | | |
| Domestic hot water heating | General | Declared load profile | | | L | XL | L | XL | L | XL |
| | | Average climate | gwh (water heating efficiency) | % | 104 | 111 | 104 | 111 | 104 | 111 |
| | | Water heating energy efficiency class | | A | | | | | | |
| Indoor Unit | | | | EAVX | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) | 16S18D6V(G)/ D9W(G) | 16S23D6V(G)/ D9W(G) |
| Casing | Colour | White + Black | | | | | | | | |
| | Material | Resin / Sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | |
| | Weight | Unit | kg | 109 | 118 | 109 | 118 | 109 | 118 | |
| Tank | Water volume | Unit | l | 180 | 230 | 180 | 230 | 180 | 230 | |
| | Maximum water temperature | Unit | °C | 70 | | | | | | |
| | Maximum water pressure | Unit | bar | 10 | | | | | | |
| | Corrosion protection | Pickling | | | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | | | | |
| | | Water side | Min.~Max. | °C | | | | | | |
| | Cooling | Ambient | Min.~Max. | °CDB | | | | | | |
| | | Water side | Min.~Max. | °C | | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | | | |
| | | Water side | Max. | °C | | | | | | |
| Sound power level | Nom. | | | dBA | | | | | | |
| Sound pressure level | Nom. | | | dBA | | | | | | |
| Outdoor Unit | | | | EPGA | 11DV | 14DV | 16DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1440x1160x380 | | | | | | |
| Weight | Unit | | kg | 143 | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | |
| | Type | Hermetically sealed scroll compressor | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | | | | | |
| Refrigerant | Type | R-32 | | | | | | | | |
| | GWP | 675.0 | | | | | | | | |
| | Charge | kg | 3.50 | | | | | | | |
| | Charge | TCO ₂ Eq | 2.36 | | | | | | | |
| | Control | Expansion valve | | | | | | | | |
| Sound power level | Heating | Nom. | | 64 | | | 66 | | | |
| | Cooling | Nom. | | 68 | | | 52 | | | |
| Sound pressure level | Heating | Nom. | | 48 | 49 | | | 52 | | |
| | Cooling | Nom. | | 55 | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | | | V3/1N~/50/230 | | | | | | |
| Current | Recommended fuses | | | A | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 Bi-Zone models

Floor standing integrated with **two different temperature zones monitoring**

- › Integrated stainless steel domestic hot water tank of 180 or 230L
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint of 595 x 600 mm
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C

















011-1W0319 -> 324

up to **A+++** **A** **R-32**
(3)

| Efficiency data | | | | EAVZ + EPGA | | 16S18D6V/D9W + 11DV | | 16S23D6V/D9W + 11DV | | 16S18D6V/D9W + 14DV | | 16S23D6V/D9W + 14DV | | 16S18D6V/D9W + 16DV | | 16S23D6V/D9W + 16DV | | |
|----------------------------|-----------------------------------|---|---|---------------------|---------------|---------------------------------------|---------------|---------------------------------------|---------------|---------------------------------------|---------------|---------------------|--|---------------------|--|---------------------|--|--|
| Heating capacity | Nom. | | kW | 11.1 (1) / 11.3 (2) | | 14.5 (1) / 14.5 (2) | | 16.5 (1) / 15.6 (2) | | | | | | | | | | |
| Power input | Heating | Nom. | kW | 2.16 (1) / 2.91 (2) | | 2.91 (1) / 3.96 (2) | | 3.45 (1) / 4.21 (2) | | | | | | | | | | |
| COP | | | | 5.15 (1) / 3.88 (2) | | 4.99 (1) / 3.65 (2) | | 4.78 (1) / 3.71 (2) | | | | | | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.29 | | 3.34 | | 3.41 | | | | | | | | | | |
| | | | η _{sp} (Seasonal space heating efficiency) | 129 | | 130 | | 133 | | | | | | | | | | |
| | | Seasonal space heating eff. class | | | A++ | | | | | | | | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 4.38 | | 4.45 | | 4.56 | | | | | | | | | | |
| | | η _{sp} (Seasonal space heating efficiency) | 172 | | 175 | | 179 | | | | | | | | | | | |
| | | Seasonal space heating eff. class | A++ | | A+++ (3) | | | | | | | | | | | | | |
| Domestic hot water heating | General | Declared load profile | | L | XL | L | XL | L | XL | L | XL | | | | | | | |
| | Average climate | η _{wh} (water heating efficiency) | % | 104 | 111 | 104 | 111 | 104 | 111 | 104 | 111 | | | | | | | |
| | | Water heating energy efficiency class | | A | | A | | A | | A | | | | | | | | |
| Indoor Unit | | | | EAVZ | | 16S18D6V/D9W | | 16S23D6V/D9W | | 16S18D6V/D9W | | 16S23D6V/D9W | | 16S18D6V/D9W | | 16S23D6V/D9W | | |
| Casing | Colour | | | White + Black | | | | | | | | | | | | | | |
| | Material | | | Resin / Sheet metal | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | 1,650x595x625 | 1,850x595x625 | | | | | | | |
| Weight | Unit | | kg | 120 | 128 | 120 | 128 | 120 | 128 | 120 | 128 | | | | | | | |
| Tank | Water volume | | l | 180 | 230 | 180 | 230 | 180 | 230 | 180 | 230 | | | | | | | |
| | Maximum water temperature | | °C | 70 | | 70 | | 70 | | 70 | | | | | | | | |
| | Maximum water pressure | | bar | 10 | | 10 | | 10 | | 10 | | | | | | | | |
| | Corrosion protection | | | Pickling | | Pickling | | Pickling | | Pickling | | | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | 5~30 | | 5~30 | | 5~30 | | | | | | | | |
| | | Water side | Min.~Max. | °C | | 15~60 | | 15~60 | | 15~60 | | | | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | 5~35 | | 5~35 | | 5~35 | | | | | | | | |
| | | Water side | Max. | °C | | 60 | | 60 | | 60 | | | | | | | | |
| Sound power level | Nom. | | dBA | 44 | | 44 | | 44 | | 44 | | | | | | | | |
| Sound pressure level | Nom. | | dBA | 30 | | 30 | | 30 | | 30 | | | | | | | | |
| Outdoor Unit | | | | EPGA | | 11DV | | 14DV | | 16DV | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | 1440x1160x380 | | 1440x1160x380 | | 1440x1160x380 | | | | | | | | |
| Weight | Unit | | kg | | | 143 | | 143 | | 143 | | | | | | | | |
| Compressor | Quantity | | | | | 1 | | 1 | | 1 | | | | | | | | |
| | Type | | | | | Hermetically sealed scroll compressor | | Hermetically sealed scroll compressor | | Hermetically sealed scroll compressor | | | | | | | | |
| Operation range | Cooling | | Min.~Max. | °CDB | | 10~43 | | 10~43 | | 10~43 | | | | | | | | |
| | Domestic hot water | | Min.~Max. | °CDB | | -28~35 | | -28~35 | | -28~35 | | | | | | | | |
| Refrigerant | Type | | | | | R-32 | | R-32 | | R-32 | | | | | | | | |
| | GWP | | | | | 675.0 | | 675.0 | | 675.0 | | | | | | | | |
| | Charge | | kg | | | 3.50 | | 3.50 | | 3.50 | | | | | | | | |
| | Charge | | TCO ₂ Eq | | | 2.36 | | 2.36 | | 2.36 | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | 64 | | 64 | | 64 | | 66 | | 66 | | 66 | | |
| | | | dBA | | | | | | | | | | | | | | | |
| | Cooling | Nom. | dBA | | | | | | | | | | | | | | | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 48 | | 48 | | 48 | | 52 | | 52 | | 52 | | |
| | Cooling | Nom. | dBA | | | | | | | | | | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | | | V3/1N~/50/230 | | V3/1N~/50/230 | | V3/1N~/50/230 | | | | | | | | |
| Current | Recommended fuses | | A | | | 32 | | 32 | | 32 | | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| | Type | Material name | Daikin Altherma 3 H F |
|--------------|---|--|-------------------------------|
| Controls |  | Remote user interface | BRC1HHDK/S/W ● |
| |  | LAN Adapter + PV Solar connection | BRP069A61 ● |
| |  | LAN only | BRP069A62 ● |
| |  | Room thermostat (wired) | EKRTWA ● |
| |  | Room thermostat (wireless) | EKRTR1 ● |
| |  | External sensor | EKRTETS ● |
| |  | DCOM gateway | DCOM-LT/IO |
| |  | DCOM gateway | DCOM-LT/MB |
| Adapter |  | Demand PCB | EKRP1AHTA ● |
| |  | Digital I/O PCB | EKRP1HBAA ● |
| Installation |  | Bi-Zone kit (watts kit) | BZKA7V3 ● (excluding EHVZ) |
| | | Third party tank it for tank with sensor pocket | EKHY3PART |
| | | Third party tank kit for tank with built-in thermostat | EKHY3PART2 |
| Sensors |  | Remote indoor sensor | KRCS01-1 ● |
| |  | Remote outdoor sensor | EKRSCA-1 ● |
| Others |  | PC USB Cable | EKPCAB4 ● |
| | | Conversion kit | EKHBCONV ● |
| | | Universal centralized controller | EKHVCONV2 ● |
| | | Freeze protection valve | AFVALVE1 ● |
| | | Heat pump convector + valve kit | FWXV-A + EKVKHPC ● |



Daikin Altherma 3 H W

wall mounted unit

Why choose Daikin wall mounted unit?

The Daikin Altherma 3 H W split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water.

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required.
- › The unit's sleek design blends in with other household appliances.
- › Combine with a stainless steel or ECH₂O thermal store



Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on a USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.

Multiple tank solutions, infinite possibilities

ECH₂O Thermal stores (EKHWP-(P)B)

Connect your Daikin Altherma 3 wall mounted unit with a thermal store and take advantage of the energy of the sun.

Stainless steel tank (EKHWS(U)-D)

Connect your Daikin Altherma 3 wall mounted unit with a stainless steel tank to achieve efficient domestic hot water heating production.

Flexibility in providing domestic hot water

Heating only models - EABH-D

The heating only Daikin Altherma 3 models provide domestic hot water and space heating in an efficient way.



Reversible models - EABX-D

Additionally to its core function, Daikin Altherma 3 can provide cooling during hot season.


This cooling function is working via emitters such as an underfloor system or thanks to a fancoil.



Daikin Altherma 3 heating only models

Wall mounted **heating only** air-to-water heat pump ideal for low energy houses

- › Combine with a stainless steel tank or ECH₂O thermal store to provide domestic hot water
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C



| Efficiency data | | | | EABH + EPGA | 16D6V/D9W + 11DV | 16D6V/D9W + 14DV | 16D6V/D9W + 16DV | | | |
|--|-----------------------------------|---------------------|--|-------------|---------------------|---------------------|---------------------|-------|-------|-------|
| Heating capacity | Nom. | | | kW | 11.1 (1) / 11.3 (2) | 14.5 (1) / 14.5 (2) | 16.5 (1) / 15.6 (2) | | | |
| Power input | Heating | Nom. | | kW | 2.16 (1) / 2.91 (2) | 2.91 (1) / 3.96 (2) | 3.45 (1) / 4.21 (2) | | | |
| COP | | | | | 5.15 (1) / 3.88 (2) | 4.99 (1) / 3.65 (2) | 4.78 (1) / 3.71 (2) | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.29 | 3.34 | 3.41 | | | |
| | | | ηs (Seasonal space heating efficiency) | % | 129 | 130 | 133 | | | |
| | Seasonal space heating eff. class | | | | A++ | | | | | |
| | Average climate water outlet 35°C | General | SCOP | | 4.38 | 4.45 | 4.56 | | | |
| ηs (Seasonal space heating efficiency) | | | % | 172 | 175 | 179 | | | | |
| Seasonal space heating eff. class | | | | A+++ (3) | | | | | | |
| Indoor Unit | | | | EABH | 16D6V | 16D9W | 16D6V | 16D9W | 16D6V | 16D9W |
| Casing | Colour | White + Black | | | | | | | | |
| | Material | Resin, sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | |
| Weight | Unit | kg | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | | | |
| Sound power level | Nom. | dBA | | | | | | | | |
| Sound pressure level | Nom. | dBA | | | | | | | | |
| Outdoor Unit | | | | EPGA | 11DV | 14DV | 16DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | |
| Weight | Unit | kg | | | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | | | | | |
| Refrigerant | Type | R-32 | | | | | | | | |
| | GWP | 675.0 | | | | | | | | |
| | Charge | kg | | | | | | | | |
| | Charge | TCO ₂ Eq | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | | 64 | 66 | | | | |
| | Cooling | Nom. | dBA | | 68 | | 66 | | | |
| Sound pressure level | Heating | Nom. | dBA | | 48 | 52 | | | | |
| | Cooling | Nom. | dBA | | 49 | | 52 | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | | | V3/1N~/50/230 | | | | |
| Current | Recommended fuses | A | | | | 32 | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
 (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Daikin Altherma 3 reversible models

Wall mounted **reversible** air-to-water heat pump ideal for low energy houses

- › Combine with a stainless steel tank or ECH₂O thermal store to provide domestic hot water
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › Integrated back-up heater choice of 6 or 9 kW
- › Outdoor unit extracts heat from the outdoor air, even at -28°C


















011-1W0319 -> 324

| Efficiency data | | | | EABX + EPGA | 16D6V/D9W + 11DV | 16D6V/D9W + 14DV | 16D6V/D9W + 16DV | | | |
|-----------------------------------|-----------------------------------|---------------------------------------|--|-------------|------------------|------------------|------------------|-------|-------|-------|
| Heating capacity | Nom. | | | kW | | | | | | |
| Power input | Heating | Nom. | | kW | | | | | | |
| Cooling capacity | Nom. | | | kW | | | | | | |
| Power input | Cooling | Nom. | | kW | | | | | | |
| COP | | | | | | | | | | |
| EER | | | | | | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.32 | 3.37 | 3.43 | | | | |
| | | | ηs (Seasonal space heating efficiency) | 130 | 132 | 134 | | | | |
| | Average climate water outlet 35°C | General | SCOP | 4.44 | 4.51 | 4.61 | | | | |
| | | | ηs (Seasonal space heating efficiency) | 175 | 178 | 182 | | | | |
| Seasonal space heating eff. class | | | | A++ | | A+++ (3) | | | | |
| Indoor Unit | | | | EABX | 16D6V | 16D9W | 16D6V | 16D9W | 16D6V | 16D9W |
| Casing | Colour | White + Black | | | | | | | | |
| | Material | Resin, sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | |
| Weight | Unit | kg | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | | | |
| Sound power level | Nom. | dBA | | | | | | | | |
| Sound pressure level | Nom. | dBA | | | | | | | | |
| Outdoor Unit | | | | EPGA | 11DV | 14DV | 16DV | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | |
| Weight | Unit | kg | | | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | |
| | Type | Hermetically sealed scroll compressor | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | | | | | |
| Refrigerant | Type | R-32 | | | | | | | | |
| | GWP | 675.0 | | | | | | | | |
| | Charge | kg | | | | | | | | |
| | Charge | TCO ₂ Eq | | | | | | | | |
| Sound power level | Heating | Nom. | 64 | | 66 | | | | | |
| | Cooling | Nom. | 68 | | 52 | | | | | |
| Sound pressure level | Heating | Nom. | 48 | | 52 | | | | | |
| | Cooling | Nom. | 49 | | 55 | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | | | | | | | |
| Current | Recommended fuses | A | | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| | Type | Material name | Daikin Altherma 3 H W | |
|--------------|---|--|-----------------------|-------------------------------------|
| Controls |  | Remote user interface | BRC1HHDK/S/W | <input checked="" type="checkbox"/> |
| |  | LAN Adapter + PV Solar connection | BRP069A61 | <input checked="" type="checkbox"/> |
| |  | LAN only | BRP069A62 | <input checked="" type="checkbox"/> |
| |  | Room thermostat (wired) | EKRTWA | <input checked="" type="checkbox"/> |
| |  | Room thermostat (wireless) | EKRTR1 | <input checked="" type="checkbox"/> |
| |  | External sensor | EKRTETS | <input checked="" type="checkbox"/> |
| |  | DCOM gateway | DCOM-LT/IO | <input checked="" type="checkbox"/> |
| |  | DCOM gateway | DCOM-LT/MB | <input checked="" type="checkbox"/> |
| Adapter |  | Demand PCB | EKRP1AHTA | <input checked="" type="checkbox"/> |
| |  | Digital I/O PCB | EKRP1HBAA | <input checked="" type="checkbox"/> |
| Installation |  | Bi-Zone kit (watts kit) | BZKA7V3 | <input checked="" type="checkbox"/> |
| | | Third party tank it for tank with sensor pocket | EKHY3PART | <input checked="" type="checkbox"/> |
| | | Third party tank kit for tank with built-in thermostat | EKHY3PART2 | <input checked="" type="checkbox"/> |
| Sensors |  | Remote indoor sensor | KRCS01-1 | <input checked="" type="checkbox"/> |
| |  | Remote outdoor sensor | EKRSCA-1 | <input checked="" type="checkbox"/> |
| Others |  | PC USB Cable | EKPCCAB4 | <input checked="" type="checkbox"/> |
| | | Conversion kit | EKHBCONV EKHVCONV2 | <input checked="" type="checkbox"/> |
| | | Universal centralized controller | EKCC8-W | <input checked="" type="checkbox"/> |
| | | Freeze protection valve | AFVALVE1 | <input checked="" type="checkbox"/> |
| | | Heat pump convector + valve kit | FWXV-A + EKVKHPC | <input checked="" type="checkbox"/> |

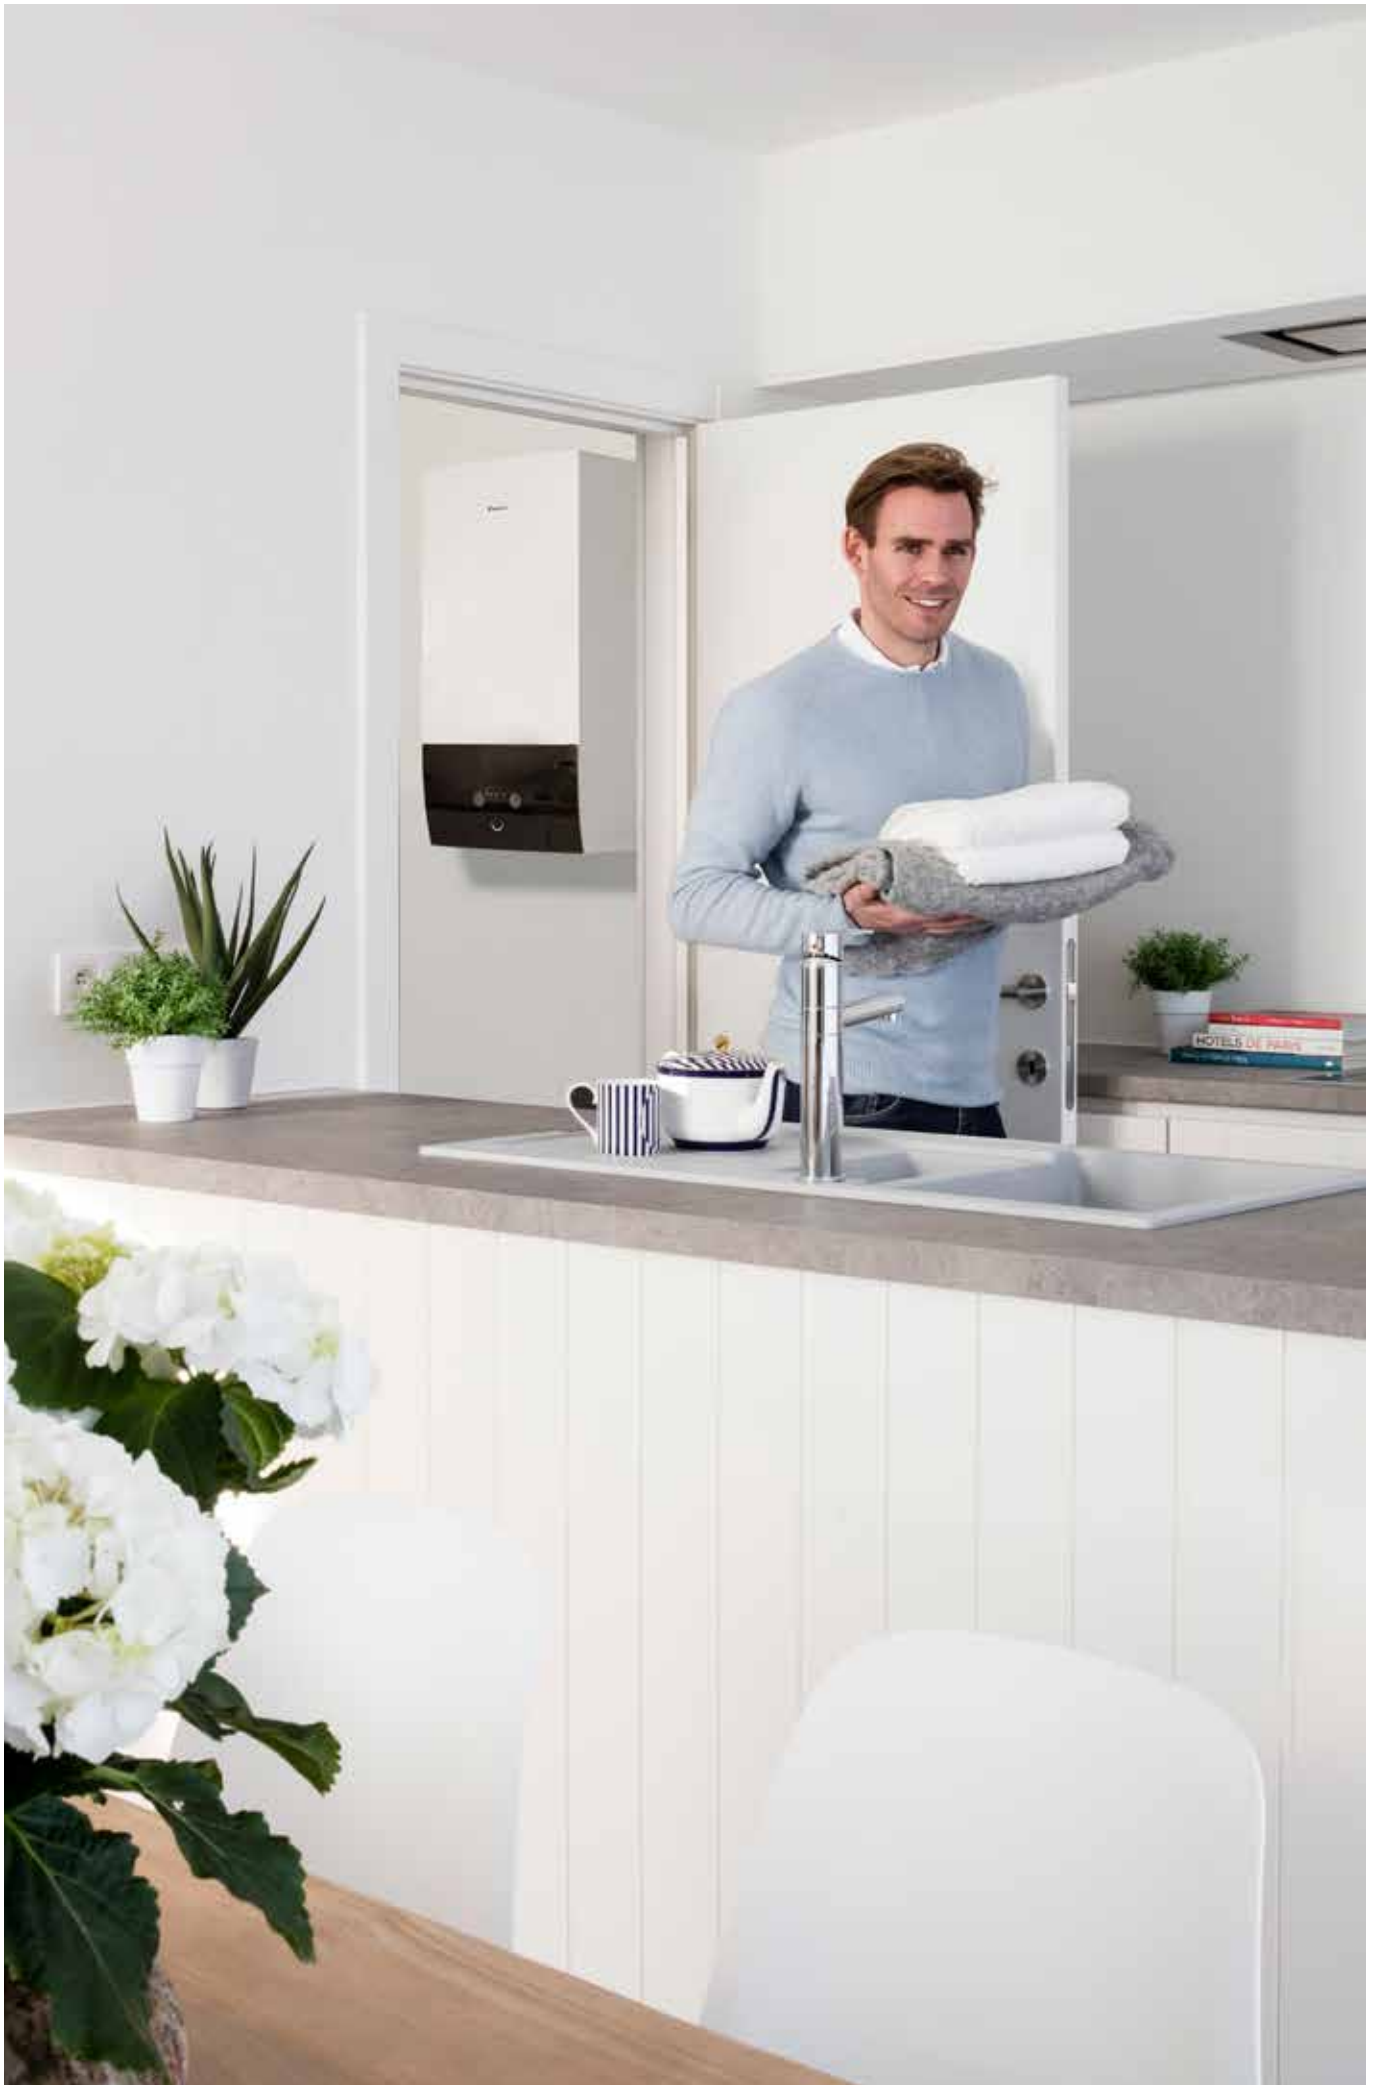

R-410A


Daikin Altherma R F low temperature split floor standing unit with integrated domestic hot water tank



The Daikin Altherma floor standing unit heating delivers domestic hot water and cooling for new builds and low-energy houses.

All-in-one system to save installation space and time

- › A combined stainless steel domestic hot water tank and heat pump ensures a faster installation compared to traditional systems
- › Inclusion of all hydraulic components means no third-party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Small installation footprint with space reduced by more than 30%
- › Integrated Bi-Zone kit allows temperature monitoring for two zones: connect underfloor heating to radiators to optimise efficiency.

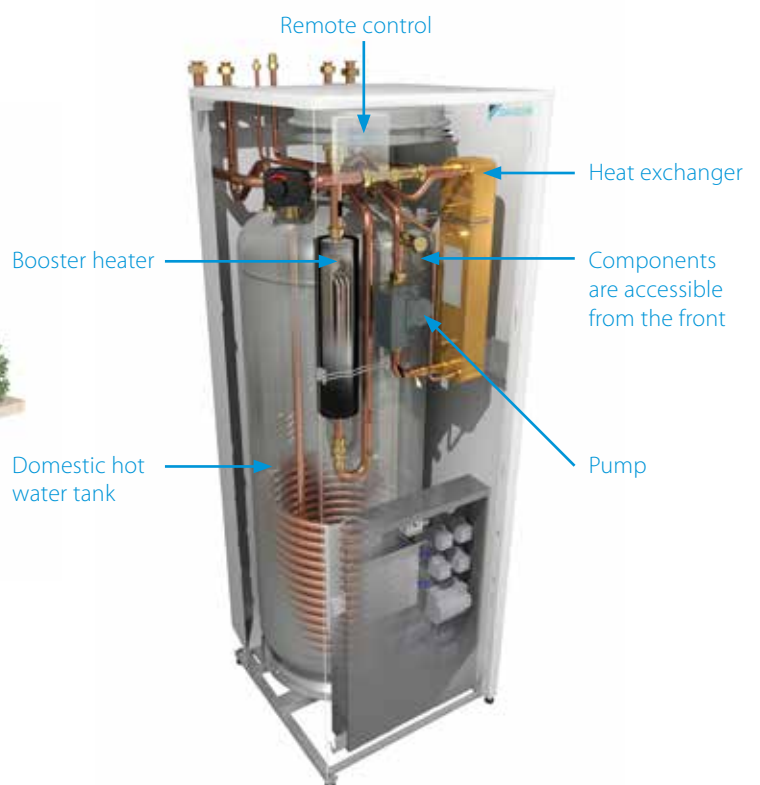




All-in-one design reduces the installation footprint and height

Compared to the traditional split version for a wall mounted indoor unit and separate domestic hot water tank, the integrated indoor unit greatly reduces the installation space required.

Smaller footprint: with a width of only 600 mm and a depth of 728 mm, the integrated indoor unit has a similar footprint when compared to other household appliances. For installation projects, almost no side clearance is necessary as the piping is located at the top of the unit. This results in an installation footprint of only 0.45 m².

Low installation height: both the 180l and 260l version come with a height of 173 cm. The required installation height is less than 2 m.

The compactness of the integrated indoor unit is emphasised by its sleek design and modern look, easily blending in with other household appliances.

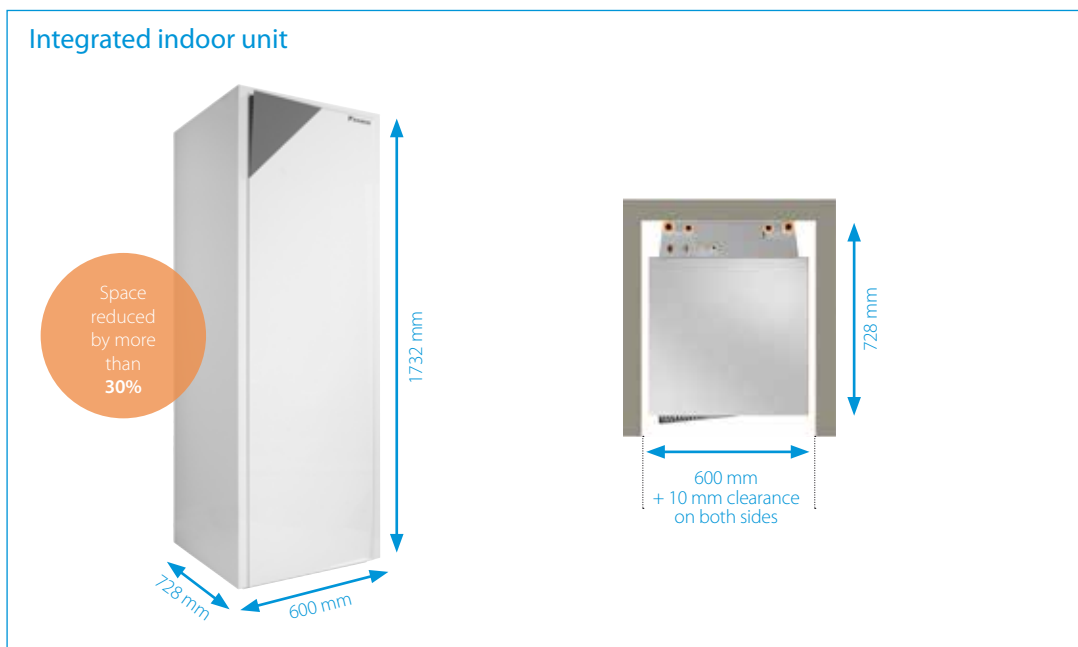




Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVH + ERLQ-C | | | | | | | | | | | | | | | |
|----------------------------|-----------------------------------|---------|--|----------------------|---------------------|----------------------------|---|--|---|---|---|---|---|---|---|----------------------------|------------|----------------------------|--|
| | | | | 04S18CB3V+004CV3 | | 08S26CB9W/08S18CB3V+006CV3 | | 08S18CB3V/08S26CB9W+008CV3 | | 11S18CB3V/11S26CB9W+011CV3 | | 16S18CB3V/16S26CB9W+014CV3 | | 16S18CB3V/16S26CB9W+011CW1 | | 11S18CB3V/11S26CB9W+014CW1 | | 16S18CB3V/16S26CB9W+016CW1 | |
| Heating capacity | Nom. | kW | | 4.40 (1) / 4.03 (2) | 6.00 (1) / 5.67 (2) | 7.40 (1) / 6.89 (2) | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | | | | |
| Power input | Heating | Nom. | kW | 0.870 (1) / 1.13 (2) | 1.27 (1) / 1.59 (2) | 1.66 (1) / 2.01 (2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | | | | |
| COP | | | | 5.04 (1) / 3.58 (2) | 4.74 (1) / 3.56 (2) | 4.45 (1) / 3.42 (2) | 4.60 (1) / 2.75 (3) / 3.55 (2) / 2.10 (4) | 4.30 (1) / 2.65 (3) / 3.32 (2) / 2.08, (4) | 4.25 (1) / 2.64 (3) / 3.26 (2) / 2.09 (4) | 4.60 (1) / 2.75 (3) / 3.55 (2) / 2.10 (4) | 4.30 (1) / 2.65 (3) / 3.32 (2) / 2.08 (4) | 4.25 (1) / 2.64 (3) / 3.26 (2) / 2.09 (4) | 4.60 (1) / 2.75 (3) / 3.55 (2) / 2.10 (4) | 4.30 (1) / 2.65 (3) / 3.32 (2) / 2.08 (4) | 4.25 (1) / 2.64 (3) / 3.26 (2) / 2.09 (4) | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class | 3.20 125 | 3.22 126 | 3.20 125 | 3.09 120 | 3.16 123 | 3.06 119 | 3.09 120 | 3.16 123 | 3.06 119 | 3.09 120 | 3.16 123 | 3.06 119 | | | | |
| | | General | SCOP ηs (Seasonal space heating efficiency) Seasonal space heating eff. class | 4.52 178 | 4.29 169 | 4.34 171 | 3.98 156 | 3.90 153 | 3.80 149 | 3.98 156 | 3.90 153 | 3.80 149 | 3.98 156 | 3.90 153 | 3.80 149 | | | | |
| Domestic hot water heating | Average climate | General | Declared load profile ηwh (water heating efficiency) Water heating energy efficiency class | L 95.0 | XL 90.0 | L 86.4 | XL 90.0 | L 87.4 | XL 97.7 | L 87.4 | XL 97.7 | L 87.4 | XL 97.7 | L 87.4 | XL 97.7 | L 87.4 | XL 97.7 | | |
| | | General | Declared load profile ηwh (water heating efficiency) Water heating energy efficiency class | A | | | | | | | | | | | | | | | |

| Indoor Unit | | | EHVH | | | | | | | | | | | | | | | |
|----------------------|---------------------------|----------------------|-----------------------|-----|---------------------|-----|---------------------|-----|---------------------|-----|---------------------|-----|---------------------|-----|---------------------|-----|---------------------|-----|
| | | | 04S18CB3V | | 08S26CB9W/08S18CB3V | | 08S18CB3V/08S26CB9W | | 11S18CB3V/11S26CB9W | | 16S18CB3V/16S26CB9W | | 16S18CB3V/16S26CB9W | | 11S18CB3V/11S26CB9W | | 16S18CB3V/16S26CB9W | |
| Casing | Colour | Material | White | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | Precoated sheet metal | | | | | | | | | | | | | | | |
| Weight | Unit | kg | 1,732x600x728 | | | | | | | | | | | | | | | |
| Tank | Water volume | l | 116 | 127 | 117 | 127 | 117 | 126 | 118 | 128 | 118 | 128 | 117 | 126 | 118 | 128 | 118 | 128 |
| | Maximum water temperature | °C | 65 | | | | | | | | | | | | | | | |
| Operation range | Heating | Water side Min.~Max. | 10 | | | | | | | | | | | | | | | |
| | Domestic hot water | Water side Min.~Max. | Anode | | | | | | | | | | | | | | | |
| Sound power level | Nom. | dBA | 25~60 | | | | | | | | | | | | | | | |
| | Nom. | dBA | 15~55.0 | | | | | | | | | | | | | | | |
| Sound pressure level | Nom. | dBA | 25~60 / 60 | | | | | | | | | | | | | | | |
| | Nom. | dBA | 42.0 | | | | | | | | | | | | | | | |
| Sound pressure level | Nom. | dBA | 28.0 | | | | | | | | | | | | | | | |
| | Nom. | dBA | 44.0 | | | | | | | | | | | | | | | |
| Sound pressure level | Nom. | dBA | 30.0 | | | | | | | | | | | | | | | |
| | Nom. | dBA | 44.0 | | | | | | | | | | | | | | | |

| Outdoor Unit | | | ERLQ-C | | | | | | | | | | | | | | | | | |
|------------------------------|---------------------|--------------------|--------------------------------------|--|--------|--|--------|--|--------|--|--------|--|--------|--|--------|--|--------|--|--------|--|
| | | | 004CV3 | | 006CV3 | | 008CV3 | | 011CV3 | | 014CV3 | | 016CV3 | | 011CW1 | | 014CW1 | | 016CW1 | |
| Dimensions | Unit | HeightxWidthxDepth | 735x832x307 | | | | | | | | | | | | | | | | | |
| Weight | Unit | kg | 54 | | | | | | | | | | | | | | | | | |
| Compressor | Quantity | | 1 | | | | | | | | | | | | | | | | | |
| | Type | | Hermetically sealed swing compressor | | | | | | | | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | 10.0~43.0 | | | | | | | | | | | | | | | | | |
| | Domestic hot water | Min.~Max. | -25~35 | | | | | | | | | | | | | | | | | |
| Refrigerant | Type | | R-410A | | | | | | | | | | | | | | | | | |
| | GWP | | 2,087.5 | | | | | | | | | | | | | | | | | |
| Charge | kg | | 3.4 | | | | | | | | | | | | | | | | | |
| | TCO ₂ Eq | | 7.1 | | | | | | | | | | | | | | | | | |
| Sound power level | Heating | Nom. | 2,087.5 | | | | | | | | | | | | | | | | | |
| | Cooling | Nom. | 61 | | | | | | | | | | | | | | | | | |
| Sound pressure level | Heating | Nom. | 62 | | | | | | | | | | | | | | | | | |
| | Cooling | Nom. | 64 | | | | | | | | | | | | | | | | | |
| Power supply | Heating | Nom. | 66 | | | | | | | | | | | | | | | | | |
| | Cooling | Nom. | 69 | | | | | | | | | | | | | | | | | |
| Current | Heating | Nom. | 52 | | | | | | | | | | | | | | | | | |
| | Cooling | Nom. | 54 | | | | | | | | | | | | | | | | | |
| Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | | | | | | | | | | | | |
| | Recommended fuses | A | W1/3N~/50/400 | | | | | | | | | | | | | | | | | |
| Recommended fuses | | A | 16 | | | | | | | | | | | | | | | | | |
| | | A | 20 | | | | | | | | | | | | | | | | | |
| Recommended fuses | | A | 40 | | | | | | | | | | | | | | | | | |
| | | A | 20 | | | | | | | | | | | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- > Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- > Perfect fit for new built as well as for low energy houses
- > Best seasonal efficiencies, providing the highest savings on running costs
- > Flexible configuration with respect to heat emitters
- > Outdoor unit extracts heat from the outdoor air, even at -20°C
- > Online controller (optional)
- > Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVH + ERHQ-B | | 11S26CB9W / 11S18CB3V + 011BV3 | | 16S26CB9W / 16S18CB3V + 014BV3 | | 16S26CB9W / 16S18CB3V + 016BV3 | | 11S26CB9W / 11S18CB3V + 011BW1 | | 16S26CB9W / 16S18CB3V + 014BW17 | | 16S18CB3V / 16S26CB9W + 016BW1 | | | |
|--|-----------------------------------|--|--|------------------|-----|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|--------------------------------|-----|---------------------------------|---|--------------------------------|---|------|--|
| Heating capacity | Nom. | | kW | 11.2(1)/ 10.3(2) | | 14.0(1)/ 13.1(2) | | 16.0(1)/ 15.2(2) | | 11.3(1)/ 11.0(2) | | 14.5(1)/ 13.6(2) | | 16.1(1)/ 15.1(2) | | | | | |
| Power input | Heating | Nom. | kW | 2.55(1)/ 3.17(2) | | 3.26(1)/ 4.04(2) | | 3.92(1)/ 4.75(2) | | 2.63(1)/ 3.24(2) | | 3.42(1)/ 4.21(2) | | 3.82(1)/ 4.69(2) | | | | | |
| COP | | | | 4.39(1)/ 3.25(2) | | 4.29(1)/ 3.24(2) | | 4.08(1)/ 3.20(2) | | 4.30(1)/ 3.39(2) | | 4.24(1)/ 3.22(2) | | 4.20(1)/ 3.22(2) | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | | 2.82 | | 2.92 | | 2.90 | | 2.86 | | 2.96 | | | | | |
| | | | ηs (Seasonal space heating efficiency) | 112 | | 110 | | 114 | | 113 | | 111 | | 115 | | | | | |
| | Seasonal space heating eff. class | | | A+ | | | | | | | | | | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 2.99 | | 3.23 | | 3.29 | | 3.08 | | 3.34 | | | | | | | |
| ηs (Seasonal space heating efficiency) | | | 117 | | 126 | | 129 | | 120 | | 131 | | 130 | | | | | | |
| Seasonal space heating eff. class | | | A | | A+ | | A | | A+ | | | | | | | | | | |
| Domestic hot water heating | General climate | Declared load profile | | XL | L | XL | L | XL | L | XL | L | XL | L | XL | L | XL | L | | |
| | | Average ηwh (water heating efficiency) | | 95.3 | | 90.5 | | 95.3 | | 90.5 | | 87.3 | | 84.3 | | 87.3 | | 84.3 | |
| | | Water heating energy efficiency class | | A | | | | | | | | | | | | | | | |

| Indoor Unit | | | | EHVH | | 11S26CB9W / 11S18CB3V | | 16S26CB9W / 16S18CB3V | | 16S26CB9W / 16S18CB3V | | 11S26CB9W / 11S18CB3V | | 16S26CB9W / 16S18CB3V | | 16S18CB3V / 16S26CB9W | |
|----------------------|---------------------------|-----------------------|---------------|------------|-----|-----------------------|-----|-----------------------|-----|-----------------------|-----|-----------------------|-----|-----------------------|-----|-----------------------|-----|
| Casing | Colour | White | | | | | | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | | | | | | | | |
| | | | 1,732x600x728 | | | | | | | | | | | | | | |
| Weight | Unit | | kg | 126 | 117 | 128 | 118 | 128 | 118 | 126 | 117 | 128 | 118 | 118 | 118 | 128 | |
| Tank | Water volume | | l | 260 | 180 | 260 | 180 | 260 | 180 | 260 | 180 | 260 | 180 | 260 | 180 | 180 | 260 |
| | Maximum water temperature | | °C | 65 | | | | | | | | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | | | | | | | | |
| | Corrosion protection | | | Anode | | | | | | | | | | | | | |
| Operation range | Heating | Water side Min.~Max. | °C | 15 ~55.0 | | | | | | | | | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | 25~60 / 60 | | | | | | | | | | | | | |
| Sound power level | Nom. | | dBA | 42.0 | | 44.0 | | 42.0 | | 44.0 | | | | | | | |
| Sound pressure level | Nom. | | dBA | 28.0 | | 30.0 | | 28.0 | | 30.0 | | | | | | | |

| Outdoor Unit | | | | ERHQ-B | | 011BV3 | | 014BV3 | | 016BV3 | | 011BW1 | | 014BW17 | | 016BW1 | |
|----------------------|------------------------------|--------------------|---------------------|---------------------------------------|--|--------|--|--------|--|---------------|--|--------|--|---------|--|--------|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | | | | 1,345x900x320 | | | | | | | |
| Weight | Unit | | kg | 102 | | | | | | 108 | | | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | | | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | | | | | |
| | Charge | | kg | 2.7 | | | | | | 3.0 | | | | | | | |
| | Charge | | TCO ₂ Eq | 5.6 | | | | | | 6.3 | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | 66 | | 64 | | 66 | | | | | | | |
| | Cooling | Nom. | dBA | 64 | | 66 | | 69 | | 64 | | 66 | | 69 | | | |
| Sound pressure level | Heating | Nom. | dBA | 49 | | 51 | | 53 | | 51 | | 52 | | 54 | | | |
| | Cooling | Nom. | dBA | 50 | | 52 | | 54 | | 50 | | 52 | | 54 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | W1/3N~/50/400 | | | | | | | |
| Current | Recommended fuses | | A | 32 | | | | | | 20 | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVX + ERLQ-C | | | | | | | | | | | |
|----------------------------|-----------------------------------|---------------------------------------|-----------------------|---------------------|--------------------------------|--------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|------|------|------|
| | | | | 04S18 CB3V + 004CV3 | 08S18CB3V / 08S26CB9W + 006CV3 | 08S18CB3V / 08S26CB9W + 008CV3 | 11S18CB3V / 11S26CB9W + 011CV3 | 16S18CB3V / 16S26CB9W + 014CV3 | 16S18CB3V / 16S26CB9W + 016CV3 | 11S18CB3V / 11S26CB9W + 011CW1 | 16S18CB3V / 16S26CB9W + 014CW1 | 16S18CB3V / 16S26CB9W + 016CW1 | | | |
| Heating capacity | Nom. | | kW | 4.40(1) / 4.03(2) | 6.00(1) / 5.67(2) | 7.40(1) / 6.89(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | | | |
| Cooling capacity | Nom. | | kW | 4.08(1) / 4.17(2) | 5.88(1) / 4.84(2) | 6.20(1) / 5.36(2) | 12.1(1) / 11.7(2) | 12.7(1) / 12.6(2) | 13.8(1) / 13.1(2) | 12.1(1) / 11.7(2) | 12.7(1) / 12.6(2) | 13.8(1) / 13.1(2) | | | |
| Power input | Heating | Nom. | kW | 0.870(1) / 1.13(2) | 1.27(1) / 1.59(2) | 1.66(1) / 2.01(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | | | |
| | Cooling | Nom. | kW | 0.900(1) / 1.80(2) | 1.51(1) / 2.07(2) | 1.64(1) / 2.34(2) | 3.05(1) / 4.31(2) | 3.21(1) / 5.08(2) | 3.74(1) / 5.73(2) | 3.05(1) / 4.31(2) | 3.21(1) / 5.08(2) | 3.74(1) / 5.73(2) | | | |
| COP | | | | 5.04(1) / 3.58(2) | 4.74(1) / 3.56(2) | 4.45(1) / 3.42(2) | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | | | |
| EER | | | | 4.55(1) / 2.32(2) | 3.89(1) / 2.34(2) | 3.79(1) / 2.29(2) | 3.98(1) / 2.72(2) | 3.96(1) / 2.47(2) | 3.69(1) / 2.29(2) | 3.98(1) / 2.72(2) | 3.96(1) / 2.47(2) | 3.69(1) / 2.29(2) | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.20 | 3.22 | 3.20 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | | | |
| | | Seasonal space heating eff. class | | | A++ | | | | A+ | | | | | | |
| | | General | SCOP | 4.52 | 4.29 | 4.34 | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | | | |
| Domestic hot water heating | Average climate | General | Declared load profile | L | XL | L | XL | L | XL | L | XL | L | XL | | |
| | | Average climate | | | 95.0 | 86.4 | 90.0 | 86.4 | 90.0 | 87.4 | 97.7 | 87.4 | 97.7 | 87.4 | 97.7 |
| | | Water heating energy efficiency class | | | A | | | | A | | | | | | |

| Indoor Unit | | | | EHVX | 04S18CB3V | 08S18CB3V | 08S26CB9W | 11S18CB3V | 11S26CB9W | 16S18CB3V | 16S26CB9W |
|----------------------|---------------------------|-----------------------|-----------|---------------|-----------|-----------|-----------|--------------------|-----------|-----------|-----------|
| Casing | Colour | White | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | | |
| Weight | Unit | | kg | 117 | 119 | 129 | 119 | 128 | 120 | 130 | |
| Tank | Water volume | | l | 180 | | 260 | 180 | 260 | 180 | 260 | |
| | Maximum water temperature | | °C | 65 | | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | | |
| | Corrosion protection | | | Anode | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | | | | 15 ~55.0 | | | |
| | Cooling | Water side | Min.~Max. | °C | | | | 5.00~22.0 | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | 25~60 / 25~60 / 60 | | | |
| Sound power level | Nom. | | dBA | 42.0 | | | | 44.0 | | | |
| Sound pressure level | Nom. | | dBA | 28.0 | | | | 30.0 | | | |

| Outdoor Unit | | | | ERLQ-C | 004CV3 | 006CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 |
|----------------------|------------------------------|--------------------|---------------------|--------------------------------------|--------|--------|--------|---------------------------------------|--------|--------|--------|--------|--------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | | | | | | |
| Weight | Unit | | kg | 54 | 56 | | 113 | | 114 | | | | |
| Compressor | Quantity | | | 1 | | | | 1 | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | Hermetically sealed scroll compressor | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | 10.0~46.0 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | -20 ~35 | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | 2,087.5 | | | | | |
| | Charge | | kg | 1.5 | 1.6 | | 3.4 | | 3.4 | | | | |
| | Charge | | TCO ₂ Eq | 3.1 | 3.3 | | 7.1 | | 7.1 | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | 62 | | 64 | 66 | 66 | 64 | 66 | | |
| | Cooling | Nom. | dBA | 63 | | 64 | 66 | 69 | 64 | 66 | 69 | | |
| Sound pressure level | Heating | Nom. | dBA | 48 | 49 | | 51 | 52 | 52 | 51 | 52 | | |
| | Cooling | Nom. | dBA | 48 | 49 | 50 | | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | | | | |
| Current | Recommended fuses | | A | 16 | | | | 20 | | 40 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit

Floor standing air to water heat pump for **heating, cooling and hot water**; ideal for low energy houses

- > Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- > Perfect fit for new built as well as for low energy houses
- > Best seasonal efficiencies, providing the highest savings on running costs
- > Flexible configuration with respect to heat emitters
- > Outdoor unit extracts heat from the outdoor air, even at -20°C
- > Online controller (optional)
- > Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVX + ERHQ-B | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------|-----------------------------------|-----------------------|--------------------------------|--|--------------------|-----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--|--------------------|--|---------------------|--|---------------------|--|--------------------|--|--------------------|--|
| | | | | 11S18CB3V + 011BV3 | | 11S26CB9W + 011BV3 | | 16S26CB9W + 014BV3 | | 16S18CB3V + 014BV3 | | 16S26CB9W + 016BV3 | | 16S18CB3V + 016BV3 | | 11S18CB3V + 011BW1 | | 11S26CB9W + 011BW1 | | 16S26CB9W + 014BW17 | | 16S18CB3V + 014BW17 | | 16S18CB3V + 016BW1 | | 16S26CB9W + 016BW1 | |
| Heating capacity | Nom. | | | kW | | 11.2 (1) / 10.3(2) | | 14.0 (1) / 13.1(2) | | 16.0 (1) / 15.2(2) | | 11.3 (1) / 11.0(2) | | 14.5 (1) / 13.6(2) | | 16.1 (1) / 15.1(2) | | | | | | | | | | | |
| Cooling capacity | Nom. | | | kW | | 13.9 (1) / 10.0(2) | | 17.3 (1) / 12.5(2) | | 17.8 (1) / 13.1(2) | | 15.1 (1) / 11.7(2) | | 16.1 (1) / 12.6(2) | | 16.8 (1) / 13.1(2) | | | | | | | | | | | |
| Power input | Heating | Nom. | kW | | 2.55 (1) / 3.17(2) | | 3.26 (1) / 4.04(2) | | 3.92 (1) / 4.75(2) | | 2.63 (1) / 3.24(2) | | 3.42 (1) / 4.21(2) | | 3.82 (1) / 4.69(2) | | | | | | | | | | | | |
| | Cooling | | kW | | 3.86 (1) / 3.69(2) | | 5.86 (1) / 5.69(2) | | 6.87 (1) / 5.95(2) | | 4.53 (1) / 4.31(2) | | 5.43 (1) / 5.08(2) | | 6.16 (1) / 5.73(2) | | | | | | | | | | | | |
| COP | | | | | | 4.39 (1) / 3.25(2) | | 4.29 (1) / 3.24(2) | | 4.08 (1) / 3.20(2) | | 4.30 (1) / 3.39(2) | | 4.24 (1) / 3.22(2) | | 4.20 (1) / 3.22(2) | | | | | | | | | | | |
| EER | | | | | | 3.60 (1) / 2.71(2) | | 2.95 (1) / 2.32(2) | | 2.59 (1) / 2.20(2) | | 3.32 (1) / 2.72(2) | | 2.96 (1) / 2.47(2) | | 2.72 (1) / 2.29(2) | | | | | | | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | ηs (Seasonal space heating efficiency) | % | 2.86 | | 2.82 | | 2.92 | | 2.90 | | 2.86 / 2.80 | | 2.96 | | | | | | | | | | | |
| | | | | | | Seasonal space heating eff. class | | A+ | | | | | | | | | | | | | | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | ηs (Seasonal space heating efficiency) | % | 2.99 | | 3.23 | | 3.29 | | 3.08 | | 3.34 | | 3.33 | | | | | | | | | | | |
| | | | | | | Seasonal space heating eff. class | | A | | A+ | | A | | A+ | | | | | | | | | | | | | |
| Domestic hot water heating | General | Declared load profile | | | L | XL | L | XL | L | XL | L | XL | L | XL | L | XL | | | | | | | | | | | |
| | | Average climate | ηwh (water heating efficiency) | % | 90.5 | 95.3 | 90.5 | 95.3 | 90.5 | 95.3 | 90.5 | 84.3 | 87.3 | 84.3 | 87.3 | A | | | | | | | | | | | |

| Indoor Unit | | | | EHVX | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|---------------------------|--------------------|-----------|-----------------------|-----|------------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|--|-----------|--|-----------|--|-----------|--|-----------|--|
| | | | | 11S18CB3V | | 11S26CB9W | | 16S26CB9W | | 16S18CB3V | | 16S26CB9W | | 16S18CB3V | | 11S18CB3V | | 11S26CB9W | | 16S26CB9W | | 16S18CB3V | | 16S18CB3V | | 16S26CB9W | |
| Casing | Colour | | | White | | | | | | | | | | | | | | | | | | | | | | | |
| | Material | | | Precoated sheet metal | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | | | | | | | | | | | | | | | | | | |
| Weight | Unit | kg | | 119 | 128 | 130 | 120 | 130 | 120 | 119 | 128 | 130 | 120 | 130 | 120 | 130 | | | | | | | | | | | |
| Tank | Water volume | l | | 180 | 260 | | 180 | 260 | 180 | | 260 | | 180 | 260 | | 180 | 260 | | | | | | | | | | |
| | Maximum water temperature | °C | | 65 | | | | | | | | | | | | | | | | | | | | | | | |
| | Maximum water pressure | bar | | 10 | | | | | | | | | | | | | | | | | | | | | | | |
| | Corrosion protection | | | Anode | | | | | | | | | | | | | | | | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | | 15 ~55.0 | | | | | | | | | | | | | | | | | | | | | |
| | Cooling | Water side | Min.~Max. | °C | | 5.00~22.0 | | | | | | | | | | | | | | | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | 25~60 / 60 | | | | | | | | | | | | | | | | | | | | | |
| Sound power level | Nom. | dBA | | 42.0 | | 44.0 | | 42.0 | | 44.0 | | | | | | | | | | | | | | | | | |
| Sound pressure level | Nom. | dBA | | 28.0 | | 30.0 | | 28.0 | | 30.0 | | | | | | | | | | | | | | | | | |

| Outdoor Unit | | | | ERHQ-B | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|------------------------------|---------------------|------|---------------------------------------|--|--------|--|--------|--|--------|--|--------|--|--------|--|---------------|--|--------|--|---------|--|---------|--|--------|--|--------|--|
| | | | | 011BV3 | | 011BV3 | | 014BV3 | | 014BV3 | | 016BV3 | | 016BV3 | | 011BW1 | | 011BW1 | | 014BW17 | | 014BW17 | | 016BW1 | | 016BW1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | | | | | | | | | | 1,345x900x320 | | | | | | | | | | | |
| Weight | Unit | kg | | 102 | | | | 108 | | | | | | | | | | | | | | | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | | | | | | | | | | | | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | | | | | | | | | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | | | | | | | | | | | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | | | | | | | | | | | | | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | | | | | | | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | | | | | | | | | | | | | | | |
| | Charge | kg | | 2.7 | | | | 3.0 | | | | | | | | | | | | | | | | | | | |
| | Charge | TCO ₂ Eq | | 5.6 | | | | 6.3 | | | | | | | | | | | | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | | | 66 | | | | 64 | | | | 66 | | | | | | | | | | | |
| | Cooling | Nom. | dBA | 64 | | 66 | | 69 | | 64 | | 66 | | 69 | | | | | | | | | | | | | |
| Sound pressure level | Heating | Nom. | dBA | 49 | | 51 | | 53 | | 50 | | 51 | | 52 | | 54 | | | | | | | | | | | |
| | Cooling | Nom. | dBA | 50 | | 52 | | 54 | | 50 | | 52 | | 54 | | | | | | | | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | | | | | | | | | W1/3N~/50/400 | | | | | | | | | | | |
| Current | Recommended fuses | A | | 32 | | | | 20 | | | | | | | | | | | | | | | | | | | |


(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

Daikin Altherma low temperature split integrated Bi-Zone



Optimum efficiency offering full flexibility in heat emitters

- › Two different temperature zones can be automatically regulated by the same indoor unit
- › Offers flexibility to the end user to combine different heat emitters e.g. under floor heating and radiators while optimising the efficiency
- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system based on air to water heat pump technology
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVZ + ERLQ-C | | 04S18CB3V + 004CV3 | 08S18CB3V + 006CV3 | 08S18CB3V + 008CV3 | 16S18CB3V + 011CV3 | 16S18CB3V + 014CV3 | 16S18CB3V + 016CV3 | 16S18CB3V + 011CW1 | 16S18CB3V + 014CW1 | 16S18CB3V + 016CW1 | |
|----------------------------|-----------------------------------|--|--|--------------------|-------------------|--------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| Heating capacity | Nom. | | kW | 4.40(1) / 4.03(2) | 6.00(1) / 5.67(2) | 7.40(1) / 6.89(2) | 11.2(1) / 11.0(2) | 14.4(1) / 13.5(2) | 15.9(1) / 15.1(2) | 11.2(1) / 11.0(2) | 14.4(1) / 13.5(2) | 15.9(1) / 15.1(2) | 14.4(1) / 13.5(2) | 15.9(1) / 15.1(2) | |
| Power input | Heating | Nom. | kW | 0.870(1) / 1.13(2) | 1.27(1) / 1.59(2) | 1.66(1) / 2.01(2) | 2.43(1) / 3.10(2) | 3.39(1) / 4.12(2) | 3.77(1) / 4.67(2) | 2.43(1) / 3.10(2) | 3.39(1) / 4.12(2) | 3.77(1) / 4.67(2) | 2.43(1) / 3.10(2) | 3.39(1) / 4.12(2) | |
| COP | | | | 5.04(1) / 3.58(2) | 4.74(1) / 3.56(2) | 4.45(1) / 3.42(2) | 4.60(1) / 2.75(3) / 2.10(4) | 4.24(1) / 2.61(3) / 2.05(4) | 4.22(1) / 2.61(3) / 2.07(4) | 4.60(1) / 2.75(3) / 2.10(4) | 4.24(1) / 2.61(3) / 2.05(7) | 4.22(1) / 2.61(3) / 2.07(4) | 4.60(1) / 2.75(3) / 2.10(4) | 4.24(1) / 2.61(3) / 2.05(7) | 4.22(1) / 2.61(3) / 2.07(4) |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.20 | 3.22 | 3.23 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | |
| | | | η _s (Seasonal space heating efficiency) | 125 | 126 | | 120 | 123 | 119 | 120 | 123 | 119 | 120 | 123 | |
| | | Seasonal space heating eff. class | A++ | | | A+ | | | | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 4.52 | 4.29 | 4.34 | - | | | | | | | | |
| | | η _s (Seasonal space heating efficiency) | 178 | 169 | 171 | - | | | | | | | | | |
| | | Seasonal space heating eff. class | A++ | | | - | | | | | | | | | |
| Pump Additional Zone | Nominal ESP unit (*RLQ°C*) | Heating | kPa | 52.3 / 55.4 | 40.6 / 43.3 | 28.3 / 32.7 | 26.2 (1) / 28.3 (2) | 25.0 | 26.2 (1) / 28.3 (2) | 25.0 | 26.2 (1) / 28.3 (2) | 25.0 | 26.2 (1) / 28.3 (2) | 25.0 | |
| Pump Main Zone | Nominal ESP unit (*RLQ°C*) | Heating | kPa | 48.6 / 51.9 | 39.5 / 42.3 | 26.4 / 31.2 | 18.2 (1) / 20.7 (2) | 25.0 | 18.2 (1) / 20.7 (2) | 25.0 | 18.2 (1) / 20.7 (2) | 25.0 | 18.2 (1) / 20.7 (2) | 25.0 | |
| Domestic hot water heating | General | Declared load profile | | L | | | | | | | | | | | |
| | Average climate | η _{wh} (water heating efficiency) | % | 95.0 | 86.4 | | 87.4 | | | | | | | | |
| | | Water heating energy efficiency class | A | | | | | | | | | | | | |

| Indoor Unit | | EHVZ | | 04S18CB3V | 08S18CB3V | 08S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V |
|----------------------|---------------------------|-----------------------|-----------|---------------|-----------|-----------|-------------|-----------|-----------|-----------|-----------|-----------|
| Casing | Colour | White | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | | | |
| Weight | Unit | | kg | 121 | 122 | | 121 | | | | | |
| Tank | Water volume | | l | 180 | | | | | | | | |
| | Maximum water temperature | | °C | 65 | | | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | | | |
| | Corrosion protection | | | Anode | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | 15 ~55 | | 15 ~55 | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | 25 ~60 | | 25 ~60 / 60 | | | | | |
| Sound power level | Nom. | | dBA | 42 | | 44 | | | | | | |
| Sound pressure level | Nom. | | dBA | 28 | | 30 | | | | | | |


| Outdoor Unit | | ERLQ-C | | 004CV3 | 006CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | |
|----------------------|------------------------------|---------------------|------|--------------------------------------|--------|--------|--------|---------------------------------------|--------|--------|--------|---------------|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | | | | | 1,345x900x320 | |
| Weight | Unit | | kg | 54 | 56 | | 113 | | | | | 114 | |
| Compressor | Quantity | | | 1 | | | | | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | Hermetically sealed scroll compressor | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | 10.0~46.0 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | -20 ~35 | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | |
| | Charge | kg | | 1.5 | 1.6 | | 3.4 | | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | 3.3 | | 7.1 | | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | 64 | 66 | 66 | 64 | 66 | 66 | |
| | Cooling | Nom. | dBA | 63 | | | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | 50 | 51 | 52 | 51 | 52 | 52 | |
| | Cooling | Nom. | dBA | 48 | | 49 | 50 | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | | | W1/3N~/50/400 | |
| Current | Recommended fuses | | A | 16 | | 20 | 40 | | | | | 20 | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated Bi-Zone

Optimum efficiency offering full flexibility in heat emitters

- > Two different temperature zones can be automatically regulated by the same indoor unit
- > Offers flexibility to the end user to combine different heat emitters e.g. under floor heating and radiators while optimising the efficiency
- > Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- > Outdoor unit extracts heat from the outdoor air, even at -20°C
- > Online controller (optional)
- > Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVZ + ERHQ-B | 16S18CB3V + 011BV3 | 16S18CB3V + 014BV3 | 16S18CB3V + 016BV3 | 16S18CB3V + 011BW1 | 16S18CB3V + 014BW17 | 16S18CB3V + 016BW1 |
|----------------------------|-----------------------------------|---------------------------------------|---|---------------------------------------|--------------------|-----------------------------|--------------------|-----------------------------|---------------------|--------------------|
| Heating capacity | Nom. | | kW | 11.2(1) / 10.3(2) | 14.0(1) / 13.1(2) | 16.0(1) / 15.2(2) | 11.3(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.1(1) / 15.1(2) | |
| Power input | Heating | Nom. | kW | 2.55(1) / 3.17(2) | 3.26(1) / 4.04(2) | 3.92(1) / 4.75(2) | 2.63(1) / 3.24(2) | 3.42(1) / 4.21(2) | 3.82(1) / 4.69(2) | |
| COP | | | | 4.39(1) / 3.25(2) | 4.29(1) / 3.24(2) | 4.08(1) / 3.20(2) | 4.30(1) / 3.39(2) | 4.24(1) / 3.22(2) | 4.20(1) / 3.22(2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | 2.82 | 2.92 | 2.90 | 2.86 | 2.96 | |
| | | | η _{sp} (Seasonal space heating efficiency) | % | 112 | 110 | 114 | 113 | 111 | 115 |
| | | | | Seasonal space heating eff. class | | | | | | |
| | | | | A+ | | | | | | |
| Pump Additional Zone | Nominal ESP unit (*RHQ*B*) | Heating | kPa | 26.2 (1.000) / 35.0 (2.000) | 25.0 (5.000) | 24.8 (1.000) / 28.3 (2.000) | 25.0 (5.000) | 16.4 (1.000) / 20.7 (2.000) | 25.0 (5.000) | |
| Pump Main Zone | Nominal ESP unit (*RHQ*B*) | Heating | kPa | 18.2 (1.000) / 28.8 (2.000) | 25.0 (5.000) | 16.4 (1.000) / 20.7 (2.000) | 25.0 (5.000) | 16.4 (1.000) / 20.7 (2.000) | 25.0 (5.000) | |
| Domestic hot water heating | General | Declared load profile | | L | | | | | | |
| | | Average climate | η _{wh} (water heating efficiency) | % | 90.5 | | | | 84.3 | |
| | | | | Water heating energy efficiency class | | | | | | |
| | | | | A | | | | | | |
| Indoor Unit | | | | EHVZ | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V | 16S18CB3V |
| Casing | Colour | White | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | |
| Weight | Unit | kg | | | | | | | | |
| Tank | Water volume | l | | | | | | | | |
| | Maximum water temperature | °C | | | | | | | | |
| | Maximum water pressure | bar | | | | | | | | |
| | Corrosion protection | Anode | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | | | |
| Sound power level | Nom. | dBA | | | | | | | | |
| Sound pressure level | Nom. | dBA | | | | | | | | |
| Outdoor Unit | | | | ERHQ-B | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | | 1,345x900x320 | | |
| Weight | Unit | kg | | | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | |
| | Type | Hermetically sealed scroll compressor | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | |
| | Charge | kg | 2.7 | | | 3.0 | | | | |
| | Charge | TCO ₂ Eq | 5.6 | | | 6.3 | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | 66 | 66 | 64 | 64 | 66 | |
| | Cooling | Nom. | dBA | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 49 | 51 | 53 | 51 | 52 | 52 | |
| | Cooling | Nom. | dBA | 50 | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | V3/1~/50/230 | | | | W1/3N~/50/400 | | | |
| Current | Recommended fuses | A | 32 | | | | 20 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit without back-up heater

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 →78



| Efficiency data | | | | EHVH + ERLQ-C | | | | | | | | | | | | | | | | | | | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|---------------------------------------|-------------------|------|-------------------|--------------------|-------------------|-------------------|-------------------|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|---------------------------------------|-------------------|-------------------|--|
| | | | | 04S18CBV + 004CV3 | | 08S18CBV + 006CV3 | | 08S26CBV + 006CV3 | | 08S26CBV + 008CV3 | | 08S18CBV + 008CV3 | | 11S26CBV + 011CV3 | | 16S26CBV + 014CV3 | | 16S26CBV + 016CV3 | | 11S26CBV + 011CW1 | | 16S26CBV + 014CW1 | | 16S26CBV + 016CW1 | |
| Heating capacity | Nom. | | | kW | | 4.40(1) / 4.03(2) | | 6.00(1) / 5.67(2) | | 7.40(1) / 6.89(2) | | 11.2(1) / 11.0(2) | | 14.5(1) / 13.6(2) | | 16.0(1) / 15.2(2) | | 11.2(1) / 11.0(2) | | 14.5(1) / 13.6(2) | | 16.0(1) / 15.2(2) | | | |
| Power input | Heating | Nom. | | | kW | | 0.870(1) / 1.13(2) | | 1.27(1) / 1.59(2) | | 1.66(1) / 2.01(2) | | 2.43(1) / 3.10(2) | | 3.37(1) / 4.10(2) | | 3.76(1) / 4.66(2) | | 2.43(1) / 3.10(2) | | 3.37(1) / 4.10(2) | | 3.76(1) / 4.66(2) | | |
| COP | | | | | | 5.04(1) / 3.58(2) | | 4.74(1) / 3.56(2) | | 4.45(1) / 3.42(2) | | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | % | | 3.20 | | 3.22 | | 3.20 | | 3.09 | | 3.16 | | 3.06 | | 3.09 | | 3.16 | | 3.06 | | | |
| | | | Seasonal space heating efficiency | % | | 125 | | 126 | | 125 | | 120 | | 123 | | 119 | | 120 | | 123 | | 119 | | | |
| | | | Seasonal space heating eff. class | | | A++ | | A++ | | A++ | | A+ | | A+ | | A+ | | A+ | | A+ | | A+ | | | |
| Average climate water outlet 35°C | General | SCOP | % | | 4.52 | | 4.29 | | 4.34 | | 3.98 | | 3.90 | | 3.80 | | 3.98 | | 3.90 | | 3.80 | | | | |
| | | Seasonal space heating efficiency | % | | 178 | | 169 | | 171 | | 156 | | 153 | | 149 | | 156 | | 153 | | 149 | | | | |
| | | Seasonal space heating eff. class | | | A++ | | A++ | | A++ | | A+ | | A+ | | A++ | | A++ | | A+ | | A+ | | | | |
| Domestic hot water heating | General climate | Declared load profile | Water heating energy efficiency class | % | | L | | XL | | L | | XL | | L | | XL | | L | | XL | | L | | XL | |
| | | | Water heating energy efficiency class | % | | 95.0 | | 86.4 | | 90.0 | | 86.4 | | 97.7 | | 97.7 | | 97.7 | | 97.7 | | 97.7 | | 97.7 | |
| | | | Water heating energy efficiency class | | | A | | A | | A | | A | | A | | A | | A | | A | | A | | A | |

| Indoor Unit | | | | EHVH | | | | | | | | | | | | | | | | | | | | | |
|----------------------|----------------------------|--------------------|-----------|-----------------------|--|----------|--|----------|--|----------|--|----------|--|----------|--|----------|--|----------|--|----------|--|----------|--|----------|--|
| | | | | 04S18CBV | | 08S18CBV | | 08S26CBV | | 08S26CBV | | 08S18CBV | | 11S26CBV | | 16S26CBV | | 16S26CBV | | 11S26CBV | | 16S26CBV | | 16S26CBV | |
| Casing | Colour | | | White | | | | | | | | | | | | | | | | | | | | | |
| | Material | | | Precoated sheet metal | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | | | | | | | | | | | | | | | | |
| Weight | Unit | kg | | 116 | | 117 | | 125 | | 117 | | 124 | | 126 | | 124 | | 126 | | | | | | | |
| Tank | Water volume | l | | 180 | | 260 | | 180 | | 260 | | 260 | | 260 | | 260 | | 260 | | | | | | | |
| | Maximum water temperature | °C | | 65 | | | | | | | | | | | | | | | | | | | | | |
| | Maximum water pressure | bar | | 10 | | | | | | | | | | | | | | | | | | | | | |
| Operation range | Heating Domestic hot water | Water side | Min.~Max. | °C | | 10 ~55.0 | | 10 ~55.0 | | 25~70 | | 10 ~55.0 | | 10 ~55.0 | | 10 ~55.0 | | 10 ~55.0 | | | | | | | |
| | | | Min.~Max. | °C | | 25~70 | | 25~70 | | 25~70 | | 25~70 | | 25~70 | | 25~70 | | 25~70 | | | | | | | |
| | | | Min.~Max. | °C | | 25~70 | | | | | | | | | | | | | | | | | | | |
| Sound power level | Nom. | dBA | | 42.0 | | 44.0 | | 42.0 | | 44.0 | | 42.0 | | 44.0 | | 42.0 | | 44.0 | | | | | | | |
| Sound pressure level | Nom. | dBA | | 28.0 | | 30.0 | | 28.0 | | 30.0 | | 28.0 | | 30.0 | | 28.0 | | 30.0 | | | | | | | |

| Outdoor Unit | | | | ERLQ-C | | | | | | | | | | | | | | | | | | | | | |
|----------------------|------------------------------|---------------------|------|--------------------------------------|-----|-------------|-----|-----------|-----|-----------|-----|-----------|-----|--------------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|--|
| | | | | 004CV3 | | 006CV3 | | 006CV3 | | 008CV3 | | 008CV3 | | 011CV3 | | 014CV3 | | 016CV3 | | 011CW1 | | 014CW1 | | 016CW1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 54 | | 735x832x307 | | 56 | | 113 | | 113 | | 1345x900x320 | | 114 | | 114 | | 114 | | 114 | | 114 | |
| Weight | Unit | kg | | 54 | | 56 | | 56 | | 113 | | 113 | | 113 | | 113 | | 113 | | 113 | | 113 | | 113 | |
| Compressor | Quantity | | | 1 | | | | | | | | | | | | | | | | | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | | | | | | | | | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | | 10.0~43.0 | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | | -25 ~35 | |
| Refrigerant | Type | | | R-410A | | | | | | | | | | | | | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | | | | | | | | | | | | | |
| | Charge | kg | | | 1.5 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | 1.6 | | |
| | Charge | TCO ₂ Eq | | | 3.1 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.3 | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | | 62 | | 64 | | 66 | | 66 | | 66 | | 66 | | 66 | | 66 | | 66 | |
| | Cooling | Nom. | dBA | 61 | | 62 | | 62 | | 64 | | 66 | | 66 | | 66 | | 66 | | 66 | | 66 | | 66 | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | | 49 | | 51 | | 51 | | 52 | | 52 | | 52 | | 52 | | 52 | | 52 | |
| | Cooling | Nom. | dBA | 48 | | 49 | | 49 | | 51 | | 51 | | 52 | | 52 | | 52 | | 52 | | 52 | | 52 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | | | | | | | | | | | | | | | | | | |
| Current | Recommended fuses | A | | 16 | | 20 | | 20 | | 40 | | 40 | | 40 | | 40 | | 40 | | 40 | | 40 | | 40 | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit without back-up heater

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVH + ERHQ-B | 11S26CBV + 011BV3 | 16S26CBV + 014BV3 | 16S26CBV + 016BV3 | 11S26CBV + 011BW1 | 16S26CBV + 014BW17 | 16S26CBV + 016BW1 |
|----------------------------|-----------------------------------|--|--|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-------------------|
| Heating capacity | Nom. | | kW | 11.2 (1) / 10.3(2) | 14.0 (1) / 13.1(2) | 16.0 (1) / 15.2(2) | 11.3 (1) / 11.0(2) | 14.5 (1) / 13.6(2) | 16.1 (1) / 15.1(2) | |
| Power input | Heating | Nom. | kW | 2.55 (1) / 3.17(2) | 3.26 (1) / 4.04(2) | 3.92 (1) / 4.75(2) | 2.63 (1) / 3.24(2) | 3.42 (1) / 4.21(2) | 3.82 (1) / 4.69(2) | |
| COP | | | | 4.39 (1) / 3.25(2) | 4.29 (1) / 3.24(2) | 4.08 (1) / 3.20(2) | 4.30 (1) / 3.39(2) | 4.24 (1) / 3.22(2) | 4.20 (1) / 3.22(2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | 2.82 | 2.92 | 2.90 | 2.86 | 2.96 | |
| | | | η_s (Seasonal space heating efficiency) % | 112 | 110 | 114 | 113 | 111 | 115 | |
| | Average climate water outlet 35°C | General | SCOP | 2.99 | 3.23 | 3.29 | 3.08 | 3.34 | 3.33 | |
| | | | η_s (Seasonal space heating efficiency) % | 117 | 126 | 129 | 120 | 131 | 130 | |
| | | | Seasonal space heating eff. class | A+ | | | | | | |
| Domestic hot water heating | General | Declared load profile | | XL | | | | | | |
| | Average climate | η_{wh} (water heating efficiency) % | | 95.3 | | | | 87.3 | | |
| | | | Water heating energy efficiency class | A | | | | | | |

| Indoor Unit | | | EHVH | 11S26CBV | 16S26CBV | 16S26CBV | 11S26CBV | 16S26CBV | 16S26CBV |
|----------------------|---------------------------|----------------------|-----------------------|----------|----------|----------|----------|----------|----------|
| Casing | Colour | | White | | | | | | |
| | Material | | Precoated sheet metal | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | |
| | | | 1,732x600x728 | | | | | | |
| Weight | Unit | | kg | | | | | | |
| | | | 124 | | 126 | | 124 | | 126 |
| Tank | Water volume | | l | | | | | | |
| | | | 260 | | | | | | |
| | Maximum water temperature | | °C | | | | | | |
| | | | 65 | | | | | | |
| Operation range | Heating | Water side Min.~Max. | °C | | | | | | |
| | | | 10 ~55.0 | | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | | | | | | |
| | | | 25~70 | | | | | | |
| Sound power level | Nom. | | 42.0 | | 44.0 | | 42.0 | | 44.0 |
| Sound pressure level | Nom. | | 28.0 | | 30.0 | | 28.0 | | 30.0 |

| Outdoor Unit | | | ERHQ-B | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 | |
|----------------------|------------------------------|---------------------|---------------------------------------|--------|--------|---------------|---------------|---------|--------|----|
| Dimensions | Unit | HeightxWidthxDepth | mm | | | 1,170x900x320 | | | | |
| | | | | | | 1,345x900x320 | | | | |
| Weight | Unit | | kg | | | | | | | |
| | | | 102 | | | 108 | | | | |
| Compressor | Quantity | | 1 | | | | | | | |
| | Type | | Hermetically sealed scroll compressor | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | |
| | | | 10.0~46.0 | | | | | | | |
| Refrigerant | Domestic hot water | Min.~Max. | °CDB | | | | | | | |
| | | | -20 ~35 | | | | | | | |
| | Type | | R-410A | | | | | | | |
| | GWP | | 2,087.5 | | | | | | | |
| Charge | | | kg | | | | | | | |
| | | | 2.7 | | | 3.0 | | | | |
| | | TCO ₂ Eq | 5.6 | | | 6.3 | | | | |
| Sound power level | Heating | Nom. | 64 | | | 66 | | 64 | | 66 |
| | Cooling | Nom. | 64 | 66 | 69 | 64 | 66 | 69 | | |
| Sound pressure level | Heating | Nom. | 49 | | | 51 | | 53 | | 52 |
| | Cooling | Nom. | 50 | 52 | 54 | 50 | 52 | 54 | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | | | | W1/3N~/50/400 | | | |
| Current | Recommended fuses | | A | | | | 20 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit for UK

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses

- > Integrated indoor unit: pre-plumbed and pre-wired indoor unit for a simpler, hassle free and neater heating and hot water installation
- > Perfect fit for new built as well as for low energy houses
- > Best seasonal efficiencies, providing the highest savings on running costs
- > Flexible configuration with respect to heat emitters
- > Online controller (optional)
- > Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHVH + ERLQ-C | | | | | | | | | | | |
|-----------------------------------|-----------------------------------|---|---|------------------------|------------------------|------------------------|------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|------------------------|--|
| | | | | 04SU18CB6W + 004CV3 | 08SU18CB6W + 006CV3 | 08SU26CB6W + 006CV3 | 08SU26CB6W + 008CV3 | 08SU18CB6W + 008CV3 | 11SU26CB6W + 011CV3 | 16SU26CB6W + 014CV3 | 16SU26CB6W + 016CV3 | 11SU26CB6W + 011CW1 | 16SU26CB6W + 014CW1 | 16SU26CB6W + 016CW1 | |
| Heating capacity | Nom. | kW | | 4.40(1) / 4.03(2) | 6.00(1) / 5.67(2) | 7.40(1) / 6.89(2) | | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | | |
| Power input | Heating | Nom. | kW | 0.870(1) / 1.13(2) | 1.27(1) / 1.59(2) | 1.66(1) / 2.01(2) | | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | | |
| COP | | | | 5.04(1) / 3.58(2) | 4.74(1) / 3.56(2) | 4.45(1) / 3.42(2) | | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | 4.60(1) / 2.75(3) / 3.55(2) / 2.10(4) | 4.30(1) / 2.65(3) / 3.32(2) / 2.08(4) | 4.25(1) / 2.64(3) / 3.26(2) / 2.09(4) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.20 | 3.22 | 3.20 | | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | | |
| | | | η _{sp} (Seasonal space heating efficiency) | 125 | 126 | 125 | | 120 | 123 | 119 | 120 | 123 | 119 | | |
| | | | | A++ | | | | A+ | | | | | | | |
| Average climate water outlet 35°C | General | SCOP | 4.52 | 4.29 | 4.34 | | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | | | |
| | | η _{sp} (Seasonal space heating efficiency) | 178 | 169 | 171 | | 156 | 153 | 149 | 156 | 153 | 149 | | | |
| | | | | A++ | | | | A+ | | A++ | | A+ | | | |
| Domestic hot water heating | General climate | Declared load profile | | L | | XL | | L | | XL | | | | | |
| | | Average | η _{wh} (water heating efficiency) | 95.0 | 86.4 | 90.0 | | 86.4 | | 97.7 | | | | | |
| | | | | A | | | | A | | | | | | | |
| Indoor Unit | | | | EHVH | | | | | | | | | | | |
| Casing | Colour | White | | | | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | | | | | | |
| Weight | Unit | kg | | 118 | 121 | 127 | 121 | 128 | 130 | 128 | 130 | | | | |
| Tank | Water volume | l | | 180 | | 260 | | 180 | | 260 | | | | | |
| | Maximum water temperature | °C | | 65 | | | | | | | | | | | |
| | Maximum water pressure | bar | | 10 | | | | | | | | | | | |
| | Corrosion protection | Anode | | | | | | | | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | 15 ~55.0 | | | | 15 ~55.0 | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | 25~65 | | | | 25~65 | | | | | | | |
| Sound power level | Nom. | dBA | | 42.0 | | | | 44.0 | | 42.0 | | 44.0 | | | |
| Sound pressure level | Nom. | dBA | | 28.0 | | | | 30.0 | | 28.0 | | 30.0 | | | |
| Outdoor Unit | | | | ERLQ-C | | | | | | | | | | | |
| | | | | 004CV3 | 006CV3 | 006CV3 | 008CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | | | 1,345x900x320 | | | | | |
| Weight | Unit | kg | | 54 | 56 | | 56 | | 113 | | 114 | | 114 | | |
| Compressor | Quantity | 1 | | | | | | | | | | | | | |
| | Type | Hermetically sealed swing compressor | | | | | | Hermetically sealed scroll compressor | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | | | 10.0~46.0 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | | | -20 ~35 | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | | | | | | |
| | Charge | kg | 1.5 | | 1.6 | | 3.4 | | | | | | | | |
| | Charge | TCO ₂ Eq | 3.1 | | 3.3 | | 7.1 | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | | 64 | | 66 | | 64 | | 66 | |
| | Cooling | Nom. | dBA | 63 | | 63 | | 64 | | 66 | | 64 | | 66 | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | | 51 | | 52 | | 51 | | 52 | |
| | Cooling | Nom. | dBA | 48 | | 49 | | 50 | | 52 | | 50 | | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | | | W1/3N~/50/400 | | | | | |
| Current | Recommended fuses | A | | 16 | | 20 | | 40 | | 20 | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated floor standing unit for UK

Floor standing air to water heat pump for heating and hot water, ideal for low energy houses














- › Integrated indoor unit: pre-plumbed and pre-wired indoor unit for a simpler, hassle free and neater heating and hot water installation
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)




up to **R-410A**

| Efficiency data | | | | EHVH + ERHQ-B | 11SU26CB6W + 011BV3 | 16SU26CB6W + 014BV3 | 16SU26CB6W + 016BV3 | 11SU26CB6W + 011BW1 | 16SU26CB6W + 014BW17 | 16SU26CB6W + 016BW1 |
|-----------------------------------|---------------------------------------|--|--|---------------------------------------|---------------------|---------------------|---------------------|---------------------|----------------------|---------------------|
| Heating capacity | Nom. | | kW | 11.2(1) / 10.3(2) | 14.0(1) / 13.1(2) | 16.0(1) / 15.2(2) | 11.3(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.1(1) / 15.1(2) | |
| Power input | Heating | Nom. | kW | 2.55(1) / 3.17(2) | 3.26(1) / 4.04(2) | 3.92(1) / 4.75(2) | 2.63(1) / 3.24(2) | 3.42(1) / 4.21(2) | 3.82(1) / 4.69(2) | |
| COP | | | | 4.39(1) / 3.25(2) | 4.29(1) / 3.24(2) | 4.08(1) / 3.20(2) | 4.30(1) / 3.39(2) | 4.24(1) / 3.22(2) | 4.20(1) / 3.22(2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | 2.82 | 2.92 | 2.90 | 2.86 | 2.96 | |
| | | | η _s (Seasonal space heating efficiency) | 112 | 110 | 114 | 113 | 111 | 115 | |
| | Seasonal space heating eff. class | | | A+ | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 2.99 | 3.23 | 3.29 | 3.08 | 3.34 | 3.33 | |
| | | η _s (Seasonal space heating efficiency) | 117 | 126 | 129 | 120 | 131 | 130 | | |
| Seasonal space heating eff. class | | | A | A+ | | A | A+ | | | |
| Domestic hot water heating | General | Declared load profile | | | XL | | | | | |
| | Average climate | η _{wh} (water heating efficiency) | % | 95.3 | | | 87.3 | | | |
| | Water heating energy efficiency class | | | A | | | | | | |
| Indoor Unit | | | | EHVH | 11SU26CB6W | 16SU26CB6W | 16SU26CB6W | 11SU26CB6W | 16SU26CB6W | 16SU26CB6W |
| Casing | Colour | White | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | | | | | | |
| Weight | Unit | | kg | 128 | 130 | | | 128 | 130 | |
| Tank | Water volume | | l | 260 | | | | | | |
| | Maximum water temperature | | °C | 65 | | | | | | |
| | Maximum water pressure | | bar | 10 | | | | | | |
| | Corrosion protection | | | Anode | | | | | | |
| Operation range | Heating | Water side | Min.~Max. | °C | 15 ~55.0 | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | 25~65 | | | | | |
| Sound power level | Nom. | | dBA | 42.0 | 44.0 | | | 42.0 | 44.0 | |
| Sound pressure level | Nom. | | dBA | 28.0 | 30.0 | | | 28.0 | 30.0 | |
| Outdoor Unit | | | | ERHQ-B | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | | 1,345x900x320 | | |
| Weight | Unit | | kg | 102 | | | | 108 | | |
| Compressor | Quantity | | | 1 | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | |
| | GWP | | | 2,087.5 | | | | | | |
| | Charge | | kg | 2.7 | | | 3.0 | | | |
| | Charge | | TCO ₂ Eq | 5.6 | | | 6.3 | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | | 66 | | 66 | |
| | Cooling | Nom. | dBA | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 49 | 51 | 53 | 51 | 52 | 52 | |
| | Cooling | Nom. | dBA | 50 | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | W1/3N~/50/400 | | |
| Current | Recommended fuses | | A | 32 | | | | 20 | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Contains fluorinated greenhouse gases

| | Type | Material name | Daikin Altherma R W / F | | |
|----------------|---|--|-------------------------|---------|---|
| | | | 4-8kW | 11-16kW | |
| Controls |  | LAN adapter | BRP069A62 | • | • |
| |  | LAN adapter + PV solar connection | BRP069A61 | • | • |
| | | Remote user interface (DE, FR, NL, IT) | EKRUCBL1 | • | • |
| | | Remote user interface (EN, ES, EL, PT) | EKRUCBL3 | • | • |
| | | Remote user interface (EN, SV, NO, FI) | EKRUCBL2 | • | • |
| | | Remote user interface (EN, TR, PL, RO) | EKRUCBL4 | • | • |
| | | Remote user interface (DE, CS, SL, SK) | EKRUCBL5 | • | • |
| | | Remote user interface (EN, HR, HU, BG) | EKRUCBL6 | • | • |
| | | Remote user interface (EN, DE, RU, DA) | EKRUCBL7 | • | • |
| | | Simplified user interface | EKRUCBSB | • | • |
| |  | Room thermostat (wired) | EKRTWA | • | • |
| |  | Room thermostat (wireless) | EKRTR1 | • | • |
| | | Centralised controller kit | EKCC-W | • | • |
| Adapter |  | DCOM gateway | DCOM-LT/IO | | |
| |  | DCOM gateway | DCOM-LT/MB | | |
| Adapter |  | Demand PCB | EKR1AHTA | • | • |
| |  | Digital I/O PCB | EKR1HBAA | • | • |
| Back-up heater |  | Back-up heater kit | EKLBUHCB6W1 | | • |
| | | Booster heater for tank integrated design | EKBShCA3V3 | | • |
| | | Bottom plate heater | EKBPHTH16A | | • |
| Drain | | Drain kit | EKDK04 | • | • |
| | | Drain pan for indoor wall munted | EKHBDPCA2 | • | • |
| | | Drain pan for outdoor (excl heater) | EKDP008CA | • | |
| | | Drain pan heater | EKDPH008CA | • | |
| Filter | | Magnetic filter without additives | K.FERNOXTF1 | • | • |
| | | Magnetic filter with additive (500ml inhibitor fluid F1) | K.FERNOXTF1FL | • | • |
| Installation | | Bi-Zone kit | BZKA7V3 | • | • |
| | | Snowcover | EK016SNCA | | • |
| | | U-beams for outdoor | EKFT008CA | • | |
| | | UK tank kit | EKVSU260A | | • |
| Sensor |  | Remote indoor sensor | KRCS01-1B | • | • |
| |  | Remote sensor for outdoor | EKRSCA1 | • | |
| |  | External sensor | EKRTETS | • | • |
| Others |  | PC cable | EKPCCAB1 | • | • |
| | | Low sound cover for ERLQ-CV3 | EKLN-A | • | |

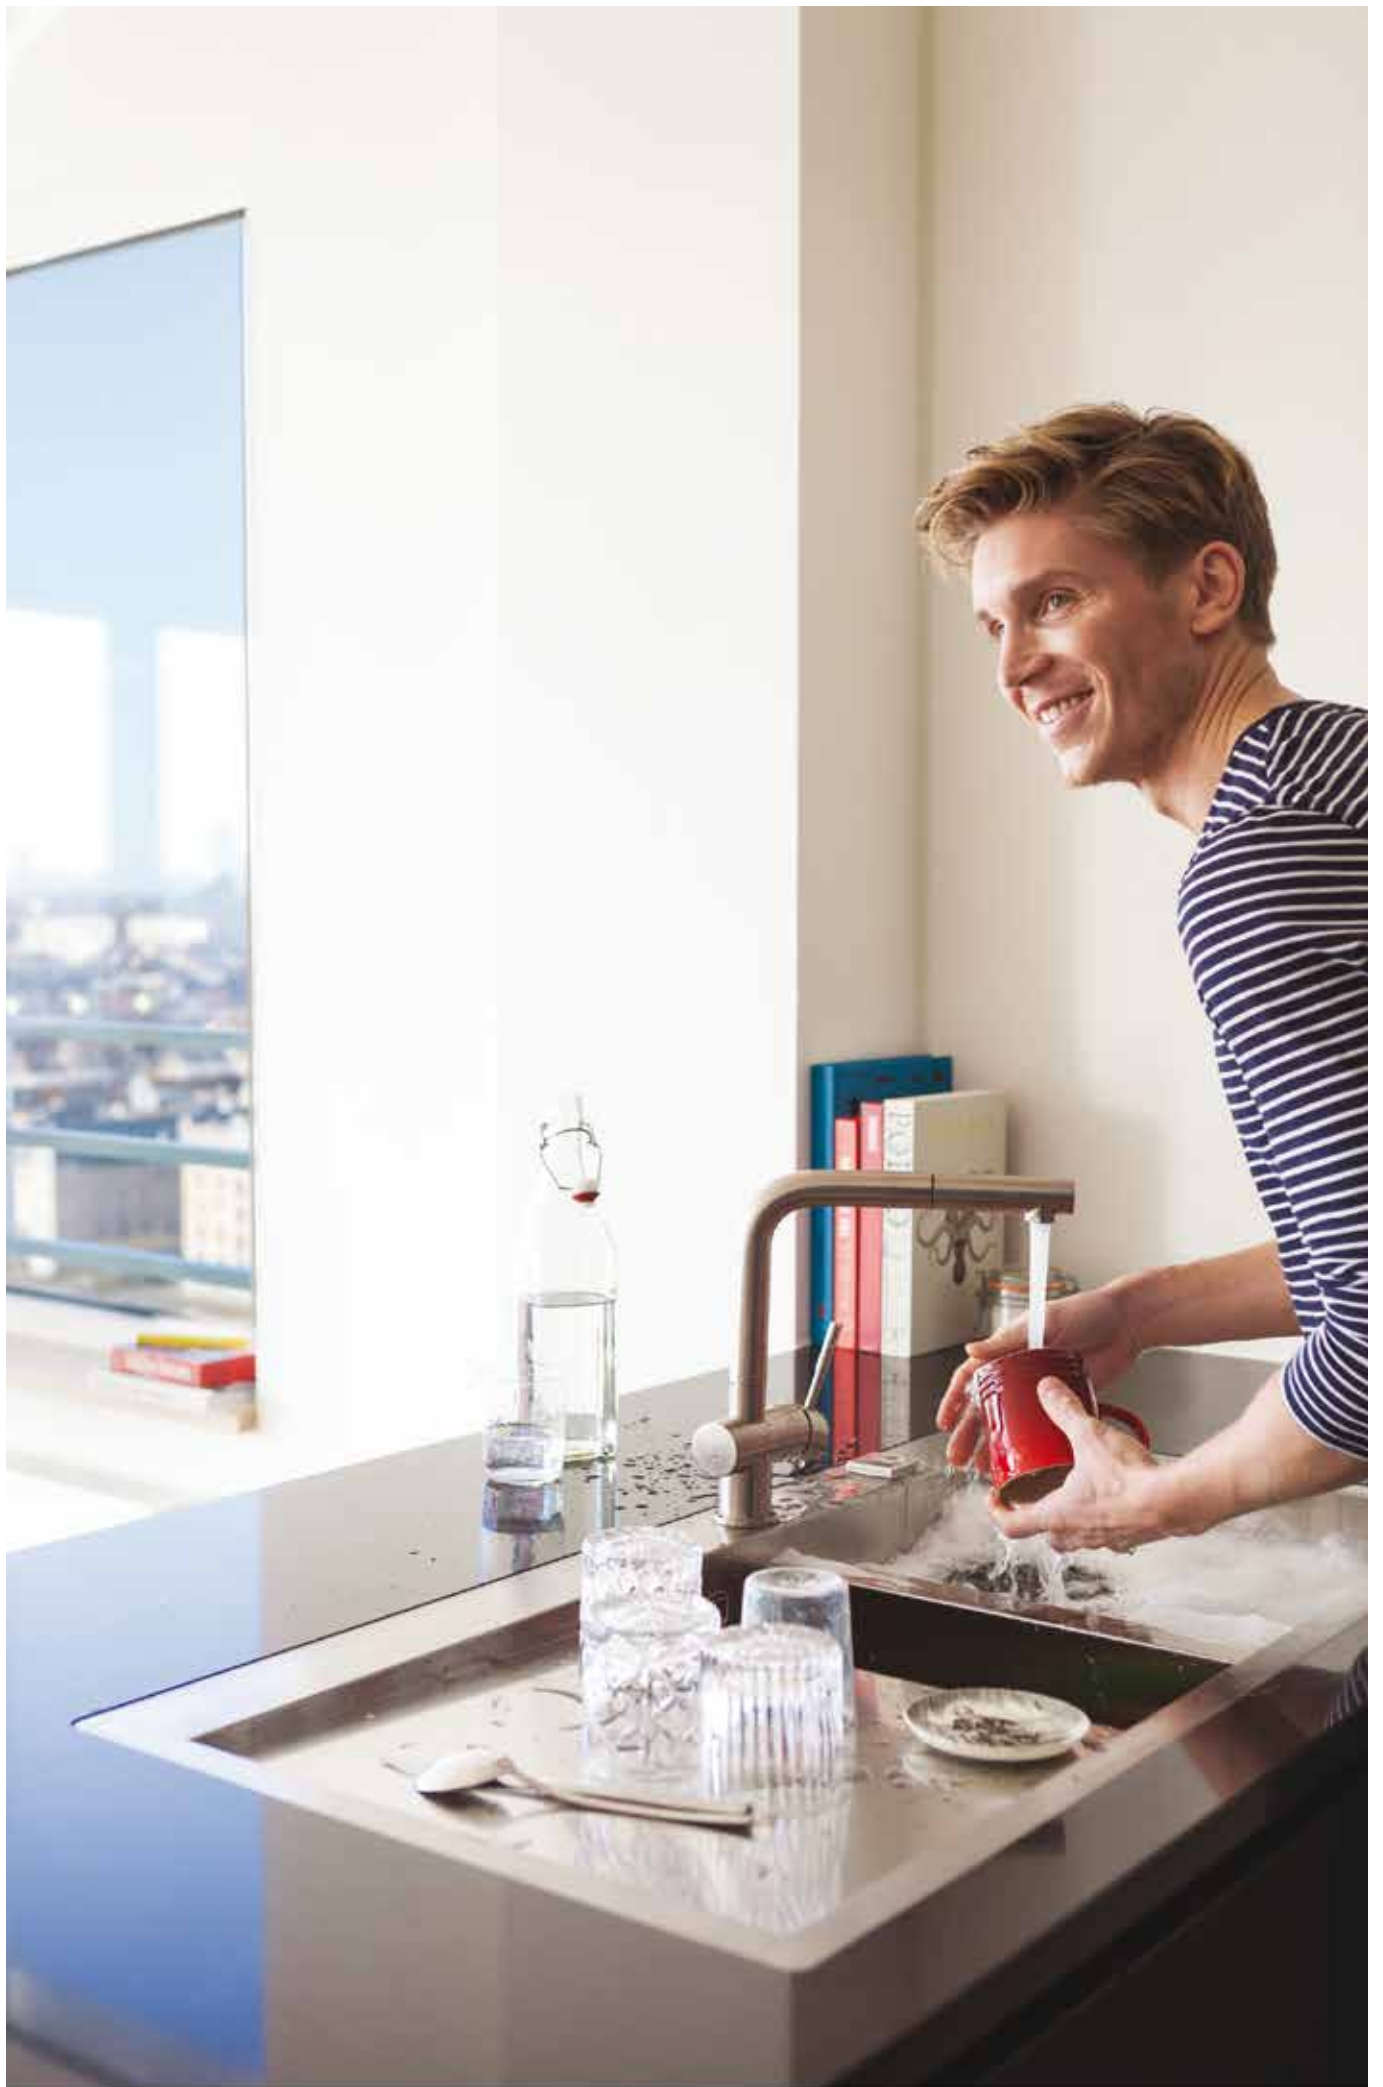

R-410A



Daikin Altherma R ECH₂O low temperature split integrated ECH₂O

The Daikin Altherma low temperature split integrated ECH₂O is renowned for its ability to maximise renewable energy sources to provide the ultimate comfort in heating, domestic hot water and cooling

Intelligent storage management

- › The unit is 'Smart Grid' ready to take advantage of low energy tariffs and efficiently store thermal energy for space heating and domestic hot water
- › Continuous heating during defrost mode and use of stored heat for space heating (500l tank only)
- › Electronic management of both heat pump and ECH₂O thermal store maximises energy efficiency, as well as convenient heating and domestic hot water
- › Achieves the highest standards for water sanitation
- › Uses more renewable energy with solar connection


Innovative and high-quality tank

- › Lightweight plastic tank
- › No corrosion, anode, scale or lime deposits
- › Contains impact resistant polypropylene inner and outer walls filled with high-grade insulation foam to reduce heat losses to a minimum

Combinable with other heat sources

- › The bivalent option allows heat from other sources such as oil, gas or pellet-fired boilers to be stored in the solar system, further lowering energy consumption

ECH₂O

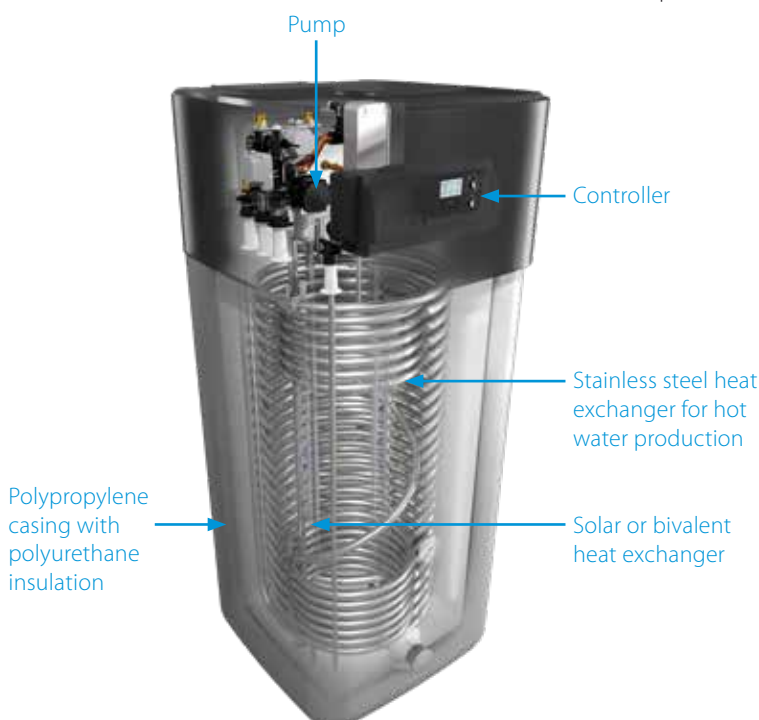



ECH₂O thermal store range: additional hot water comfort

Combine your indoor unit with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options


Pressureless (drain-back) solar system (EHSB, EHSX-B)

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system (EHSB-B, EHSX-B)

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed


Monthly energy consumption of an average detached house

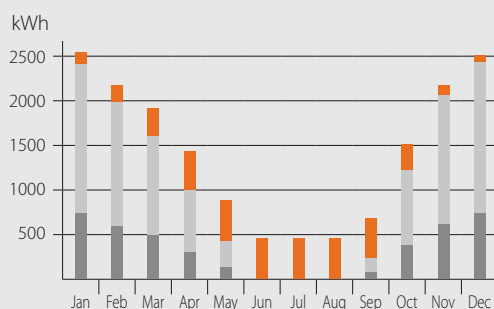

- Utilisation of solar energy for domestic hot water and central heating
- Heat pump (environmental heat)
- Auxiliary energy (electricity)

System diagram: Integrated solar unit

- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station

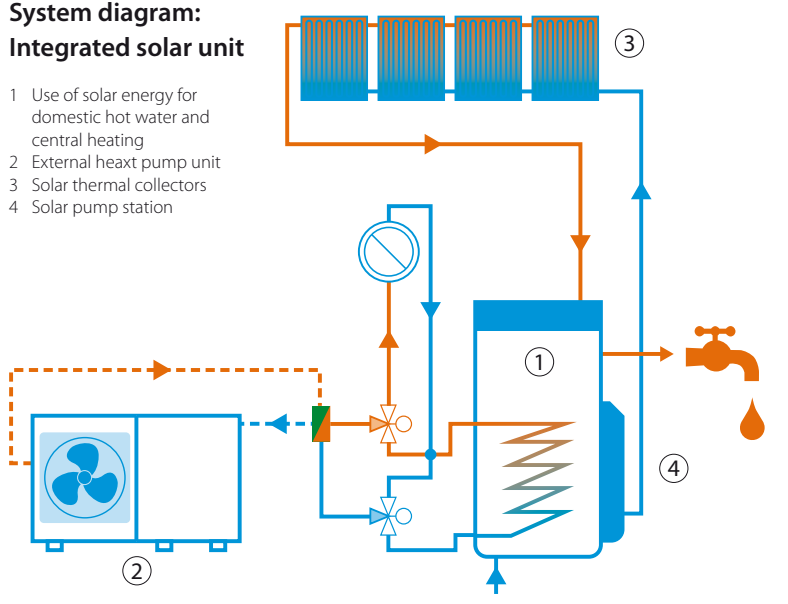

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for heating and hot water with thermal solar support

- Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- Solar support of domestic hot water with pressureless (drain-back) solar system
- Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- Heat loss is reduced to a minimum thanks to the high quality insulation
- Possible to connect to photovoltaic solar panels to provide energy for your heat pump



011-1W0087 → 95

| Efficiency data | | EHSB + ERLQ-C | | 04P30B + 004CV3 | 08P30B + 006CV3 | 08P50B + 006CV3 | 08P30B + 008CV3 | 08P50B + 008CV3 | 16P50B + 011CV3 | 16P50B + 014CV3 | 16P50B + 016CV3 | 16P50B + 011CW1 | 16P50B + 014CW1 | 16P50B + 016CW1 | |
|----------------------------|-----------------------------------|-----------------------------------|--|---------------------------------------|---------------------------------------|-----------------------|---------------------------------------|-----------------------|---|---|--|---|---|--|--|
| Heating capacity | Nom. | kW | | 4.26(1) / 3.47(2) / 4.53(3) / 3.98(4) | 5.14(1) / 4.60(2) / 6.06(3) / 5.78(4) | | 5.53(1) / 5.51(2) / 7.78(3) / 7.27(4) | | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 8.28(1) / 9.57(2) / 14.81(3) / 13.73(4) | 15.34(1) / 14.86(2) / 8.04(3) / 10.05(4) | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 8.28(1) / 9.57(2) / 14.81(3) / 13.73(4) | 8.04(1) / 10.05(2) / 15.34(3) / 14.86(4) | |
| Power input | Heating | Nom. | kW | 0.87(1) / 1.04(2) / 1.49(3) / 0.85(4) | 1.30(1) / 1.58(2) / 1.88(3) / 1.26(4) | | 1.69(1) / 2.04(2) / 1.98(3) / 1.56(4) | | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 3.42(1) / 4.07(2) / 3.17(3) / 2.93(4) | | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 3.42(1) / 4.07(2) / 3.17(3) / 2.93(4) | | |
| COP | | | | 5.23(1) / 3.84(2) / 2.85(3) / 4.07(4) | 4.65(1) / 3.66(2) / 2.73(3) / 3.64(4) | | 4.60(1) / 3.57(2) / 2.78(3) / 3.54(4) | | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10(1) / 3.22(2) / 2.44(3) / 3.15(4) | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10(1) / 3.22(2) / 2.44(3) / 3.15(4) | |
| Space heating | Average climate water outlet 55°C | General | η _s (Seasonal space heating efficiency) | % | | 130 | 125 | 127 | 125 | 126 | 125 | 126 | 125 | 125 | |
| | | Seasonal space heating eff. class | | | | | | A++ | | | | | | | |
| Domestic hot water heating | General Average climate | Declared load profile | | % | | L | XL | L | 96 | XL | | 83 | | A | |
| | | Average climate | | Water heating energy efficiency class | | | | | | | | | | | |

| Indoor Unit | | EHSB | | 04P30B | 08P30B | 08P50B | 08P30B | 08P50B | 16P50B | | |
|----------------------|---------------------------|---|-----------|--------|--------|-----------------------|-----------------------|-----------------------|-----------------------|---------|--|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | | 1,945 / 1,890x615x595 | 1,945 / 1,890x790x790 | 1,945 / 1,890x615x595 | 1,945 / 1,890x790x790 | | |
| Weight | Unit | kg | | 84 | 111 | 84 | 111 | 113 | | | |
| Tank | Water volume | l | | 294 | 477 | 294 | 477 | | | | |
| | Maximum water temperature | °C | | | | 85 | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | -25~-25 | | 15~55 | | -25~-35 | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | -25~-35 | | | |
| | Water side | Min.~Max. | °C | | | | 25~55 | | | | |
| Sound power level | Nom. | dBA | | 40 | | | | | | | |
| Sound pressure level | Nom. | dBA | | 28 | | | | | | | |

| Outdoor Unit | | ERLQ-C | | 004CV3 | 006CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 |
|----------------------|------------------------------|---------------------|-----|--------------------------------------|--------|---------------------------------------|--------|---------------|--------|---------------|--------|--------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | | 735x832x307 | | 1,345x900x320 | | | | |
| Weight | Unit | kg | | 54 | 56 | | 113 | | 114 | | | |
| Compressor | Quantity | | | | | 1 | | | | | | |
| | Type | | | Hermetically sealed swing compressor | | Hermetically sealed scroll compressor | | | | | | |
| Operation range | Cooling | Min.~Max. | | °CDB | | 10.0~43.0 | | 10.0~46.0 | | | | |
| | Domestic hot water | Min.~Max. | | °CDB | | -25~-35 | | -20~-35 | | | | |
| Refrigerant | Type | | | | | R-410A | | | | | | |
| | GWP | | | | | 2,087.5 | | | | | | |
| | Charge | kg | | 1.5 | 1.6 | | 3.4 | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | 3.3 | | 7.1 | | | | | |
| | Control | | | | | Expansion valve (electronic type) | | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | | 64 | 66 | 64 | 66 | 66 |
| | Cooling | Nom. | dBA | 63 | | 63 | | 64 | 66 | 64 | 66 | 69 |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | | 51 | 52 | 51 | 52 | 52 |
| | Cooling | Nom. | dBA | 48 | | 49 | | 50 | 52 | 50 | 52 | 54 |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | V3/1~/50/230 | | V3/1~/50/230 | | W1/3N~/50/400 | | |
| Current | Recommended fuses | A | | 16 | | 20 | | 40 | | 20 | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for bivalent heating and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating and hot water
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Bivalent system: combinable with a secondary heat source
- › Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating and hot water operation



| Efficiency data | | EHSB + ERLQ-C | | 04P30B + 004CV3 | 08P30B + 006CV3 | 08P50B + 006CV3 | 08P30B + 008CV3 | 08P50B + 008CV3 | 16P50B + 011CV3 | 16P50B + 014CV3 | 16P50B + 016CV3 | 16P50B + 011CW1 | 16P50B + 014CW1 | 16P50B + 016CW1 |
|----------------------------|-----------------------------------|---------------|--|---------------------------------------|---------------------------------------|-----------------|---------------------------------------|-----------------|---|---|--|---|---|------------------------------|
| Heating capacity | Nom. | kW | | 4.26(1) / 3.47(2) / 4.53(3) / 3.98(4) | 5.14(1) / 4.60(2) / 6.06(3) / 5.78(4) | | 5.53(1) / 5.51(2) / 7.78(3) / 7.27(4) | | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 14.81(1) / 13.73(2) / 8.28(3) / 9.57(4) | 15.34(1) / 14.86(2) / 8.04(3) / 10.05(4) | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 8.28(1) / 9.57(2) / 14.81(3) / 13.73(4) | 8.04 / 10.05 / 15.34 / 14.86 |
| Power input | Heating Nom. | kW | | 0.87(1) / 1.04(2) / 1.49(3) / 0.85(4) | 1.30(1) / 1.58(2) / 1.88(3) / 1.26(4) | | 1.69(1) / 2.04(2) / 1.98(3) / 1.56(4) | | 2.57(1) / 2.43(3) / 2.35(4) | 3.42(1) / 3.17(3) / 2.93(4) | 4.07(2) / 2.93(4) | 2.57(1) / 2.43(3) / 2.35(4) | 3.42(1) / 3.17(3) / 2.93(4) | 3.42 / 4.07 / 3.17 / 2.93 |
| COP | | | | 5.23(1) / 3.84(2) / 2.85(3) / 4.07(4) | 4.65(1) / 3.66(2) / 2.73(3) / 3.64(4) | | 4.60(1) / 3.57(2) / 2.78(3) / 3.54(4) | | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10(1) / 3.22(2) / 2.44(3) / 3.15(4) | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10 / 3.22 / 2.44 / 3.15 |
| Space heating | Average climate water outlet 55°C | General | ηs (Seasonal space heating efficiency) Seasonal space heating eff. class | 130 | 125 | | 127 | | 125 | 126 | 125 | | 126 | 125 |
| Domestic hot water heating | Average climate | General | Declared load profile ηwh (water heating efficiency) Water heating energy efficiency class | L | | XL | L | 99 | XL | | | | | |
| | | | | 103 | 98 | 108 | 90 | 84 | | | | | | |
| | | | | A | | | | | | | | | | |

| Indoor Unit | | EHSB | | 04P30B | 08P30B | 08P50B | 08P30B | 08P50B | 16P50B | 16P50B | 16P50B | 16P50B | 16P50B | 16P50B | | | |
|----------------------|---------------------------|---|-----------|--------|---------------|--------|---------------|--------|---------------|--------|---------------|--------|--------|--------|--|--|--|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | | | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | 1,890x615x595 | | 1,890x790x790 | | 1,890x615x595 | | 1,890x790x790 | | | | | | |
| Weight | Unit | kg | | 89 | 116 | 89 | 116 | 118 | | | | | | | | | |
| Tank | Water volume | l | | 294 | 477 | 294 | 477 | | | | | | | | | | |
| | Maximum water temperature | °C | | | | | | 85 | | | | | | | | | |
| Operation range | Heating Ambient | Min.~Max. | °C | | -25~25 | | | | -25~35 | | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | | | 15~55 | | | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | | | -25~35 | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | | | | | | 25~55 | | | | | | | |
| Sound power level | Nom. | dBA | | 40 | | | | | | | | | | | | | |
| Sound pressure level | Nom. | dBA | | 28 | | | | | | | | | | | | | |

| Outdoor Unit | | ERLQ-C | | 004CV3 | 006CV3 | 006CV3 | 008CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | |
|----------------------|------------------------------|--------------------------------------|------|--------------|-------------|--------|--------|---------------------------------------|---------------|--------|--------|--------|---------------|--------|----|
| Dimensions | Unit | HeightxWidthxDepth | mm | | 735x832x307 | | | | 1,345x900x320 | | | | | | |
| Weight | Unit | kg | | 54 | 56 | | 113 | | | | | | | 114 | |
| Compressor | Quantity | 1 | | | | | | | | | | | | | |
| | Type | Hermetically sealed swing compressor | | | | | | Hermetically sealed scroll compressor | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | 10.0~43.0 | | | | 10.0~46.0 | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | -25~35 | | | | -20~35 | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | | | | | | |
| | Charge | kg | | 1.5 | 1.6 | | 3.4 | | | | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | 3.3 | | 7.1 | | | | | | | | |
| | Control | Expansion valve (electronic type) | | | | | | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | | 61 | | 62 | | 64 | | 66 | | 64 | | 66 |
| | Cooling | Nom. | dBA | | 63 | | 63 | | 64 | | 66 | | 64 | | 69 |
| Sound pressure level | Heating | Nom. | dBA | | 48 | | 49 | | 51 | | 52 | | 51 | | 52 |
| | Cooling | Nom. | dBA | | 48 | | 49 | | 50 | | 52 | | 50 | | 54 |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | | | | | | | | |
| Current | Recommended fuses | A | | 16 | | | 20 | | | 40 | | | W1/3N~/50/400 | | |
| | | | | | | | | | | | | | 20 | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O



Floor standing air to water heat pump for heating, cooling and hot water with thermal solar support

- › Integrated solar unit, offering top comfort in heating, hot water and cooling
- › Maximum use of renewable energy: uses heat pump technology for heating and solar support for space heating and domestic hot water production
- › Fresh water principle: hygienic water, with no need for thermal legionella disinfection
- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no loss of water through safety valve
- › Solar support of domestic hot water with pressureless (drain-back) solar system
- › Intelligent Heat Store management: continuous heating during defrost mode, and use of stored heat for space heating
- › Heat loss is reduced to a minimum thanks to the high quality insulation
- › App control possible for managing heating, hot water and cooling operation
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump



| Efficiency data | | EHSX + ERLQ-C | | 04P30B + 004CV3 | 08P50B + 006CV3 | 08P30B + 006CV3 | 08P30B + 008CV3 | 08P50B + 008CV3 | 16P50B + 011CV3 | 16P50B + 014CV3 | 16P50B + 016CV3 | 16P50B + 011CW1 | 16P50B + 014CW1 | 16P50B + 016CW1 | |
|----------------------------|-----------------------------------|--|--|---------------------------------------|---------------------------------------|-----------------|---------------------------------------|-----------------|---|---|--|---|---|------------------------------|-------------|
| Heating capacity | Nom. | kW | | 4.26(1) / 3.47(2) / 4.53(3) / 3.98(4) | 5.14(1) / 4.60(2) / 6.06(3) / 5.78(4) | | 5.53(1) / 5.51(2) / 7.78(3) / 7.27(4) | | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 14.81(1) / 13.73(2) / 8.28(3) / 9.57(4) | 15.34(1) / 14.86(2) / 8.04(3) / 10.05(4) | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 8.28(1) / 9.57(2) / 14.81(3) / 13.73(4) | 8.04 / 10.05 / 15.34 / 14.86 | |
| Cooling capacity | Nom. | kW | | 4.4(1) / 4.0(2) | 5.2(1) / 4.6(2) | | | | 15.1(1) / 11.7(2) | 16.1(1) / 12.6(2) | 16.8(1) / 13.1(2) | 15.1(1) / 11.7(2) | 16.1(1) / 12.6(2) | 16.8 / 13.1 | |
| Power input | Heating | Nom. | kW | 0.87(1) / 1.04(2) / 1.49(3) / 0.85(4) | 1.30(1) / 1.58(2) / 1.88(3) / 1.26(4) | | 1.69(1) / 2.04(2) / 1.98(3) / 1.56(4) | | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 3.42(1) / 3.17(3) / 4.07(2) / 2.93(4) | | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 3.42(1) / 4.07(2) / 3.17(3) / 2.93(4) | 3.42 / 4.07 / 3.17 / 2.93 | |
| | Cooling | Nom. | kW | 1.05(1) / 1.41(2) | 1.43(1) / 1.85(2) | | | | 4.55(1) / 4.30(2) | 5.44(1) / 5.10(2) | 6.18(1) / 5.72(2) | | 4.55(1) / 4.30(2) | 5.44(1) / 5.10(2) | 6.18 / 5.72 |
| COP | | | | 5.23(1) / 3.84(2) / 2.85(3) / 4.07(4) | 4.65(1) / 3.66(2) / 2.73(3) / 3.64(4) | | 4.60(1) / 3.57(2) / 2.78(3) / 3.54(4) | | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10(1) / 3.22(2) / 2.44(3) / 3.15(4) | 4.38(1) / 3.32(2) / 2.45(3) / 3.29(4) | 4.27(1) / 3.34(2) / 2.58(3) / 3.22(4) | 4.10 / 3.22 / 2.44 / 3.15 | |
| EER | | | | 4.21(1) / 2.85(2) | 3.65(1) / 2.51(2) | | | | 3.32(1) / 2.72(2) | 2.96(1) / 2.47(2) | 2.72(1) / 2.29(2) | | 3.32(1) / 2.72(2) | 2.96(1) / 2.47(2) | 2.72 / 2.29 |
| Space heating | Average climate water outlet 55°C | General | η _s (Seasonal space heating efficiency) Seasonal space heating eff. class | 132 | 126 | | | 128 | | | A++ | | | | |
| Domestic hot water heating | General Average climate | Declared load profile η _{wh} (water heating efficiency) Water heating energy efficiency class | | L 103 | XL 102 | L 98 | L 90 | 96 | XL 83 | | | | | A | |

| Indoor Unit | | EHSX | | 04P30B | 08P50B | 08P30B | 08P30B | 08P50B | 16P50B | 16P50B | 16P50B | 16P50B | 16P50B | 16P50B |
|----------------------|--------------|---|-----------|---------------|---------------|---------------|--------|---------------|--------|--------|-----------------------|---------------|-----------------------|-----------------------|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,890x615x595 | 1,890x790x790 | 1,890x615x595 | | 1,890x790x790 | | | 1,945 / 1,890x790x790 | 1,890x790x790 | 1,945 / 1,890x790x790 | 1,945 / 1,890x790x790 |
| Weight | Unit | kg | | 84 | 111 | 84 | | 111 | | | 116 | 113 | 116 | 113 |
| Tank | Water volume | l | | 294 | 477 | 294 | | | | | 477 | | | |
| Operation range | Heating | Ambient | Min.~Max. | -25~25 | | | | | | 85 | | -25~35 | | |
| | | Water side | Min.~Max. | | | | | | | 15~55 | | | | |
| | Cooling | Ambient | Min.~Max. | | | | 10~43 | | | 15~55 | | -25~35 | | |
| | | Water side | Min.~Max. | | | | 5~22 | | | | | -25~35 | | |
| Domestic hot water | Ambient | Min.~Max. | °CDB | | | | | -25~35 | | | | | | |
| | Water side | Min.~Max. | °C | | | | | 25~55 | | | | | | |
| Sound power level | Nom. | dBA | | | | | 40 | | | | | | | |
| Sound pressure level | Nom. | dBA | | | | | 28 | | | | | | | |


| Outdoor Unit | | ERLQ-C | | 004CV3 | 006CV3 | 006CV3 | 008CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | |
|----------------------|------------------------------|---------------------|------|--------------------------------------|--------|--------|--------|--------|---------------------------------------|--------|--------|--------|--------|--------|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | | 1,345x900x320 | | | | | | |
| Weight | Unit | kg | | 54 | 56 | | | 113 | | | 114 | | | | |
| Compressor | Quantity | | | 1 | | | | | 1 | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | Hermetically sealed swing compressor | | | | | Hermetically sealed scroll compressor | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | 10.0~43.0 | | | | | 10.0~46.0 | | | | | | |
| Refrigerant | Type | | | -25~35 | | | | | -20~35 | | | | | | |
| | GWP | | | R-410A | | | | | R-410A | | | | | | |
| | Charge | kg | | 2,087.5 | | | | | 2,087.5 | | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | | | | | 3.1 | | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | | 62 | | | 64 | | 66 | | 66 | |
| | Cooling | Nom. | dBA | 63 | | | 64 | | | 66 | | 69 | | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | | 49 | | | 51 | | 52 | | 52 | |
| | Cooling | Nom. | dBA | 48 | | | 49 | | | 50 | | 52 | | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | | W1/3N~/50/400 | | | | | | |
| Current | Recommended fuses | A | | 16 | | | 20 | | | 40 | | 20 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/-8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split integrated ECH₂O

Floor standing air to water heat pump for bivalent heating, cooling and hot water with thermal solar support

> Bivalent system: combinable with a secondary heat source



Options

| Type | Material name |
|---|---------------|
| Room thermostat RoCon U1 | EHS157034 |
| Gateway RoCon G1 for apps | EHS157056 |
| Connection kit for MK1 | VMK1 |
| Back-up heater 1kW | EKBU1C |
| Back-up heater 3kW | EKBU3C |
| Back-up heater 9kW | EKBU9C |
| Heat insulation for hydraulic separator (HWC) | WHWC |
| Separator for dirt | SAS1 |
| Separator - hydraulic | HWC |
| External sensor | EKRTETS |
| Outdoor sensor for Rocon Controller | RoCon OT1 |
| Mixer module RoCon M1 | EHS157068 |
| Low sound cover for ERLQ-CV3 | EKLN-A |



| Efficiency data | | EHSXB + ERLQ-C | | 04P30B + 004CV3 | 08P30B + 006CV3 | 08P50B + 006CV3 | 08P30B + 008CV3 | 08P50B + 008CV3 | 16P50B + 011CV3 | 16P50B + 014CV3 | 16P50B + 016CV3 | 16P50B + 011CW1 | 16P50B + 014CW1 | 16P50B + 016CW1 | |
|----------------------------|-----------------------------------|---------------------------------------|--|---|---------------------------------------|-------------------|---------------------------------------|-------------------|---|---|---|---|---|----------------------------------|--|
| Heating capacity | Nom. | kW | | 4.26(1) / 3.47(2) / 4.53(3) / 3.98(4) | 5.14(1) / 4.60(2) / 6.06(3) / 5.78(4) | | 5.53(1) / 5.51(2) / 7.78(3) / 7.27(4) | | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 14.81(1) / 13.73(2) / 8.28(3) / 9.57(4) | 15.34(1) / 14.86(2) / 8.04(3) / 10.05(4) | 5.95(1) / 7.74(2) / 11.80(3) / 10.40(4) | 8.28(1) / 9.57(2) / 14.81(3) / 13.73(4) | 8.04 / 10.05 / 15.34 / 14.86 | |
| Cooling capacity | Nom. | kW | | 4.4(1) / 4.0(2) | | 5.2(1) / 4.6(2) | | 11.7(2) / 15.1(1) | | 12.6(2) / 16.1(1) | 13.1(2) / 16.8(1) | 11.7(2) / 15.1(1) | 12.6(2) / 16.1(1) | 16.8 / 13.1 | |
| Power input | Heating | Nom. | kW | 0.87(1) / 1.04(2) / 1.49(3) / 0.85(4) | 1.30(1) / 1.58(2) / 1.88(3) / 1.26(4) | | 1.69(1) / 2.04(2) / 1.98(3) / 1.56(4) | | 2.57 / 3.13 / 2.43 / 2.35 | 3.42(1) / 4.07(2) / 2.93(4) | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 2.57(1) / 3.13(2) / 2.43(3) / 2.35(4) | 3.42(1) / 4.07(2) / 3.17(3) / 2.93(4) | 3.42 / 4.07 / 3.17 / 2.93 | |
| | Cooling | Nom. | kW | 1.05(1) / 1.41(2) / 3.84(2) / 2.85(3) / 4.07(4) | 1.43(1) / 1.85(2) | | 4.60(1) / 3.57(2) / 2.78(3) / 3.54(4) | | 4.55(1) / 4.30(2) / 3.32(2) / 2.45(3) / 3.29(4) | 5.44(1) / 5.10(2) / 3.34(2) / 2.58(3) / 3.22(4) | 6.18(1) / 5.72(2) / 3.22(2) / 2.44(3) / 3.15(4) | 4.55(1) / 4.30(2) / 3.32(2) / 2.45(3) / 3.29(4) | 5.44(1) / 5.10(2) / 3.34(2) / 2.58(3) / 3.22(4) | 6.18 / 5.72 / 4.10 / 3.22 / 3.15 | |
| EER | | | % | 4.21(1) / 2.85(2) | | 3.65(1) / 2.51(2) | | 128 | | 130 | 127 | 128 | 130 | 127 | |
| Space heating | Average climate water outlet 55°C | General | η _s (Seasonal space heating efficiency) | 132 | | 126 | | 128 | | 130 | 127 | 128 | 130 | 127 | |
| Domestic hot water heating | Average climate | General | Declared load profile | L | | XL | | L | | XL | | L | | XL | |
| | | Water heating energy efficiency class | η _{wh} (water heating efficiency) | 103 | | 98 | | 108 | | 90 | | 99 | | 84 | |
| | | | Water heating energy efficiency class | A | | | | | | | | | | | |

| Indoor Unit | | EHSXB | | | | | | | | | | | |
|----------------------|---------------------------|---|-----------|---------------|--|---------------|--------|---------------|--|---------------|--|---------------|--|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | 1,890x615x595 | | 1,890x790x790 | | 1,890x615x595 | | 1,890x790x790 | | 1,890x790x790 | |
| | Unit | kg | | 89 | | 116 | | 89 | | 116 | | 118 | |
| Tank | Water volume | l | | 294 | | 477 | | 294 | | 477 | | 477 | |
| | Maximum water temperature | °C | | | | | | 85 | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | -25~25 | | | | | | -25~35 | |
| | | Water side | Min.~Max. | °C | | | | 15~55 | | | | | |
| | Cooling | Ambient | Min.~Max. | °CDB | | | | 10~43 | | | | | |
| | | Water side | Min.~Max. | °C | | 5~22 | | | | | | | |
| Domestic hot water | Ambient | Min.~Max. | °CDB | | | | -25~35 | | | | | | |
| | Water side | Min.~Max. | °C | | | | 25~55 | | | | | | |
| Sound power level | Nom. | dBA | | 40 | | | | 40 | | | | | |
| Sound pressure level | Nom. | dBA | | 28 | | | | 28 | | | | | |

| Outdoor Unit | | ERLQ-C | | | | | | | | | | | | |
|----------------------|------------------------------|--------------------|------|--------------------------------------|-----------|---------------------------------------|-----------|---------------------------------------|-----------|---------------------------------------|-----------|---------------------------------------|----|--|
| Dimensions | Unit | HeightxWidthxDepth | | mm | | 735x832x307 | | | | 1,345x900x320 | | | | |
| Weight | Unit | kg | | 54 | | 56 | | | | 113 | | 114 | | |
| Compressor | Quantity | | | 1 | | 1 | | 1 | | 1 | | 1 | | |
| | Type | | | Hermetically sealed swing compressor | | Hermetically sealed scroll compressor | | Hermetically sealed scroll compressor | | Hermetically sealed scroll compressor | | Hermetically sealed scroll compressor | | |
| Operation range | Cooling | Min.~Max. | °CDB | | 10.0~43.0 | | 10.0~46.0 | | 10.0~46.0 | | 10.0~46.0 | | | |
| | Domestic hot water | Min.~Max. | °CDB | | -25 ~35 | | -25 ~35 | | -20 ~35 | | -20 ~35 | | | |
| Refrigerant | Type | | | R-410A | | R-410A | | R-410A | | R-410A | | R-410A | | |
| | GWP | | | 2,087.5 | | 2,087.5 | | 2,087.5 | | 2,087.5 | | 2,087.5 | | |
| Charge | kg | 1.5 | | 1.6 | | 1.6 | | 3.4 | | 3.4 | | 3.4 | | |
| | TCO ₂ Eq | 3.1 | | 3.3 | | 3.3 | | 7.1 | | 7.1 | | 7.1 | | |
| Control | | | | Expansion valve (electronic type) | | Expansion valve (electronic type) | | Expansion valve (electronic type) | | Expansion valve (electronic type) | | Expansion valve (electronic type) | | |
| Sound power level | Heating | Nom. | dBA | | 61 | | 62 | | 64 | | 66 | | 66 | |
| | Cooling | Nom. | dBA | | 63 | | 63 | | 64 | | 66 | | 69 | |
| Sound pressure level | Heating | Nom. | dBA | | 48 | | 49 | | 51 | | 52 | | 52 | |
| | Cooling | Nom. | dBA | | 48 | | 49 | | 50 | | 52 | | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | V3/1~/50/230 | | V3/1~/50/230 | | V3/1~/50/230 | | W1/3N~/50/400 | | |
| | Current | A | | 16 | | 20 | | 40 | | 40 | | 20 | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) EW 30°C; LW 35°C; ambient conditions: -7°CDB/8°CWB (4) EW 30°C; LW 35°C; ambient conditions: 2°CDB/1°CWB (5) Contains fluorinated greenhouse gases

R-410A




Daikin Altherma R W low temperature split wall mounted unit

The Daikin Altherma low temperature split wall mounted unit offers heating and cooling with high flexibility for a quick and easy installation, with an optional connection to deliver domestic hot water

High flexibility for installation and domestic hot water connection

- › Inclusion of all hydraulic components means no third-party components are required
- › PCB board and hydraulic components are located in the front for easy access
- › Compact dimensions allows for small installation space, as almost no side clearances are required
- › The unit's sleek design blends in with other household appliances
- › Combine with a stainless steel, enameled or **ECH₂O** thermal store

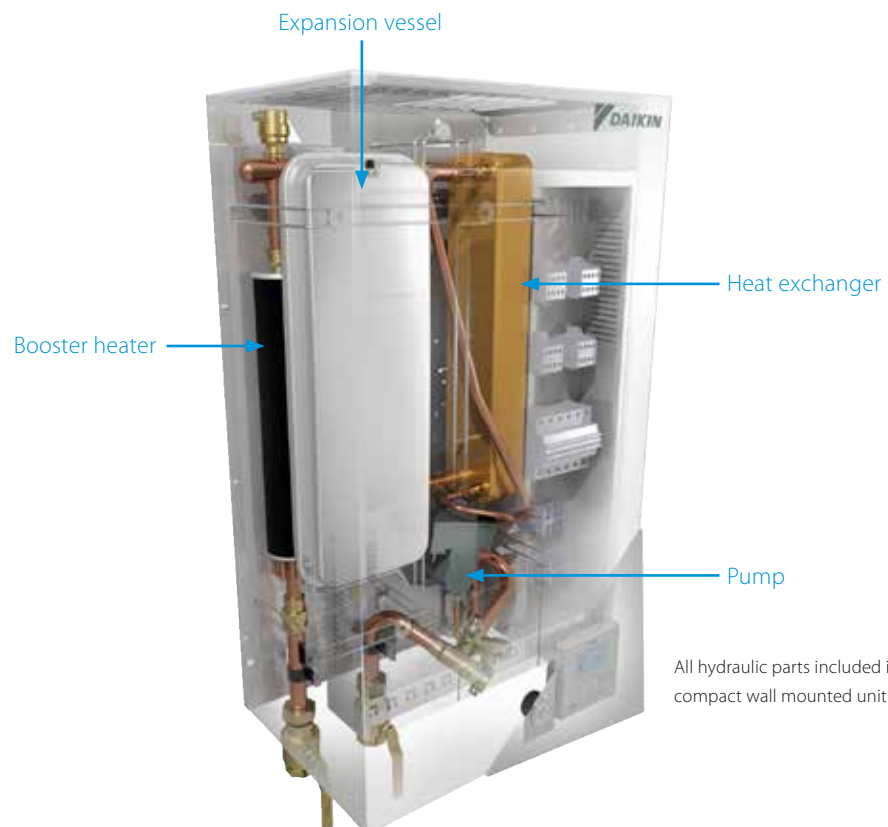



Stainless steel and enameled tanks

If the end user only requires hot water and installation height is limited, a separate tank can be connected (either stainless steel or enameled).

ECH₂O thermal store range: additional hot water comfort

Combine your wall mounted unit with a thermal store for additional hot water comfort.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options

Built for small and large homes, customers can choose between a pressureless and pressurised hot water system.



Stainless steel tank



Wall mounted unit combined with ECH₂O thermal store

Daikin Altherma low temperature split wall mounted unit

Wall mounted **heating only** air to water heat pump ideal for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHBH + ERLQ-C | | 04CB3V + 004CV3 | 08CB3V/9W + 006CV3 | 08CB9W/3V + 008CV3 | 11CB3V/B9W + 011CV3 | 16CB3V/9W + 014CV3 | 16CB3V/9W + 016CV3 | 11CB3V/9W + 011CW1 | 16CB3V/9W + 014CW1 | 16CB3V/9W + 016CW1 | | | | | | | | |
|----------------------|-----------------------------------|--------------------------------------|--|---------------|------|---------------------|--------------------|---------------------------------------|---|---|---|---|---|---|--------|--------|--------|--------|--------|--------|--------|--------|
| Heating capacity | Nom. | | | kW | | 4.40 (1) / 4.03(2) | 6.00 (1) / 5.67(2) | 7.40 (1) / 6.89(2) | 11.2 (1) / 11.0(2) | 14.5 (1) / 13.6(2) | 16.0 (1) / 15.2(2) | 11.2 (1) / 11.0(2) | 14.5 (1) / 13.6(2) | 16.0 (1) / 15.2(2) | | | | | | | | |
| Power input | Heating | Nom. | | kW | | 0.870 (1) / 1.13(2) | 1.27 (1) / 1.59(2) | 1.66 (1) / 2.01(2) | 2.43 (1) / 3.10(2) | 3.37 (1) / 4.10(2) | 3.76 (1) / 4.66(2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10(2) | 3.76 (1) / 4.66(2) | | | | | | | | |
| COP | | | | | | 5.04 (1) / 3.58(2) | 4.74 (1) / 3.56(2) | 4.45 (1) / 3.42(2) | 4.60 (1) / 2.75(2) / 3.55 (3) / 2.10(4) | 4.30 (1) / 2.65(2) / 3.32 (3) / 2.08(4) | 4.25 (1) / 2.65(2) / 3.26 (3) / 2.09(4) | 4.60 (1) / 2.75(2) / 3.55 (3) / 2.10(4) | 4.30 (1) / 2.65(2) / 3.32 (3) / 2.08(4) | 4.25 (1) / 2.64(2) / 3.26 (3) / 2.09(4) | | | | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.20 | 3.22 | 3.20 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | | | | | | | | |
| | | | ηs (Seasonal space heating efficiency) | 125 | 126 | 125 | 120 | 123 | 119 | 120 | 123 | 119 | 120 | 123 | | | | | | | | |
| | Average climate water outlet 35°C | General | SCOP | 4.52 | 4.29 | 4.34 | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | | | | | | | | |
| | | | ηs (Seasonal space heating efficiency) | 178 | 169 | 171 | 156 | 153 | 149 | 156 | 153 | 149 | 156 | 153 | | | | | | | | |
| | | | | | | A++ | | | A+ | | | | | | | | | | | | | |
| | | | | | | A++ | | | A+ | | A++ | | A+ | | | | | | | | | |
| Indoor Unit | | | | EHBH | | 04CB3V | 08CB3V/9W | 08CB9W/3V | 11CB3V/9W | 16CB3V/9W | 16CB3V/9W | 11CB3V/9W | 16CB3V/9W | 16CB3V/9W | | | | | | | | |
| Casing | Colour | White | | | | | | | | | | | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | 890x480x344 | | | | | | | | | | | | | | | | | | | |
| Weight | Unit | kg | | | | | | | | | | | | | | | | | | | | |
| Operation range | Heating | Water side Min.~Max. | °C | | | | | | | | | | | | | | | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | | | | | | | | | | | | | | | | | | | |
| Sound power level | Nom. | dBA | | 40.0 | | | 41.0 | | 44.0 | | 41.0 | | 44.0 | | | | | | | | | |
| Sound pressure level | Nom. | dBA | | 26.0 | | | 27.0 | | 30.0 | | 27.0 | | 30.0 | | | | | | | | | |
| Outdoor Unit | | | | ERLQ-C | | 004CV3 | 006CV3 | 006CV3 | 008CV3 | 008CV3 | 011CV3 | 011CV3 | 014CV3 | 014CV3 | 016CV3 | 016CV3 | 011CW1 | 011CW1 | 014CW1 | 014CW1 | 016CW1 | 016CW1 |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | | | | | | | | | | | | | | |
| Weight | Unit | kg | | | | | | | | | | | | | | | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | | | | | | | | | | | | | |
| | Type | Hermetically sealed swing compressor | | | | | | Hermetically sealed scroll compressor | | | | | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | | | | | | | | | | | | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | | | | | | | | | | | | | | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | | | | | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | | | | | | | | | | | | | |
| | Charge | kg | 1.5 | | | 1.6 | | | 3.4 | | | 3.4 | | | | | | | | | | |
| | Charge | TCO ₂ Eq | 3.1 | | | 3.3 | | | 7.1 | | | 7.1 | | | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | | 61 | | 62 | | 64 | | 64 | | 66 | | 64 | | 66 | | | | | |
| | Cooling | Nom. | dBA | | 63 | | | 64 | | 66 | | 69 | | 64 | | 66 | | | | | | |
| Sound pressure level | Heating | Nom. | dBA | | 48 | | 49 | | 51 | | 52 | | 51 | | 52 | | | | | | | |
| | Cooling | Nom. | dBA | | 48 | | 49 | | 50 | | 52 | | 50 | | 52 | | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | | | | | | | | | | | | | | | | | | | |
| Current | Recommended fuses | A | | | | | | | | | | | | | | | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split wall mounted unit

Wall mounted **heating only** air to water heat pump ideal for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Heat pumps

| Efficiency data | | | | EBBH + ERHQ-B | | 11CB3V + 011BV3 | 11CB9W + 011BV3 | 16CB3V + 014BV3 | 16CB9W + 014BV3 | 16CB3V + 016BV3 | 16CB9W + 016BV3 | 11CB3V + 011BW1 | 11CB9W + 011BW1 | 16CB3V + 014BW17 | 16CB9W + 014BW17 | 16CB3V + 016BW1 | 16CB9W + 016BW1 | |
|------------------|-----------------------------------|---------|--|---------------|-----|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|------|
| Heating capacity | Nom. | | kW | | | 11.2 (1) / 10.3(2) | 14.0 (1) / 13.1(2) | 14.0 (1) / 13.1(2) | 16.0 (1) / 15.2(2) | 16.0 (1) / 15.2(2) | 11.3 (1) / 11.0(2) | 14.5 (1) / 13.6(2) | 14.5 (1) / 13.6(2) | 16.1 (1) / 15.1(2) | 16.1 (1) / 15.1(2) | 16.1 (1) / 15.1(2) | 16.1 (1) / 15.1(2) | |
| Power input | Heating | Nom. | kW | | | 2.55 (1) / 3.17(2) | 3.26 (1) / 4.04(2) | 3.26 (1) / 4.04(2) | 3.92 (1) / 4.75(2) | 3.92 (1) / 4.75(2) | 2.63 (1) / 3.24(2) | 3.42 (1) / 4.21(2) | 3.42 (1) / 4.21(2) | 3.82 (1) / 4.69(2) | 3.82 (1) / 4.69(2) | 3.82 (1) / 4.69(2) | 3.82 (1) / 4.69(2) | |
| COP | | | | | | 4.39 (1) / 3.25(2) | 4.29 (1) / 3.24(2) | 4.29 (1) / 3.24(2) | 4.08 (1) / 3.20(2) | 4.08 (1) / 3.20(2) | 4.30 (1) / 3.39(2) | 4.24 (1) / 3.22(2) | 4.24 (1) / 3.22(2) | 4.20 (1) / 3.22(2) | 4.20 (1) / 3.22(2) | 4.20 (1) / 3.22(2) | 4.20 (1) / 3.22(2) | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | | 2.86 | 2.82 | 2.82 | 2.92 | 2.92 | 2.90 | 2.86 | 2.86 | 2.96 | 2.96 | 2.96 | 2.96 | |
| | | | ηs (Seasonal space heating efficiency) | % | 112 | 110 | 110 | 114 | 114 | 113 | 111 | 111 | 115 | 115 | 115 | 115 | 115 | |
| | Average climate water outlet 35°C | General | SCOP | | | 2.99 | 3.23 | 3.23 | 3.29 | 3.29 | 3.08 | 3.34 | 3.34 | 3.33 | 3.33 | 3.33 | 3.33 | 3.33 |
| | | | ηs (Seasonal space heating efficiency) | % | 117 | 126 | 126 | 129 | 129 | 120 | 131 | 131 | 130 | 130 | 130 | 130 | 130 | 130 |
| | | | Seasonal space heating eff. class | | | A | A+ | A+ | A+ | A | A+ | A+ | A+ | A+ | A+ | A+ | A+ | |

| Indoor Unit | | | | EBBH | 11CB3V | 11CB9W | 16CB3V | 16CB9W | 16CB3V | 16CB9W | 11CB3V | 11CB9W | 16CB3V | 16CB9W | 16CB3V | 16CB9W |
|----------------------|--------------------|--------------------|-----------|-----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Casing | Colour | | | White | | | | | | | | | | | | |
| | Material | | | Precoated sheet metal | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 890x480x344 | | | | | | | | | | | | |
| Weight | Unit | | | 43.0 | 44.0 | 45.0 | 44.0 | 45.0 | 43.0 | 44.0 | 45.0 | 44.0 | 45.0 | 44.0 | 45.0 | |
| Operation range | Heating | Water side | Min.~Max. | 15 ~55.0 | | | | | | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | 25~80 | | | | | | | | | | | | |
| Sound power level | Nom. | | | 41.0 | | | 44.0 | | | 41.0 | | | 44.0 | | | |
| Sound pressure level | Nom. | | | 27.0 | | | 30.0 | | | 27.0 | | | 30.0 | | | |


| Outdoor Unit | | | | ERHQ-B | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 |
|----------------------|------------------------------|---------------------|--------------|---------------------------------------|--------|---------------|---------------|--------|---------|--------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | 1,345x900x320 | | | |
| Weight | Unit | | | 102 | | | 108 | | | |
| Compressor | Quantity | | | 1 | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | |
| | GWP | | | 2,087.5 | | | | | | |
| | Charge | kg | | 2.7 | | | 3.0 | | | |
| | Charge | TCO ₂ Eq | | 5.6 | | | 6.3 | | | |
| Sound power level | Heating | Nom. | dBa | 64 | | | 66 | | | |
| | Cooling | Nom. | dBa | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBa | 49 | 51 | 53 | 51 | 52 | 54 | |
| | Cooling | Nom. | dBa | 50 | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | V3/1~/50/230 | | | W1/3N~/50/400 | | | | |
| Current | Recommended fuses | A | 32 | | | 20 | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split wall mounted unit

Wall mounted **reversible** air to water heat pump ideal for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -25°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHBX + ERLQ-C | | 04CB3V / + 004CV3 | 08CB3V / 08CB9W + 006CV3 | 08CB3V / 08CB9W + 008CV3 | 11CB3V / 11CB9W + 011CV3 | 16CB3V / 16CB9W + 014CV3 | 16CB3V / 16CB9W + 016CV3 | 11CB3V / 11CB9W + 011CW1 | 16CB3V / 16CB9W + 014CW1 | 16CB3V / 16CB9W + 016CW1 | |
|------------------|-----------------------------------|---------|--|-----------------------------------|-------------------|-------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|--------------------------|--|
| Heating capacity | Nom. | | kW | 4.40(1) / 4.03(2) | 6.00(1) / 5.67(2) | 7.40(1) / 6.89(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | 16.0(1) / 15.2(2) | | |
| Cooling capacity | Nom. | | kW | 4.08(1) / 4.17(2) | 5.88(1) / 4.84(2) | 6.20(1) / 5.36(2) | 12.1(1) / 11.7(2) | 12.7(1) / 12.6(2) | 13.8(1) / 13.1(2) | 12.1(1) / 11.7(2) | 12.7(1) / 12.6(2) | 13.8(1) / 13.1(2) | 13.8(1) / 13.1(2) | | |
| Power input | Heating | Nom. | kW | 0.870(1) / 1.13(2) | 1.27(1) / 1.59(2) | 1.66(1) / 2.01(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | 3.76(1) / 4.66(2) | | |
| | Cooling | Nom. | kW | 0.900(1) / 1.80(2) | 1.51(1) / 2.07(2) | 1.64(1) / 2.34(2) | 3.05(1) / 4.31(2) | 3.21(1) / 5.08(2) | 3.74(1) / 5.73(2) | 3.05(1) / 4.31(2) | 3.21(1) / 5.08(2) | 3.74(1) / 5.73(2) | 3.74(1) / 5.73(2) | | |
| COP | | | | 5.04(1) / 3.58(2) | 4.74(1) / 3.56(2) | 4.45(1) / 3.42(2) | 4.60(1) / 2.75(2) / 3.55(3) / 2.10(4) | 4.30(1) / 2.65(2) / 3.32(3) / 2.08(4) | 4.25(1) / 2.64(2) / 3.26(3) / 2.09(4) | 4.60(1) / 2.75(2) / 3.55(3) / 2.10(4) | 4.30(1) / 2.65(2) / 3.32(3) / 2.08(4) | 4.25(1) / 2.64(2) / 3.26(3) / 2.09(4) | 4.25(1) / 2.64(2) / 3.26(3) / 2.09(4) | | |
| EER | | | | 4.55(1) / 2.32(2) | 3.89(1) / 2.34(2) | 3.79(1) / 2.29(2) | 3.98(1) / 2.72(2) | 3.96(1) / 2.47(2) | 3.69(1) / 2.29(2) | 3.98(1) / 2.72(2) | 3.96(1) / 2.47(2) | 3.69(1) / 2.29(2) | 3.69(1) / 2.29(2) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 3.20 | 3.22 | 3.20 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | 3.06 | | |
| | | | ηs (Seasonal space heating efficiency) | 125 | 126 | 125 | 120 | 123 | 119 | 120 | 123 | 119 | 119 | | |
| | Average climate water outlet 35°C | General | SCOP | 4.52 | 4.29 | 4.34 | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | 3.80 | | |
| | | | ηs (Seasonal space heating efficiency) | 178 | 169 | 171 | 156 | 153 | 149 | 156 | 153 | 149 | 149 | | |
| | | | | Seasonal space heating eff. class | | | | A++ | | | | A+ | | | |
| | | | | Seasonal space heating eff. class | | | | A++ | | | | A+ | | | |

| Indoor Unit | | | | EHBX | 04CB3V | 08CB3V/9W | 08CB3V/9W | 11CB3V/9W | 16CB3V/9W | 16CB3V/9W | 11CB3V/9W | 16CB3V/9W | 16CB3V/9W | | | | | |
|----------------------|------------------------------|-----------------------|-------------|--------------------------------------|--------|-----------|-----------|---------------------------------------|-----------|-----------|-----------|---------------|-----------|------|------|------|------|------|
| Casing | Colour | White | | | | | | | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | 890x480x344 | | | | | | | | | | | | | | | |
| Weight | Unit | | kg | 42.0 | 44.0 | 45.0 | 44.0 | 45.0 | 44.0 | 46.0 | 44.0 | 46.0 | 43.0 | 45.0 | 43.0 | 45.0 | 43.0 | 45.0 |
| Operation range | Heating | Water side | Min.~Max. | 15 ~55.0 | | | | | | | | | | | | | | |
| | Cooling | Water side | Min.~Max. | 5.00 ~22.0 | | | | | | | | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | 25~80 | | | | | | | | | | | | | | |
| Sound power level | Nom. | | dBA | 40.0 | | | | 41.0 | 44.0 | 44.0 | 41.0 | 41.0 | 41.0 | | | | | |
| Sound pressure level | Nom. | | dBA | 26.0 | | | | 27.0 | 30.0 | 30.0 | 27.0 | 27.0 | 27.0 | | | | | |
| Outdoor Unit | | | | ERLQ-C | 004CV3 | 006CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | 1,345x900x320 | | | | | | | | | | |
| Weight | Unit | | kg | 54 | 56 | | | 113 | | | 114 | | | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | | | | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | Hermetically sealed scroll compressor | | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | 10.0~46.0 | | | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | -20 ~35 | | | | | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | | | | | | |
| | Charge | kg | | 1.5 | 1.6 | | | 3.4 | | | | | | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | 3.3 | | | 7.1 | | | | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | 64 | | 64 | 66 | 64 | 64 | 66 | | | | | |
| | Cooling | Nom. | dBA | 63 | | | 64 | | 66 | 69 | 64 | 66 | 69 | | | | | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | 50 | | 51 | 52 | 51 | 52 | 52 | | | | | |
| | Cooling | Nom. | dBA | 48 | 49 | 50 | | 52 | 54 | 50 | 52 | 54 | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | | | W1/3N~/50/400 | | | | | | |
| Current | Recommended fuses | | A | 16 | | | 20 | | 40 | | | 20 | | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma lowtemperature split wall mounted unit

Wall mounted **reversible** air to water heat pump ideal for low energy houses

- › Wall mounted indoor unit
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Outdoor unit extracts heat from the outdoor air, even at -20°C
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



| Efficiency data | | | | EHBX + ERHQ-B | | 11CB9W + 011BV3 | 11CB3V + 011BV3 | 16CB3V + 014BV3 | 16CB9W + 014BV3 | 16CB9W + 016BV3 | 16CB3V + 016BV3 | 11CB9W + 011BW1 | 11CB3V + 011BW1 | 16CB9W + 014BW17 | 16CB3V + 014BW17 | 16CB3V + 016BW1 | 16CB9W + 016BW1 |
|-----------------------------------|-----------------------------------|--|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|-----------------|-----------------|
| Heating capacity | Nom. | | kW | 11.2(1) / 10.3(2) | 14.0(1) / 13.1(2) | 16.0(1) / 15.2(2) | 11.3(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.1(1) / 15.1(2) | | | | | | | | |
| Cooling capacity | Nom. | | kW | 13.9(1) / 10.0(2) | 17.3(1) / 12.5(2) | 17.8(1) / 13.1(2) | 15.1(1) / 11.7(2) | 16.1(1) / 12.6(2) | 16.8(1) / 13.1(2) | | | | | | | | |
| Power input | Heating | Nom. | kW | 2.55(1) / 3.17(2) | 3.26(1) / 4.04(2) | 3.92(1) / 4.75(2) | 2.63(1) / 3.24(2) | 3.42(1) / 4.21(2) | 3.82(1) / 4.69(2) | | | | | | | | |
| | Cooling | Nom. | kW | 3.86(1) / 3.69(2) | 5.86(1) / 5.69(2) | 6.87(1) / 5.95(2) | 4.53(1) / 4.31(2) | 5.43(1) / 5.08(2) | 6.16(1) / 5.73(2) | | | | | | | | |
| COP | | | | 4.39(1) / 3.25(2) | 4.29(1) / 3.24(2) | 4.08(1) / 3.20(2) | 4.30(1) / 3.39(2) | 4.24(1) / 3.22(2) | 4.20(1) / 3.22(2) | | | | | | | | |
| EER | | | | 3.60(1) / 2.71(2) | 2.95(1) / 2.32(2) | 2.59(1) / 2.20(2) | 3.32(1) / 2.72(2) | 2.96(1) / 2.47(2) | 2.72(1) / 2.29(2) | | | | | | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | 2.82 | 2.92 | 2.90 | 2.86 | 2.96 | | | | | | | | |
| | | | ηs (Seasonal space heating efficiency) | % | 112 | 110 | 114 | 113 | 111 | 115 | | | | | | | |
| | | | | A+ | | | | | | | | | | | | | |
| | General | SCOP | 2.99 | 3.23 | 3.29 | 3.08 | 3.34 | 3.33 | | | | | | | | | |
| Average climate water outlet 35°C | General | ηs (Seasonal space heating efficiency) | % | 117 | 126 | 129 | 120 | 131 | 130 | | | | | | | | |
| | | | | | A | | A+ | | A | | A+ | | | | | | |

| Indoor Unit | | | | EHBX | 11CB9W | 11CB3V | 16CB3V | 16CB9W | 16CB3V | 11CB9W | 11CB3V | 16CB9W | 16CB3V | 16CB9W |
|----------------------|--------------------|-----------------------|-------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Casing | Colour | White | | | | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 890x480x344 | | | | | | | | | | |
| Weight | Unit | | kg | 45.0 | 43.0 | 44.0 | 46.0 | 44.0 | 45.0 | 43.0 | 46.0 | 44.0 | 46.0 | |
| Operation range | Heating | Water side Min.~Max. | °C | 15 ~55.0 | | | | | | | | | | |
| | Cooling | Water side Min.~Max. | °C | 5.00 ~22.0 | | | | | | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | 25~80 | | | | | | | | | | |
| Sound power level | Nom. | | dB(A) | 41.0 | | | 44.0 | | | 41.0 | | | 44.0 | |
| Sound pressure level | Nom. | | dB(A) | 27.0 | | | 30.0 | | | 27.0 | | | 30.0 | |

| Outdoor Unit | | | | ERHQ-B | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 | | |
|----------------------|------------------------------|---------------------|-------|---------------------------------------|--------|--------|---------------|---------------|---------|--------|----|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | 1,345x900x320 | | | | | |
| Weight | Unit | | kg | 102 | | | 108 | | | | | |
| Compressor | Quantity | | | 1 | | | | | | | | |
| | Type | | | Hermetically sealed scroll compressor | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | |
| | Charge | kg | | 2.7 | | | 3.0 | | | | | |
| | Charge | TCO ₂ Eq | | 5.6 | | | 6.3 | | | | | |
| Sound power level | Heating | Nom. | dB(A) | 64 | | | 66 | | 64 | | 66 | |
| | Cooling | Nom. | dB(A) | 64 | 66 | 69 | 64 | 66 | 69 | | | |
| Sound pressure level | Heating | Nom. | dB(A) | 49 | 51 | 53 | 51 | | 52 | | 54 | |
| | Cooling | Nom. | dB(A) | 50 | 52 | 54 | 50 | 52 | 54 | | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | | V3/1~/50/230 | | | | W1/3N~/50/400 | | | | |
| Current | Recommended fuses | A | | 32 | | | 20 | | | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); Heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split wall mounted unit without back-up heater

Wall mounted **heating only** air to water heat pump
without back-up heater

- > Energy efficient heating only system without back-up heater
- > Perfect fit for new built as well as for low energy houses
- > Best seasonal efficiencies, providing the highest savings on running costs
- > Flexible configuration with respect to heat emitters
- > Possible to combine with domestic hot water
- > Online controller (optional)
- > Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



011-1W0068 →78



| Efficiency data | | | | EHBH + ERLQ-C | 04CBV + 004CV3 | 08CBV + 006CV3 | 08CBV + 008CV3 | 11CBV + 011CV3 | 16CBV + 014CV3 | 16CBV + 016CV3 | 11CBV + 011CW1 | 16CBV + 014CW1 | 16CBV + 016CW1 |
|------------------|-----------------------------------|---------|-----------------------------------|---------------|--------------------|-------------------|-------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Heating capacity | Nom. | | kW | | 4.40(1) / 4.03(2) | 6.00(1) / 5.67(2) | 7.40(1) / 6.89(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) | 11.2(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.0(1) / 15.2(2) |
| Power input | Heating | Nom. | kW | | 0.870(1) / 1.13(2) | 1.27(1) / 1.59(2) | 1.66(1) / 2.01(2) | 2.43(1) / 3.10(2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) | 2.43 (1) / 3.10 (2) | 3.37(1) / 4.10(2) | 3.76(1) / 4.66(2) |
| COP | | | | | 5.04(1) / 3.58(2) | 4.74(1) / 3.56(2) | 4.45(1) / 3.42(2) | 4.60(1) / 2.75(2) / 3.55(3) / 2.10(4) | 4.30(1) / 2.65(2) / 3.32(3) / 2.08(4) | 4.25(1) / 2.64(2) / 3.26(3) / 2.09(4) | 4.60(1) / 2.75(2) / 3.55(3) / 2.10(4) | 4.30(1) / 2.65(2) / 3.32(3) / 2.08(4) | 4.25(1) / 2.64(2) / 3.26(3) / 2.09(4) |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.20 | 3.22 | 3.20 | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 |
| | | | % | 125 | 126 | 125 | 120 | 123 | 119 | 120 | 123 | 119 | |
| | Average climate water outlet 35°C | General | SCOP | | 4.52 | 4.29 | 4.34 | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 |
| | | | % | 178 | 169 | 171 | 156 | 153 | 149 | 156 | 153 | 149 | |
| | | | Seasonal space heating eff. class | | A++ | | | A+ | | | | | |
| | | | Seasonal space heating eff. class | | A++ | | | A+ | | A++ | | A+ | |

| Indoor Unit | | | | EHBH | 04CBV | 08CBV | 08CBV | 11CBV | 16CBV | 16CBV | 11CBV | 16CBV | 16CBV |
|----------------------|--------------------|----------------------|-----|-----------------------|-------|-------|-------|----------|-------|-------|-------|-------|-------|
| Casing | Colour | | | White | | | | | | | | | |
| | Material | | | Precoated sheet metal | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 890x480x344 | | | | | | | | | |
| Weight | Unit | | kg | 39.0 | 41.0 | | | 42.0 | | 41.0 | | 42.0 | |
| Operation range | Heating | Water side Min.~Max. | °C | 10 ~55.0 | | | | 10 ~55.0 | | | | | |
| | Domestic hot water | Water side Min.~Max. | °C | 25~80 | | | | | | | | | |
| Sound power level | Nom. | | dBA | 40.0 | | | 41.0 | 44.0 | | 41.0 | 44.0 | | |
| Sound pressure level | Nom. | | dBA | 26.0 | | | 27.0 | 30.0 | | 27.0 | 30.0 | | |

| Outdoor Unit | | | | ERLQ-C/ERLQ | 004CV3 | 006CV3 | 008CV3 | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 |
|----------------------|------------------------------|---------------------|------|--------------------------------------|--------|--------|--------|---------------------------------------|---------------|--------|--------|---------------|--------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 735x832x307 | | | | | 1,345x900x320 | | | | |
| Weight | Unit | | kg | 54 | 56 | | | 113 | | 114 | | | |
| Compressor | Quantity | | | 1 | | | | | | | | | |
| | Type | | | Hermetically sealed swing compressor | | | | Hermetically sealed scroll compressor | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~43.0 | | | | 10.0~46.0 | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -25 ~35 | | | | -20 ~35 | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | | | | |
| | GWP | | | 2,087.5 | | | | | | | | | |
| | Charge | kg | | 1.5 | 1.6 | | | 3.4 | | | | | |
| | Charge | TCO ₂ Eq | | 3.1 | 3.3 | | | 7.1 | | | | | |
| Sound power level | Heating | Nom. | dBA | 61 | | 62 | 64 | | 66 | 64 | | 66 | |
| | Cooling | Nom. | dBA | 63 | | | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 48 | | 49 | 51 | | 52 | 51 | | 52 | |
| | Cooling | Nom. | dBA | 48 | 49 | 50 | | 52 | 54 | 50 | 52 | 54 | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | V3/1~/50/230 | | | | | | | | W1/3N~/50/400 | |
| Current | Recommended fuses | | A | 16 | | | 20 | 40 | | 20 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) (3) Heating Ta DB -7°C (RH85%) - LWC 35°C (4) Heating Ta DB -7°C (RH85%) - LWC 45°C (5) Contains fluorinated greenhouse gases

Daikin Altherma low temperature split without back-up heater

Wall mounted **heating only** air to water heat pump
without back-up heater

- › Energy efficient heating only system without back-up heater
- › Perfect fit for new built as well as for low energy houses
- › Best seasonal efficiencies, providing the highest savings on running costs
- › Flexible configuration with respect to heat emitters
- › Possible to combine with domestic hot water
- › Online controller (optional)
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)










up to **R-410A**

Heat pumps

| Efficiency data | | | | EBBH + ERHQ-B | 11CBV + 011BV3 | 16CBV + 014BV3 | 16CBV + 016BV3 | 11CBV + 011BW1 | 16CBV + 014BW17 | 16CBV + 016BW1 | |
|-----------------------------------|-----------------------------------|--|--|-----------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|----------------|-----|
| Heating capacity | Nom. | | kW | 11.2(1) / 10.3(2) | 14.0(1) / 13.1(2) | 16.0(1) / 15.2(2) | 11.3(1) / 11.0(2) | 14.5(1) / 13.6(2) | 16.1(1) / 15.1(2) | | |
| Power input | Heating | Nom. | kW | 2.55(1) / 3.17(2) | 3.26(1) / 4.04(2) | 3.92(1) / 4.75(2) | 2.63(1) / 3.24(2) | 3.42(1) / 4.21(2) | 3.82(1) / 4.69(2) | | |
| COP | | | | 4.39(1) / 3.25(2) | 4.29(1) / 3.24(2) | 4.08(1) / 3.20(2) | 4.30(1) / 3.39(2) | 4.24(1) / 3.22(2) | 4.20(1) / 3.22(2) | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.86 | 2.82 | 2.92 | 2.90 | 2.86 | 2.96 | | |
| | | | ηs (Seasonal space heating efficiency) | 112 | 110 | 114 | 113 | 111 | 115 | | |
| | | | | Seasonal space heating eff. class | | | | | | | |
| | | | | A+ | | | | | | | |
| Average climate water outlet 35°C | General | SCOP | 2.99 | 3.23 | 3.29 | 3.08 | 3.34 | 3.33 | | | |
| | | ηs (Seasonal space heating efficiency) | 117 | 126 | 129 | 120 | 131 | 130 | | | |
| | | | | Seasonal space heating eff. class | | | | | | | |
| | | | | A | | | | | | | |
| Indoor Unit | | | | EBBH | 11CBV | 16CBV | 16CBV | 11CBV | 16CBV | 16CBV | |
| Casing | Colour | White | | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 890x480x344 | | | | | | | |
| Weight | Unit | | kg | 41.0 | | 42.0 | | 41.0 | | 42.0 | |
| Operation range | Heating | Water side | Min.~Max. | 10 ~55.0 | | | | | | | |
| | Domestic hot water | Water side | Min.~Max. | 25~80 | | | | | | | |
| Sound power level | Nom. | | dBA | 41.0 | | 44.0 | | 41.0 | | 44.0 | |
| Sound pressure level | Nom. | | dBA | 27.0 | | 30.0 | | 27.0 | | 30.0 | |
| Outdoor Unit | | | | ERHQ/ERHQ | 011BV3 | 014BV3 | 016BV3 | 011BW1 | 014BW17 | 016BW1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,170x900x320 | | | | | 1,345x900x320 | | |
| Weight | Unit | | kg | 102 | | | | | 108 | | |
| Compressor | Quantity | 1 | | | | | | | | | |
| | Type | Hermetically sealed scroll compressor | | | | | | | | | |
| Operation range | Cooling | Min.~Max. | °CDB | 10.0~46.0 | | | | | | | |
| | Domestic hot water | Min.~Max. | °CDB | -20 ~35 | | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | | |
| | Charge | | kg | 2.7 | | | | | 3.0 | 2.95 | 3.0 |
| | Charge | | TCO ₂ Eq | 5.6 | | | | | 6.3 | | |
| | | | | Expansion valve (electronic type) | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | | 66 | 64 | 60 | 66 | |
| | Cooling | Nom. | dBA | 64 | 66 | 69 | 64 | 66 | 69 | | |
| Sound pressure level | Heating | Nom. | dBA | 49 | 51 | 53 | 51 | 50 | 52 | | |
| | Cooling | Nom. | dBA | 50 | 52 | 54 | 50 | 50 | 54 | | |
| Power supply | Name/Phase/Frequency/Voltage | Hz/V | V3/1~/50/230 | | | | | W1/3N~/50/400 | | | |
| Current | Recommended fuses | A | 32 | | | | | 20 | | | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)
(3) Contains fluorinated greenhouse gases

| | Type | Material name | Daikin Altherma R W / F | | |
|----------------|---|---|-------------------------|---------|---|
| | | | 4-8kW | 11-16kW | |
| Controls |  | LAN adapter | BRP069A62 | • | • |
| |  | LAN adapter + PV solar connection | BRP069A61 | • | • |
| | | Remote user interface (DE, FR, NL, IT) | EKRUCBL1 | • | • |
| | | Remote user interface (EN, ES, EL, PT) | EKRUCBL3 | • | • |
| | | Remote user interface (EN, SV, NO, FI) | EKRUCBL2 | • | • |
| | | Remote user interface (EN, TR, PL, RO) | EKRUCBL4 | • | • |
| | | Remote user interface (DE, CS, SL, SK) | EKRUCBL5 | • | • |
| | | Remote user interface (EN, HR, HU, BG) | EKRUCBL6 | • | • |
| | | Remote user interface (EN, DE, RU, DA) | EKRUCBL7 | • | • |
| | | Simplified user interface | EKRUCBSB | • | • |
| | |  | Room thermostat (wired) | EKRTWA | • |
| |  | Room thermostat (wireless) | EKRTR1 | • | • |
| | | Centralised controller kit | EKCC-W | • | • |
| |  | DCOM gateway | DCOM-LT/IO | | |
| |  | DCOM gateway | DCOM-LT/MB | | |
| Adapter |  | Demand PCB | EKR1AHTA | • | • |
| |  | Digital I/O PCB | EKR1HBAA | • | • |
| Back-up heater |  | Back-up heater kit | EKLBUECB6W1 | | • |
| | | Booster heater for tank integrated design | EKBSHCA3V3 | | • |
| | | Bottom plate heater | EKBPHTH16A | | • |
| Drain | | Drain kit | EKDK04 | • | • |
| | | Drain pan for indoor wall munted | EKHBDPCA2 | • | • |
| | | Drain pan for outdoor (excl heater) | EKDP008CA | • | |
| | | Drain pan heater | EKDPH008CA | • | |
| Filter | | Magnetic filter without additives | K.FERNOXTF1 | • | • |
| | | Magnetic filter with additive (500ml inhibitor fluid F1) | K.FERNOXTF1FL | • | • |
| Installation | | Bi-Zone kit | BZKA7V3 | • | • |
| | | Snowcover | EK016SNCA | | • |
| | | U-beams for outdoor | EKFT008CA | • | |
| | | UK tank kit | EKVSU260A | | • |
| Sensor |  | Remote indoor sensor | KRCS01-1B | • | • |
| |  | Remote sensor for outdoor | EKRSCA1 | • | |
| |  | External sensor | EKRTETS | • | • |
| Others |  | PC cable | EKPCAB1 | • | • |
| | | Low sound cover for ERLQ-CV3 | EKLN-A | • | |





Daikin Altherma M

The reversible air-to-water heat pump monobloc system is the ideal system for users that have limited installation space inside. Delivering cutting-edge performance within the market's most compact monobloc outdoor unit, Daikin Altherma low temperature monobloc offers heating and cooling, with an optional connection to provide domestic hot water

A simple solution

The monobloc system combines all the features of heating and cooling (with optional domestic hot water) into one unit

- › Quiet and space-saving design that's easy to commission and install
- › All hydraulic components are combined into one outdoor unit
- › Reliable operation is guaranteed, even with outdoor temperatures as low as -25°C
- › Combine with an **ECH₂O** thermal store to provide thermal support
- › Combine with a stainless steel tank for domestic hot water

High performance

- › Improved seasonal efficiency ErP label up to A++
- › High capacity at low ambient temperatures
- › Connection to new stainless steel DHW tank (EKHWS(U)-D) with improved energy efficiency label B

Easy installation

- › Sealed refrigerant means there is no need for refrigerant handling or F-gas qualifications
- › Key hydraulic parts reduce the risk of installation errors and need for external parts such as expansion vessel, pump or isolation valves
- › Fewer components lower the installation time and help maximise profits on the job

Year-round reliability

- › Delivers higher heating capacity at low ambient temperatures
- › Flow temperatures up to 55°C, perfect for new build applications using UFH
- › Reliable operation is guaranteed, even with outdoor temperatures as low as -25°C
- › Equipped with optional backup heater

Easy connection

- › The LAN adapter allows to control the unit via the heating app




Stainless steel tank

Daikin Altherma M, 5-7 kW

A⁺⁺

55°C

- › Back-up heater less models
- › Separate indoor wiring centre (control box)
- › Separate back-up heater kit

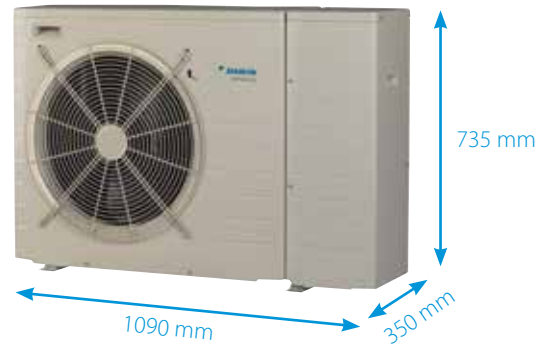

Daikin Altherma M, 11-16 kW

A⁺⁺

55°C

- › Smaller casing
- › Back-up heater less models and models with 3V integrated back-up heater for maximum installation flexibility
- › 1 ph and 3 ph models
- › Reversible and heating only models
- › LAN Adapter connection
- › A⁺⁺ heating energy label (from G to A⁺⁺)



*-36% compared to current monobloc

Daikin Altherma low temperature monobloc

Reversible air to water monobloc system, ideal when indoor space is limited

- › Compact reversible monobloc for space heating & cooling with optional domestic hot water
- › Compact heating only monobloc for space heating with optional domestic hot water
- › Fuss-free installation : only water connections required
- › Reliable operation even when -25°C outside thanks to frost protection features such as free hanging coil
- › COP up to 5



011-1W0079
011-1W0080



A++



R-410A

| Single Unit | | | | EBLQ/EDLQ | 05CV3 | 07CV3 | 05CV3 | 07CV3 |
|---------------------------|-----------------------------------|--------------------|--|-----------------------------------|-----------------------------------|-------------------|--------------------|-------------------|
| Space heating | Average climate water outlet 55°C | General | ηs (Seasonal space heating efficiency) | % | 125 | | | |
| | | | SCOP | | 3.20 | 3.22 | 3.20 | 3.22 |
| | Average climate water outlet 35°C | General | ηs (Seasonal space heating efficiency) | % | 172 | | | |
| | | | SCOP | | 4.39 | 4.14 | 4.39 | 4.14 |
| | | | | Seasonal space heating eff. class | A++ | | | |
| Heating capacity | Nom. | | kW | | 4.40(1) / 4.03(2) | 7.00(1) / 6.90(2) | 4.40(1) / 4.03(2) | 7.00(1) / 6.90(2) |
| Cooling capacity | Nom. | | kW | | 3.88(1) / 3.99(2) | 5.20(1) / 5.15(2) | - | - |
| Power input | Cooling | Nom. | kW | | 0.950(1) / 1.93(2) | 1.37(1) / 2.69(2) | - | - |
| | Heating | Nom. | kW | | 0.880(1) / 1.13(2) | 1.55(1) / 2.45(2) | 0.880(1) / 1.13(2) | 1.55(1) / 2.02(2) |
| COP | | | | | 5.00(1) / 3.58(2) | 4.52(1) / 3.42(2) | 5.00(1) / 3.58(2) | 4.52(1) / 3.42(2) |
| EER | | | | | 4.07(1) / 2.07(2) | 3.80(1) / 2.10(2) | - | - |
| Dimensions | Unit | HeightxWidthxDepth | mm | | 735x1,090x350 | | | |
| Weight | Unit | | kg | | 76.0 | 80.0 | 76.0 | 80.0 |
| Operation range | Heating | Water side | Min.~Max. | °C | 15 ~55.0 | | | |
| | Cooling | Ambient | Min.~Max. | °CDB | 10.0~43.0 | | ~~~ | |
| | | Water side | Min.~Max. | °CDB | 5.00 ~22.0 | | ~~~ | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | -25.0 ~35.0 | | 25~80 | |
| Refrigerant | Type | | | | R-410A | | | |
| | GWP | | | | 2,088 | | | |
| | Charge | | kg | | 1.30 | 1.45 | 1.30 | 1.45 |
| | Charge | | TCO ₂ Eq | | 2.714 | 3.027 | 2.714 | 3.027 |
| | Control | | | | Expansion valve (electronic type) | | | |
| Sound power level | Heating | Nom. | dBA | | 61 | 62 | 61 | 62 |
| | Cooling | Nom. | dBA | | 63.0 | | - | - |
| Sound pressure level | Heating | Nom. | dBA | | 48 | 49 | 48 | 49 |
| | Cooling | Nom. | dBA | | 48 | 50 | - | - |
| Wiring centre | | | | | EKCB07CV3 | | EK2CB07CV3 | |
| Casing | Colour | | | | White | | | |
| | Material | | | | Precoated sheet metal | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | 360x340x97.0 | | | |
| Weight | Unit | | kg | | 4.00 | | | |
| Back-up heater kit | | | | | EKMBUHC3V3 | | EKMBUHC9W1 | |
| Casing | Colour | | | | White | | | |
| | Material | | | | Precoated sheet metal | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | 560x250x210 | | | |
| Weight | Unit | | kg | | 11.0 | | 13.0 | |

(1) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

(3) Contains fluorinated greenhouse gases

Daikin Altherma low temperature monobloc without back-up heater

Reversible air to water monobloc system, ideal when indoor space is limited

- › Monobloc all-in-one concept including hydraulic parts
- › Separate indoor wiring center (control box)
- › LAN Adapter connection
- › Possible to combine with domestic hot water
- › Energy efficient heating only system based on air-to-water heat pump technology
- › A++ heating energy label (from G to A++)



E(D-B)LQ011-016CV3



011-1W0259 → 261



| Single Unit | | | | EBLQ/EDLQ | 011CV3 | 014CV3 | 016CV3 | 011CW1 | 014CW1 | 016CW1 | |
|---|-----------------------------------|---------------------|--|-----------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--|
| Space heating | Average climate water outlet 55°C | General | η_s (Seasonal space heating efficiency) | | 120 | 123 | 119 | 120 | 123 | 119 | |
| | | | SCOP | | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | |
| | | | | Seasonal space heating eff. class | A+ | | | | | | |
| | Average climate water outlet 35°C | General | η_s (Seasonal space heating efficiency) | | 156 | 153 | 149 | 156 | 153 | 149 | |
| SCOP | | | | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | | |
| | | | Seasonal space heating eff. class | A++ | | A+ | | A++ | | A+ | |
| Heating capacity | Nom. | | kW | | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | |
| Cooling capacity (only applicable to EBLQ) | Nom. | | kW | | 12.4 (1) / 11.6 (2) | 12.8 (1) / 12.6 (2) | 13.9 (1) / 13.6 (2) | 12.4 (1) / 11.6 (2) | 12.8 (1) / 12.6 (2) | 13.9 (1) / 13.6 (2) | |
| Power input | Cooling | Nom. | kW | | 3.18 (1) / 5.09 (2) | 3.16 (1) / 5.14 (2) | 3.56 (1) / 5.96 (2) | 3.18 (1) / 5.09 (2) | 3.16 (1) / 5.14 (2) | 3.56 (1) / 5.96 (2) | |
| | Heating | Nom. | kW | | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | |
| COP | | | | | 4.61 (1) / 3.55 (2) | 4.30 (1) / 3.32 (2) | 4.26 (1) / 3.26 (2) | 4.61 (1) / 3.55 (2) | 4.30 (1) / 3.32 (2) | 4.26 (1) / 3.26 (2) | |
| EER (only applicable to EBLQ) | | | | | 3.90 (1) / 2.28 (2) | 4.05 (1) / 2.45 (2) | 3.90 (1) / 2.28 (2) | 3.90 (1) / 2.28 (2) | 4.05 (1) / 2.45 (2) | 3.90 (1) / 2.28 (2) | |
| SEER (only applicable to EBLQ) | | | | | 3.85 | 3.89 | 3.90 | 3.85 | 3.89 | 3.90 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,348x1,160x380 | | | | | | | |
| Weight | Unit | | kg | 151 | | | 154 | | | | |
| Operation range (3) Heating | Ambient | Min.~Max. | °CWB | -25~35 | | | | | | | |
| | | Water side | Min.~Max. | °C | 25~55 | | | | | | |
| Operation range (3) Cooling (only applicable to EBLQ) | Ambient | Min.~Max. | °CDB | 10~46 | | | | | | | |
| | | Water side | Min.~Max. | °C | 5~22 | | | | | | |
| Operation range (3) Domestic hot water | Ambient | Min.~Max. | °CDB | -25~35 | | | | | | | |
| | | Water side | Min.~Max. | °C | 25~80 | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | |
| | GWP | 2087.5 | | | | | | | | | |
| | Charge | kg | 3.40 | | | | | | | | |
| | Charge | TCO ₂ Eq | 7.10 | | | | | | | | |
| | | | | Expansion valve (electronic type) | | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | 66 | | 64 | | 66 | |
| | Cooling | Nom. | dBA | 64 | | 66 | | 64 | | 66 | |
| Sound pressure level | Heating | Nom. | dBA | 51 | | 52 | | 51 | | 52 | |
| | Cooling | Nom. | dBA | 50 | | 52 | | 50 | | 52 | |

| Wiring centre | | | | EKCB07CV3 | EK2CB07CV3 |
|---------------|----------|-----------------------|----|--------------|------------|
| Casing | Colour | White | | | |
| | Material | Precoated sheet metal | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 360x340x97.0 | |
| Weight | Unit | | kg | 4.00 | |

| Back-up heater kit | | | | EKMBUHC3V3 | EKMBUHC9W1 |
|--------------------|----------|-----------------------|----|-------------|------------|
| Casing | Colour | White | | | |
| | Material | Precoated sheet metal | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 560x250x210 | |
| Weight | Unit | | kg | 11.0 | |
| | | | | 13.0 | |

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) Including back-up heater and/or booster heater, see details in databook.

Daikin Altherma

low temperature monobloc with integrated back-up heater

Reversible air to water monobloc system, ideal when indoor space is limited

- › Monobloc all-in-one concept including hydraulic parts
- › Separate indoor wiring center (control box)
- › LAN Adapter connection
- › Possible to combine with domestic hot water
- › Energy efficient heating only system based on air-to-water heat pump technology
- › A++ heating energy label (from G to A++)



E(D-B)LQ011-016CV3


















011-1W0259 → 261



| Single Unit | | | | EBLQ/EDLQ | 011C3V3 | 014C3V3 | 016C3V3 | 011C3W1 | 014C3W1 | 016C3W1 |
|---|------------------------------|----------------------|--|-----------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------|
| Space heating | Average climate water outlet | General | η _s (Seasonal space heating efficiency) | 120 | 123 | 119 | 120 | 123 | 119 | |
| | | | SCOP | 3.09 | 3.16 | 3.06 | 3.09 | 3.16 | 3.06 | |
| | 55°C | General | Seasonal space heating eff. class | A+ | | | | | | |
| | | | η _s (Seasonal space heating efficiency) | 156 | 153 | 149 | 156 | 153 | 149 | |
| Average climate water outlet | General | SCOP | 3.98 | 3.90 | 3.80 | 3.98 | 3.90 | 3.80 | | |
| | | 35°C | Seasonal space heating eff. class | A++ | | A+ | | A++ | | A+ |
| Heating capacity | Nom. | | kW | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | 11.2 (1) / 11.0 (2) | 14.5 (1) / 13.6 (2) | 16.0 (1) / 15.2 (2) | |
| Cooling capacity (only applicable to EBLQ) | Nom. | | kW | 12.4 (1) / 11.6 (2) | 12.8 (1) / 12.6 (2) | 13.9 (1) / 13.6 (2) | 12.4 (1) / 11.6 (2) | 12.8 (1) / 12.6 (2) | 13.9 (1) / 13.6 (2) | |
| Power input | Cooling | Nom. | kW | 3.18 (1) / 5.09 (2) | 3.16 (1) / 5.14 (2) | 3.56 (1) / 5.96 (2) | 3.18 (1) / 5.09 (2) | 3.16 (1) / 5.14 (2) | 3.56 (1) / 5.96 (2) | |
| | Heating | Nom. | kW | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | 2.43 (1) / 3.10 (2) | 3.37 (1) / 4.10 (2) | 3.76 (1) / 4.66 (2) | |
| COP | | | | 4.61 (1) / 3.55 (2) | 4.30 (1) / 3.32 (2) | 4.26 (1) / 3.26 (2) | 4.61 (1) / 3.55 (2) | 4.30 (1) / 3.32 (2) | 4.26 (1) / 3.26 (2) | |
| EER (only applicable to EBLQ) | | | | 3.90 (1) / 2.28 (2) | 4.05 (1) / 2.45 (2) | 3.90 (1) / 2.28 (2) | 3.90 (1) / 2.28 (2) | 4.05 (1) / 2.45 (2) | 3.90 (1) / 2.28 (2) | |
| SEER (only applicable to EBLQ) | | | | 3.85 | 3.89 | 3.90 | 3.85 | 3.89 | 3.90 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,348x1,160x380 | | | | | | |
| Weight | Unit | | kg | 157 | | | | 160 | | |
| Operation range (3) Heating | Ambient | Min.~Max. | °CWB | -25~35 | | | | | | |
| | | Water side Min.~Max. | °C | 25~55 | | | | | | |
| Operation range (3) (only applicable to EBLQ) Cooling | Ambient | Min.~Max. | °CDB | 10~46 | | | | | | |
| | | Water side Min.~Max. | °C | 5~22 | | | | | | |
| Operation range (3) Domestic hot water | Ambient | Min.~Max. | °CDB | -25~35 | | | | | | |
| | | Water side Min.~Max. | °C | 25~80 | | | | | | |
| Refrigerant | Type | | | R-410A | | | | | | |
| | GWP | | | 2087.5 | | | | | | |
| | Charge | | kg | 3.40 | | | | | | |
| | Charge | | TCO ₂ Eq | 7.10 | | | | | | |
| | Control | | | Expansion valve (electronic type) | | | | | | |
| Sound power level | Heating | Nom. | dBA | 64 | | 66 | | 64 | | 66 |
| | Cooling | Nom. | dBA | 64 | 66 | 69 | 64 | 66 | 69 | |
| Sound pressure level | Heating | Nom. | dBA | 50 | 51 | 52 | 50 | 51 | 52 | |
| | Cooling | Nom. | dBA | 50 | 52 | 54 | 50 | 52 | 54 | |

| Wiring centre | | | | 011C3V3 | 014C3V3 | 016C3V3 | 011C3W1 | 014C3W1 | 016C3W1 |
|---------------|----------|--------------------|----|-----------------------|---------|---------|---------|---------|---------|
| Casing | Colour | | | White | | | | | |
| | Material | | | Precoated sheet metal | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 360x340x97.0 | | | | | |
| Weight | Unit | | kg | 4.00 | | | | | |

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) Including back-up heater and/or booster heater, see details in databook.

| | Illustration | Type | Material name | Daikin Altherma M | | |
|---|---|--|-----------------|-------------------|----------------------|----------------------------|
| | | | | 5-7 kW | 11-16 kW BUH-less | 11-16 kW with 3V BUH |
| Controls |  | LAN adapter | BRP069A62 | • | • | • |
| | | LAN adapter + PV solar connection | BRP069A61 | • | • | • |
| |  | Remote user interface (DE, FR, NL, IT) | EKRUCBL1 | • | • | • |
| | | Remote user interface (EN, ES, EL, PT) | EKRUCBL3 | • | • | • |
| | | Remote user interface (EN, SV, NO, FI) | EKRUCBL2 | • | • | • |
| | | Remote user interface (EN, TR, PL, RO) | EKRUCBL4 | • | • | • |
| | | Remote user interface (DE, CS, SL, SK) | EKRUCBL5 | • | • | • |
| | | Remote user interface (EN, HR, HU, BG) | EKRUCBL6 | • | • | • |
| | | Remote user interface (EN, DE, RU, DA) | EKRUCBL7 | • | • | • |
| | | Simplified user interface | EKRUCBSB | • | | |
| |  | Room thermostat (wired) | EKRTWA | • | • | • |
| | | Room thermostat (wireless) | EKRTR1 | • | • | • |
|  | DCOM gateway | DCOM-LT/IO | | | | |
| | DCOM gateway | DCOM-LT/MB | | | | |
| Adapter | | Digital I/O PCB | | | | |
| Back-up heater |  | Back-up heater monobloc | EKMBUHC3V3/C9W1 | • | • | |
| |  | Bottom plate heater | EKBPTH16A | | • | |
| Drain |  | Drain kit | EKDK04 | | • | |
| Sensor |  | Remote sensor for OU | EKRSCA1 | • | • | • |
| |  | External sensor | EKRTETS | • | • | • |
| |  | Remote sensor for IU | KRCS01-1 | • | • | • |
| Wiring centre |  | Control box | EKCB07CAV3 | • | • | • |
| |  | Option box | EK2CB07CAV3 | • | • | • |
| By pass |  | Valve kit | EKMBHBP1 | • | • | • |
| Bi-Zone |  | Bi-Zone kit | BZKA7V3 | • | • | • |
| Others |  | Cable | EKPC CAB3 | • | | |

Daikin Altherma R HT



Why choose a Daikin Altherma high temperature split

The Daikin Altherma high temperature split is the perfect heating solution to upgrade an old heating and hot water system to achieve more cost savings and energy efficiency, without replacing the existing piping and radiators

✓ Comfort

Best for renovation projects

Air-to-water high temperature heat pumps are ideal for renovations and replacing old boilers. Daikin Altherma high temperature split's compact design requires minimal installation space and integrates seamlessly with your existing piping and radiators. Minimal installation ensures you can enjoy the energy efficiency of a heat pump without having to replace your entire system.

- › Easy replacement: reuse existing piping/radiators
- › Reduced installation time
- › Limited installation space needed as the indoor unit and domestic hot water tank can be stacked together
- › No need to change existing radiators and piping as water temperatures can be increased up to 80°C for heating and domestic hot water use

Whether your customer wants only domestic hot water or the advantage of solar energy, Daikin offers a wide range of options, including:

Stainless steel domestic hot water tank

The domestic hot water tank can be stacked on top of the indoor unit to save space, or installed next to each other if space is available.

- › Available in 200 or 250 litres
- › Efficient temperature heating: from 10°C – 50°C in only 60 minutes*

*Test completed with a 16 kW outdoor unit at ambient temperature of 7°C for a 200 litre tank



ECH₂O thermal store: hot water savings with solar energy

Combine the Daikin Altherma heat pump with a thermal store to reduce energy costs by taking advantage of the sun's renewable energy. Built for small and large homes, customers can choose from a pressureless or pressurised hot water system.



✓ Energy efficiency

Powered by renewable energy

Powered by **65% renewable energy** extracted from the air and 35% electricity, our Daikin Altherma high temperature heat pump provides heating and hot water with A+ energy efficiency.


✓ Reliability

The Daikin Altherma high temperature split optimises its technology to deliver reliable year-round comfort, even in the most extreme climates.

- › 11-15 kW capacities
- › Low running costs and optimum comfort at even the coldest outdoor temperatures, thanks to the unique cascade compressor approach
- › Works with existing high temperature radiators up to 80°C without an additional backup heater

Cascade technology

High performance heating in 3 steps to achieve 80°C water temperature without using an additional backup heater

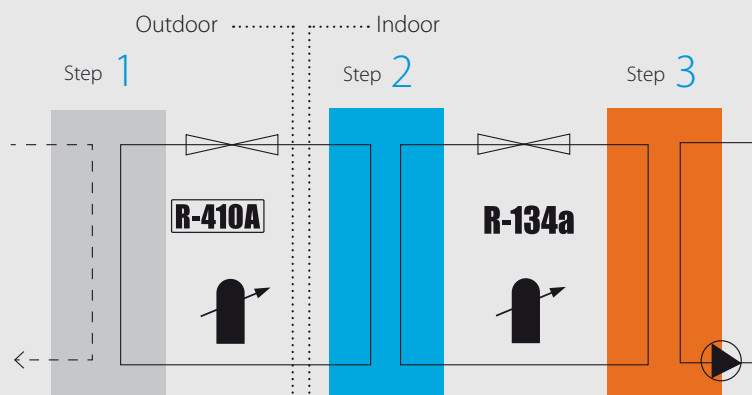


- 1 **The outdoor unit** extracts heat from the ambient outdoor air. This heat is transferred to the indoor unit via R-410A refrigerant
- 2 The **indoor unit** increases the temperature with R-134a refrigerant
- 3 The **refrigerant circuit** transfers the heat to the water in the system

Daikin Altherma high temperature split

Floor standing heating only air to water heat pump
combinable with existing radiators

- › Energy efficient heating only system based on air to water heat pump technology
- › Single phase floor standing indoor unit up to 16kW
- › Three phase floor standing indoor unit up to 16kW
- › High temperature application: up to 80°C without electric heater
- › Easy replacement of existing boiler, without changing heating pipes
- › Combinable with high temperature radiators
- › Low energy bills and low CO₂ emissions
- › Inverter controlled scroll compressor



011-1W0256 → 258









| Efficiency data | | EKHDRD + ERRQ/ERSQ | | 011ADV17 + ERRQ011AV1 | 011ADV17 + ERSQ011AV1 | 014ADV17 + ERRQ014AV1 | 014ADV17 + ERSQ014AV1 | 016ADV17 + ER(R/S) Q016AV1 | 011ADY17 + ERRQ011AY1 | 011ADY17 + ERSQ011AY1 | 014ADY17 + ERRQ014AY1 | 014ADY17 + ERSQ014AY1 | 016ADY17 + ER(R/S) Q016AY1 |
|------------------|-----------------------------------|--|-----------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Heating capacity | Nom. | kW | | 11.3 (1) / 11.0 (2) / 11.2 (3) | | 14.5 (1) / 14.0 (2) / 14.4 (3) | | 16.0 (1) / 16.0 (2) / 16.0 (3) | 11.3 (1) / 11.0 (2) / 11.2 (3) | | 14.5 (1) / 14.0 (2) / 14.4 (3) | | 16.0 (1) / 16.0 (2) / 16.0 (3) |
| Power input | Heating Nom. | kW | | 3.80 (1) / 4.40 (2) / 2.67 (3) | 3.87 (1) / 4.40 (2) / 2.67 (3) | 5.02 (1) / 5.65 (2) / 3.87 (3) | 5.09 (1) / 5.65 (2) / 3.87 (3) | 5.86 (1) / 6.65 (2) / 4.31 (3) | 3.80 (1) / 4.40 (2) / 2.67 (3) | 3.87 (1) / 4.40 (2) / 2.67 (3) | 5.02 (1) / 5.65 (2) / 3.87 (3) | 5.09 (1) / 5.65 (2) / 3.87 (3) | 5.86 (1) / 6.65 (2) / 4.31 (3) |
| COP | | | | 2.97 (1) / 2.50 (2) / 4.20 (3) | 2.92 (1) / 2.50 (2) / 4.20 (3) | 2.89 (1) / 2.48 (2) / 3.72 (3) | 2.85 (1) / 2.48 (2) / 3.72 (3) | 2.73 (1) / 2.41 (2) / 3.72 (3) | 2.97 (1) / 2.50 (2) / 4.20 (3) | 2.92 (1) / 2.50 (2) / 4.20 (3) | 2.89 (1) / 2.48 (2) / 3.72 (3) | 2.85 (1) / 2.48 (2) / 3.72 (3) | 2.73 (1) / 2.41 (2) / 3.72 (3) |
| Space heating | Average climate water outlet 55°C | General | SCOP | 2.96 | | 2.98 | | 3.01 | 2.96 | | 2.98 | | 3.01 |
| | | ηs (Seasonal space heating efficiency) | % | 115 | | 116 | | 117 | 115 | | 116 | | 117 |
| | Average climate water outlet 35°C | General | SCOP | 2.70 | | 2.81 | | 2.88 | 2.70 | | 2.81 | | 2.88 |
| | | ηs (Seasonal space heating efficiency) | % | 105 | | 110 | | 112 | 105 | | 110 | | 112 |
| | | | Seasonal space heating eff. class | C | | B | | | C | | B | | |

| Indoor Unit | | EKHDRD | | 011ADV17 | 014ADV17 | 016ADV17 | 011ADY17 | 014ADY17 | 016ADY17 |
|----------------------|--------------------------|-----------------------|-----------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Casing | Colour | Metallic grey | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | | | | | | |
| Weight | Unit | kg | | | | | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | | | |
| | | Water side | Min.~Max. | °C | | | | | |
| | Domestic hot water | Ambient | Min.~Max. | °CDB | | | | | |
| | | Water side | Min.~Max. | °C | | | | | |
| Refrigerant | Type | R-134a | | | | | | | |
| | Charge | kg | | | | | | | |
| Sound pressure level | Nom. | dBA | | 43.0 / 46.0 / 0.00 / 0.00 | 45.0 / 46.0 / 0.00 / 0.00 | 46.0 / 46.0 / 0.00 / 0.00 | 43.0 / 46.0 / 0.00 / 0.00 | 45.0 / 46.0 / 0.00 / 0.00 | 46.0 / 46.0 / 0.00 / 0.00 |
| | Night quiet mode Level 1 | dBA | | 40.0 / 0.00 / 0.00 | 43.0 / 0.00 / 0.00 | 45.0 / 0.00 / 0.00 | 40.0 / 0.00 / 0.00 | 43.0 / 0.00 / 0.00 | 45.0 / 0.00 / 0.00 |

| Outdoor Unit | | ERRQ-011AV1 | ERSQ-011AV1 | ERRQ-014AV1 | ERSQ-014AV1 | ERRQ/ERSQ 016AV1 | ERRQ-011AY1 | ERSQ-011AY1 | ERRQ-014AY1 | ERSQ-014AY1 | ERRQ/ERSQ 016AY1 |
|----------------------|------------------------------|---------------------------------------|-------------|-------------|-------------|------------------|-------------|-------------|-------------|-------------|------------------|
| Dimensions | Unit | HeightxWidthxDepth mm | | | | | | | | | |
| Weight | Unit | kg | | | | | | | | | |
| Compressor | Quantity | 1 | | | | | | | | | |
| | Type | Hermetically sealed scroll compressor | | | | | | | | | |
| Operation range | Heating | Min.~Max. | | °CWB | | | | | | | |
| | Domestic hot water | Min.~Max. | | °CDB | | | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | | |
| | Charge | kg | | | | | | | | | |
| | Charge | TCO ₂ Eq | | | | | | | | | |
| | | Expansion valve (electronic type) | | | | | | | | | |
| Sound power level | Heating | Nom. | | dBA | | | | | | | |
| Sound pressure level | Heating | Nom. | | dBA | | | | | | | |
| Power supply | Name/Phase/Frequency/Voltage | | Hz/V | | | | | | | | |
| Current | Recommended fuses | | A | | | | | | | | |

(1)EW 55°C; LW 65°C; Dt 10°C; ambient conditions: 7°CDB/6°CWB | (2)EW 70°C; LW 80°C; Dt 10°C; ambient conditions: 7°CDB/6°CWB | (3)EW 30°C; LW 35°C; Dt 5°C; ambient conditions: 7°CDB/6°CWB | Contains fluorinated greenhouse gases

| | Type | Material name |
|----------------|--|---------------|
| Controls | Remote user interface | EKRUAHTB |
| |  Room thermostat (wired) | EKRTWA |
| |  Room thermostat (wireless) | EKRTR1 |
| | Centralised controller kit | EKCC-W |
| |  DCOM gateway | DCOM-LT/IO |
| |  DCOM gateway | DCOM-LT/MB |
| Adapter |  Demand PCB | EKRP1AHTA |
| |  Digital I/O PCB | EKRP1HBAA |
| Back-up heater | Back-up heater for HT 1~ | EKBUHAA6V3 |
| | Back-up heater for HT 3~ | EKBUHAA6W1 |
| | Bottom plate heater | EKBPTH16A |
| Installation | UK tank kit | EKUHWHTA |
| | Stand alone kit | EKFMAHTB |
| Sensor | External sensor | EKRTETS |
| Valve | Refrigerant stop valves | EKRSVHTA |
| Others | Compatibility kit 1 | EKMKHT1A |
| | Compatibility kit 2 | EKMKHT2A |



Daikin Altherma M HW



Why choose a monobloc domestic hot water heat pump?

The high performance monobloc domestic hot water heat pump is the newest addition to the Daikin water heater range. Enhanced hot water comfort with quiet operation, easy handling, flexibility of installation and different integration possibilities. Perfect for renovation and new build.

✓ High performance

- › Delivering high comfort hot water of temperatures up to 55 °C with the heat pump only
- › Among the most quiet with 53 dBA sound power and 36 dBA at 2meters
- › High tapping rate L, XL for guaranteeing maximum domestic hot water flow
- › A+ seasonal energy efficiency

✓ Easy to install and control

- › All components are built-in and ready to work
- › Compact sizes and low weight, which make it easily manoeuvrable through small doors and spaces
- › Easy connection, from top of the unit, maximizes placing possibilities
- › 3 easy operating modes, Eco – Auto – Boost, for your personal preferences

✓ Renewable power

- › Produces domestic hot water by extracting energy from the outside air
- › For the 260liter an extra coil possibility exists for solar water heating
- › The monobloc can be standard connected to a PV installation severely minimizing running costs

✓ Year-round reliability

- › Total thermal power up to 3.4 kW ensures optimal hot water comfort
- › Wide operation range: down to -7 °C outside temperature with the heat pump unit, and below -7°C with electrical heating element support
- › Guaranteed optimal comfort by heat pump up to 38 °C outside temperature



Domestic hot water heat pump

Enhanced hot water comfort

- › Quiet operation: with 36dBA at 2m, one of the most silent products in its kind
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › Enhanced comfort: the 3 operating modes will give an answer to all your needs
- › Solar connectivity: empower your house with renewable energy
- › Wide operation range: down to -7 °C outside temperature with the heat pump, below -7 °C electrical heating element support



| Indoor unit | | EKHH2E | | 2E200AV3(3) | | 2E260AV3(3) | | 2E260PAV3(3) | |
|--|--|--|-----------|-----------------------------|---------------------------|-----------------------------|-------|-----------------------------|--|
| Heat up time | Max. | hh:mm | | 08:17:00 (3) / 06:30:44 (4) | | 10:14:00 (3) / 07:56:46 (4) | | 10:14:00 (3) / 07:46:46 (4) | |
| COP | | | | 2.94 (1) / 3.30 (2) | | 3.10 (1) / 3.60 (2) | | | |
| Domestic hot water | Output | Nom | kW | | | 1.8 | | | |
| Equivalent hot water | Max | | l | 275 | | | | 342 | |
| Dimensions | Unit | Height | mm | 1,714 | | | | 2,004 | |
| | | Diameter | mm | | | 650 | | | |
| Weight | Unit | Empty | kg | 83 | | 95 | | 112 | |
| | | Full | kg | 282 | | 349 | | 358 | |
| | | Packed unit | kg | 100 | | 120 | | 140 | |
| Installation place | | | | | | Indoor | | | |
| IP class | | | | | | IP-X4 | | | |
| Compressor | Type | | | | | Rotary non-inverter | | | |
| Refrigerant | Type | | | | | R-134a | | | |
| | GWP | | | | | 1,430.0 | | | |
| | Charge | TCO ₂ Eq | | | | 1.287 | | | |
| Heat pump | Casing | Colour | | | | White body / Black top | | | |
| | | Material | | | | Cover: EPP top finishing | | | |
| | Defrost method | | | | Active with hot gas valve | | | | |
| | Automatic defrost start | °C | | | -2 | | | | |
| | System pressure | Max. | bar | | | 7 | | | |
| | | Operation Ambient range | Min. Max. | °CDB | | | -7 | | |
| Tank | Integrated heating element power | Nom. | kW | | | 38 | | | |
| | | | | | | 1.5 | | | |
| | Casing | Colour | | | | White | | | |
| | | Material | | | | Embossed ABS | | | |
| Dimensions | Unit | Height | mm | 1,210 | | | | 1,500 | |
| | | Operation Water side range | Min. Max. | °C | | | 10 | | |
| | Installation | Solar thermal connection possible | | | | - | | 1 | |
| | | Standing heat loss | W | 60 | | 70 | | 71 | |
| Domestic hot water heating | General | Declared load profile | | L | | | | XL | |
| | | Water heating energy efficiency class | | | | A+ | | | |
| | | Thermostat temperature setting | °C | | | 55 | | | |
| | Average climate | AEC (Annual electricity consumption) | kWh | 835 | | | | 1,323 | |
| | | η _{wh} (water heating efficiency) | % | 123 | | | | 127 | |
| | Cold climate | AEC (Annual electricity consumption) | kWh | 1,091 | | | | 1,826 | |
| η _{wh} (water heating efficiency) | | % | 94 | | | | 92 | | |
| Warm climate | AEC (Annual electricity consumption) | kWh | 756 | | | | 1,296 | | |
| | η _{wh} (water heating efficiency) | % | 135 | | | | 129 | | |
| Sound power level | Domestic hot water heating | Indoor unit | dBA | | | 53 | | | |
| Heat pump | Power supply | Phase | | | | 1P | | | |
| | | Frequency | Hz | | | 50 | | | |
| | | Voltage | V | | | 230 | | | |
| | | Maximum running current | A | | | 2.4 | | | |
| Tank | Power supply | Phase | | | | 1P | | | |
| | | Frequency | Hz | | | 50 | | | |
| | | Voltage | V | | | 230 | | | |

(1) Temperature of incoming air supply = 7°C, temperature of boiler storage environment = 20°C, water heated from 10°C to 55°C (according to UNI EN 16147-2011).
 (2) Temperature of incoming air supply = 15°C, temperature of boiler storage environment = 20°C, water heated from 10°C to 55°C (according to UNI EN 1614 7-2011).
 (3) Indoor temperature : 29°CDB, 19°CWB; outdoor temperature : 46°CDB, 24°CWB
 (4) Indoor temperature : 27°CDB, 19°CWB; outdoor temperature : 35°CDB, 24°CWB

Daikin Altherma R HW



Why choose a split domestic hot water heat pump ?

The split domestic hot water heat pump is the ideal replacement for an electric domestic hot water tank to provide semi-instantaneous hot water.

✓ Comfort

Fresh water principle:

- › Domestic hot water production on demand means fresh water at all times
- › Minimum volume of stored domestic hot water prevents the risk of contamination and sedimentation

Easy installation


- › No water tank pressure and limited pressure in the heat exchanger
- › Low maintenance: no anode means no scale and lime deposits or corrosion
- › Compact and designed with additional controls for easy installation and maintenance

✓ Reliability

- › Electrical backup (2.5 kW) ensures hot water under all circumstances; the 500l tank can also be equipped with an external hydraulic backup
- › The ECH₂O thermal store is engineered to provide you with fresh, healthy and safe hot water
- › By just using the heat pump, the temperature of the water can reach up to 55°C and its production is guaranteed down to -15°C

✓ Energy efficiency

- › Heat pump extracts renewable energy from the outside air to produce hot water
- › Increase energy saving and efficiency by connecting the unit to solar panels

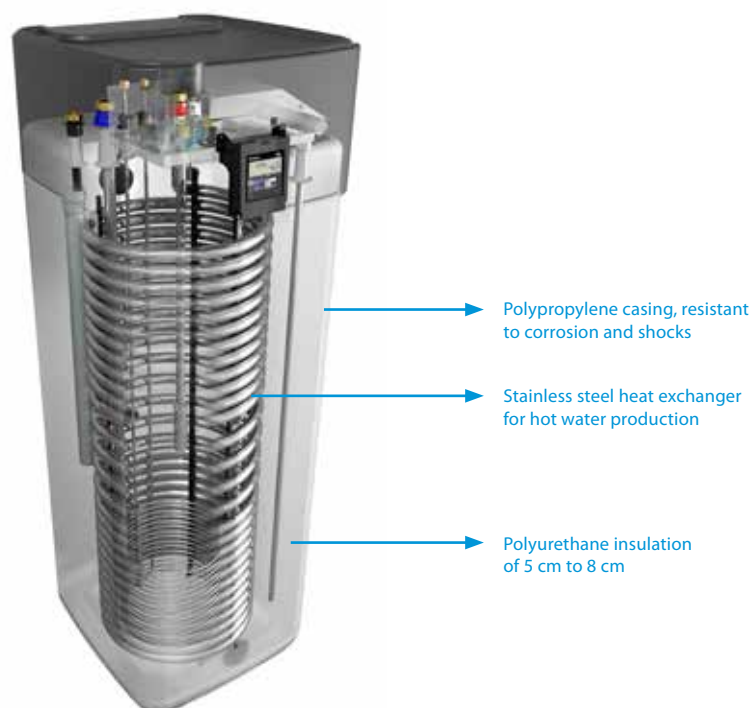

Domestic hot water heat pump

Hot water in an efficient way

- › Domestic hot water is heated almost immediately
- › Combine it with solar heating for even better energy efficiency
- › Easy installation: no water tank pressure and only limited pressure in the heat exchanger
- › Low maintenance: no anode means no scale and lime deposits or corrosion
- › Electrical back-up (2.5 kW) ensures hot water under all circumstances. The 500L tank can also be equipped with an external hydraulic back-up.
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Possible to connect to photovoltaic solar panels to provide energy for your heat pump (optional)



Heat pumps

| Efficiency data | | EKHHP + ERWQ | | 300A2V3 + 02AV3 | | 500A2V3 + 02AV3 | |
|----------------------------|------------------------------|---|---------------------|-----------------|--------------------------------------|-----------------|--|
| Domestic hot water heating | General | Declared load profile | | L | | XL | |
| | Average climate | η _{wh} (water heating efficiency) | | 119 | | 123 | |
| | | Water heating energy efficiency class | | A | | | |
| COP | | | | 4.30 (1) | | | |
| Indoor Unit | | EKHHP | | 300A2V3 | | 500A2V3 | |
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | 1,750x615x615 | | 1,750x790x790 | |
| Weight | Unit | | | 70 | | 80 | |
| Tank | Water volume | | | 294 | | 477 | |
| | Maximum water temperature | | | 85 | | | |
| Operation range | Domestic hot water | Ambient | Min.~Max. | °CDB | | 2~35 | |
| | | Water side | Min.~Max. | °C | | 5~55 | |
| Refrigerant | Type | | | | R-410A | | |
| Outdoor Unit | | ERWQ | | 02AV3 | | 02AV3 | |
| Dimensions | Unit | HeightxWidthxDepth | | 550x765x285 | | | |
| Weight | Unit | | | 35 | | | |
| Compressor | Quantity | | | | 1 | | |
| | Type | | | | Hermetically sealed swing compressor | | |
| Operation range | Domestic hot water | Min.~Max. | | °CDB | | -15~35 | |
| Refrigerant | Type | | | | R-410A | | |
| | GWP | | | | 2,087.5 | | |
| | Charge | | kg | | 1.05 | | |
| | Charge | | TCO ₂ Eq | | 2.2 | | |
| Sound pressure level | Heating | Nom. | | dBA | | 47 | |
| | Cooling | Nom. | | dBA | | 47 | |
| Power supply | Name/Phase/Frequency/Voltage | | | | V3/1~/50/230 | | |

(1) At 7°C ambient temperature (2) Contains fluorinated greenhouse gases



Daikin Altherma R Flex Type HT HW

Why choose a Daikin Altherma HT Flex Type

Daikin Altherma HT Flex Type is ideal for large requirements of domestic hot water like apartment buildings or commercial spaces.

✓ Comfort

Domestic hot water

- › Equipped with air-to-water heat pump technology
- › Best system to meet high demands for hot water
- › Using renewable energy from the heat pump, the system can heat the hot water tank up to 75°C without using an electric heater

✓ Energy efficiency

- › High energy efficiency achieves high sustainability and low operation costs
- › Inverter compressor continuously adjusts the compressor speed to meet actual demand. Fewer power-consuming starts and stops result in decreased energy consumption (up to 30%) and more stable temperatures

✓ Reliability

Modular system

One or more outdoor units can be connected to several indoor units (maximum 10 indoor units per outdoor unit)



Daikin Altherma High Temperature Flex Type

- › Low energy bills and low CO₂ emissions
- › Easy installation and maintenance
- › Customised to meet your building's needs: up to 10 indoor units can be connected to 1 outdoor unit



| Outdoor Unit | | | | EMRQ | 8AB | 10AB | 12AB | 14AB | 16AB | |
|----------------------|----------------------------|--------------------------------|--|------|-----------------|---------|----------|----------|----------|--|
| Heating capacity | Nom. | | | kW | 22.4 (1) | 28 (1) | 33.6 (1) | 39.2 (1) | 44.8 (1) | |
| Seasonal efficiency | Domestic hot water heating | General Average climate | Declared load profile η _{wh} (water heating efficiency) Water heating energy efficiency class | XL | | | | | | |
| | | | | 93 | | 83.7 | | 93 | | |
| Casing | Colour | Daikin White | | | | | | | | |
| | Material | Painted galvanized steel plate | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | 1,680x1,300x765 | | | | | |
| Weight | Unit | | | kg | 331 | | 339 | | | |
| Operation range | Domestic hot water | Ambient | Min.-Max. | °CDB | -20~35 | | | | | |
| Refrigerant | Type | R-410A | | | | | | | | |
| | GWP | 2,087.5 | | | | | | | | |
| Piping connections | Liquid | OD | | mm | 9.52 | | 12.7 | | | |
| | | | | | Suction | OD | mm | 19.1 | 22.2 | |
| | High and low pressure gas | OD | | mm | 15.9 | | 19.1 | | 22.2 | |
| | | | | | Piping length | OU - IU | Max. | 100 | | |
| Total piping length | System | Equivalent | Actual | m | | | | | | |
| | | | | 300 | | | | | | |
| Sound power level | Heating | Nom. | | dBA | 78 | 80 | 83 | 84 | | |
| Sound pressure level | Heating | Nom. | | dBA | 58 | 60 | 62 | 63 | | |
| Power supply | Phase/Voltage | | | V | 3~/380-415 | | | | | |
| Current | Recommended fuses | | | A | 20 | 25 | | 40 | | |

(1) Condition: Ta=7°CDB/6°CWB, 100% connection ratio
(2) Contains fluorinated greenhouse gases

| Indoor Unit | | | | EKHBRD | 011ADV17 | 014ADV17 | 016ADV17 | 011ADY17 | 014ADY17 | 016ADY17 |
|----------------------|--------------------|-----------------------|-----------|--------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Casing | Colour | Metallic grey | | | | | | | | |
| | Material | Precoated sheet metal | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | 705x600x695 | | | | | |
| Weight | Unit | | | kg | 144 | | 147 | | | |
| Operation range | Domestic hot water | Ambient | Min.-Max. | °CDB | -20.0~35.0 | | | | | |
| | | | | | Water side | Min.-Max. | °C | 25~80 | | |
| Refrigerant | Type | R-134a | | | | | | | | |
| | Charge | kg | 2.60 | | | | | | | |
| | | TCO ₂ eq | 3.718 | | | | | | | |
| Sound pressure level | Nom. | | | dBA | 43.0 / 46.0 / 0.00 / 0.00 | 45.0 / 46.0 / 0.00 / 0.00 | 46.0 / 46.0 / 0.00 / 0.00 | 43.0 / 46.0 / 0.00 / 0.00 | 45.0 / 46.0 / 0.00 / 0.00 | 46.0 / 46.0 / 0.00 / 0.00 |
| | Night quiet mode | Level 1 | | dBA | 40 / 0 / 0 | 43 / 0 / 0 | 45 / 0 / 0 | 40 / 0 / 0 | 43 / 0 / 0 | 45 / 0 / 0 |

Options

| Type | Material name | EMRQ-AB |
|---------------|-----------------------|----------------|
| Drain | Central drain pan kit | KWC25C450 |
| Refnet | Refnet header | KHRQ(M)22M29H8 |
| | Refnet header | KHRQ(M)22M64H8 |
| | Refnet joint | KHRQ(M)22M20T8 |
| | Refnet joint | KHRQ(M)22M29T8 |
| | Refnet joint | KHRQ(M)22M64T8 |




Daikin Altherma R Flex Type

With the expanded Daikin Altherma high capacity range we now offer the ideal solutions for all high demanding systems. Ideal for collective housing, hotels, swimming pools which require high comfort and high reliability.

Why choose a Daikin Altherma R Flex Type?

✓ Strong and reliable

- › Equipped with air-to-water heat pump technology to extract the outdoor air for energy
- › COP possible up to 3.07/A+ at Ta DB/WB 7/6°C - LWC 45°C
- › Reversible, enhanced cooling capacity
- › External control possible

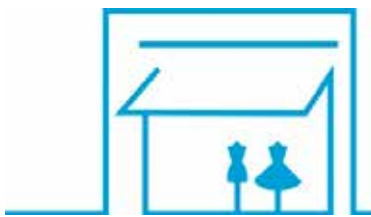

✓ Collective/commercial advantage

- › Cascade heating capacity up to 62,7 kW
- › Cascade cooling up to 63,3 kW
- › VRV technology ensures high efficiencies and reliable working
- › Compact model for easy installation and fit for smaller spaces



Daikin Altherma low temperature high capacity

- › Hydronic module for indoor installation eliminating the need for glycol
- › Ideal for colder climates as the lack of glycol will allow for high efficiency
- › Compact dimensions and limited pipework allow for installation in very restricted spaces
- › Easy transportation as separate units will fit in an elevator



up to **A++** **50°C** **R-410A**

Heat pumps

| Heating & Cooling | | | | | SEVHX20BAW/ SERHQ20BAW1 | SEVHX32BAW/ SERHQ32BAW1 | SEVHX40BAW/ SERHQ20BAW1+SERHQ32BAW1 | SEVHX64BAW/ SERHQ32BAW1+SERHQ32BAW1 |
|-----------------------------------|-----------------------------------|------------|---|---------------------------------------|----------------------------|----------------------------|--|--|
| Cooling capacity | Nom. | | | kW | 21.2 (1) | 31.8 (1) | 42.3 (1) | 63.3 (1) |
| Heating capacity | Nom. | | | kW | 20.8 (2) | 31.2 (2) | 41.7 (2) | 62.7 (2) |
| Power input | Cooling | Nom. | | kW | 7.47 (1) | 12.7 (1) | 15.1 (1) | 25.5 (1) |
| | Heating | Nom. | | kW | 6.76 (2) | 10.6 (2) | 13.7 (2) | 21.4 (2) |
| EER | | | | | 2.84 | 2.5 | 2.8 | 2.48 |
| COP | | | | | 3.07 | 2.93 | 3.03 | 2.93 |
| Space heating | Average climate water outlet 35°C | General | SCOP ns (Seasonal space heating efficiency) | % | 3.93 | 3.53 | 3.80 | 3.53 |
| | | | | | 154 | 138 | 149 | 138 |
| | | | | | A++ | | A+ | |
| Seasonal space heating eff. class | | | | | | | | |
| Unit for indoor installation | | | | | SEVHX20BAW | SEVHX32BAW | SEVHX40BAW | SEVHX64BAW |
| Dimensions | Unit | Height | | | 1,573 | | | |
| | | Width | | | 766 | | | |
| | | Depth | | | 396 | | | |
| Weight | Unit | | | 97.0 | 105 | 137 | 153 | |
| | Packed unit | | | 109 | 117 | 149 | 165 | |
| Water side Heat exchanger | Type | | | Brazed plate | | | | |
| | Water volume | | | 3 | 5 | 6 | 9 | |
| | Water flow rate | Cooling | Nom. | l/min | 60 (3) | 90 (3) | 120 (3) | 181 (3) |
| Heating | | Nom. | l/min | 60 (2) | 90 (2) | 120 (2) | 181 (2) | |
| Sound power level | Nom. | | | 63 | | | | |
| Operation range | Cooling | Ambient | Min.-Max. | °CDB | -5~43 | | | |
| | | Water side | Min.-Max. | °CDB | 5 (4)~20 | | | |
| | Heating | Ambient | Min.-Max. | °CDB | -15~35 | | | |
| | | Water side | Min.-Max. | °CDB | 25~50 | | | |
| Refrigerant | Type / GWP | | | R-410A / 2,087.5 | | | | |
| | Circuits Control | Quantity | | | 1 | Electronic expansion valve | | 2 |
| Water circuit | Piping connections diameter | | | 1-1/4" (female) | | | 2" (female) | |
| | Piping | | | 1-1/4" | | | | |
| | Water pressure drop | Cooling | Nom. | kPa | 17 (7) | 24 (7) | 19 (7) | 29 (7) |
| Power supply | Total water volume | | | 4.2 (8) | 5.8 (8) | 7.9 (8) | 11.0 (8) | |
| | Phase/Frequency/Voltage | | | Hz/V 3N~/50/400 | | | | |
| Outdoor Unit | | | | | SERHQ20BAW1 | SERHQ32BAW1 | | |
| Dimensions | Unit | Height | | | 1,680 | | | |
| | | Width | | | 765 | | | |
| | | Depth | | | 930 | | | 1,240 |
| Weight | Unit | | | 240 | | | 316 | |
| | Packed unit | | | 273 | | | 356 | |
| Compressor | Quantity | | | 2 | | | 3 | |
| Fan | Type | | | Hermetically sealed scroll compressor | | | | |
| | Type | | | Axial | | | | |
| | Quantity | | | 1 | | | 2 | |
| Air flow rate | Cooling | Nom. | m ³ /min | 185 | | | 233 | |
| | | Heating | Nom. | m ³ /min | 185 | | | 233 |

(1) Cooling: entering evaporator water temp. 12°C; leaving evaporator water temp. 7°C; ambient air temp. 35°C (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (Dt=5°C) (3) Condition: Ta 35°C - LWE 7°C (DT = 5°C) (4) Water can be used above 5°C. Between 0°C and 5°C a 30% glycol solution (propylene or ethylene) has to be used. Between 0°C and -10°C a 40% glycol solution (propylene or ethylene) has to be used (see installation manual and information related to OPZL option) (5) Excluding water volume in the unit. In most applications this minimum water volume will have a satisfying result. In critical processes or in rooms with a high heat load though, extra water volume might be required. Refer to operation range for more info. (6) Excluding the water volume in the unit. This volume will guarantee sufficient defrost energy for all applications, however, this volume can be multiplied by 0,66 if the heating setpoint is ≥ 45°C (eg. Fan coils) (7) This is PD between inlet & outlet connections of unit. It includes the water side heat exchanger pressure drop. (8) Including piping + PHE; excluding expansion vessel



Daikin Altherma 3 GEO Top performance even in coldest climate

The Daikin Altherma ground source heat pump uses geothermal energy and Daikin's inverter heat pump technology to deliver heating and hot water in all climates.



Space heating

During winter



Space cooling

Active cooling with high efficiency



Domestic hot water production

Integrated 180L stainless steel tank



Leaving water temperature up to 65°C, so the unit can work with underfloor heating but also with radiators.



Renovation and new build

Suitable for renovation: thanks to a high water temperature of 65°C output, the unit fits with classic radiators.

Suitable for new build: the Daikin Altherma 3 geo is also combinable with fan coils and underfloor piping.

BLUEEVOLUTION

Bluevolution technology using R-32, environmentally friendly refrigerant with a lower GWP, reducing its CO2 equivalent by 73% compared to its predecessor R-410A.



Electricity savings

The continuous inverter operation allows a high modulation range down to 0.85kW, avoiding the unit to use more electricity to stop and start.



Heat pumps



Daikin Altherma HPC provides heating or cooling for living rooms.


An 80-100 metre borehole in the ground creates a constant inlet temperature.

Care for peace of mind

The Daikin Altherma 3 GEO is designed to perform the best efficiencies in what matter the most: quietness and connectivity.



Extremely quiet operation

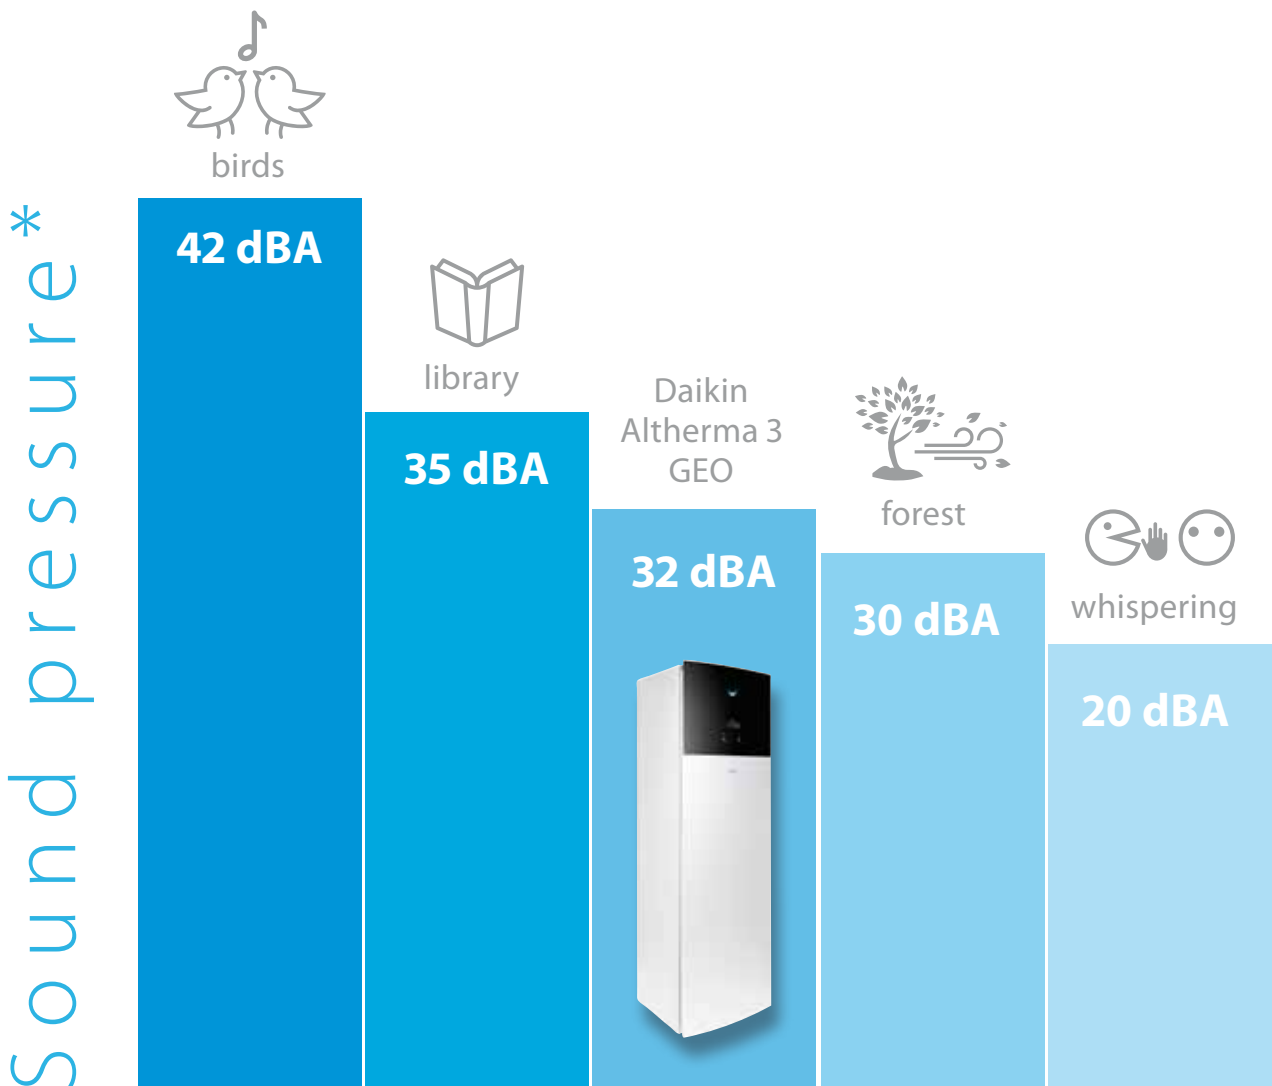

*at 1 meter.



Built-in connectivity

Control your home climate from any place, at any time

LAN connectivity



Always in control.

Control your climate from any place, at any time.



Monitor the status of your heating system



Control the operation mode and set temperature



Schedule the set temperature and operation mode

Madoka wired remote controller for Daikin Altherma

A new generation of user interface, redesigned and intuitive.

- ✓ Intuitive control with a premium design
- ✓ Three colors to match any interior design
- ✓ Easily set operation parameters



BRC1HHDW



BRC1HHDS



BRC1HHDK



Groundbreaking innovation

Quick and easy installation thanks to factory-fitted piping on top of the unit, pre-cabled electrical connections and reduced overall weight.

All pipe connections on top, paired in and out



Standard electrical connections pre-cabled



Can easily be installed in confined spaces thanks to a small footprint and integrated handles



666 mm

Advanced user interface

The Daikin Eye

The intuitive Daikin eye shows you in real time the status of your system.



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.



Quick to configure

Log in and you'll be able to completely configure the unit via the new user interface in 9 steps. You can even check if the unit is ready for use by running test cycles. You can upload the settings on an USB stick and download it directly into the unit, or via the cloud.

Easy operation

Work super-fast with the new user interface. It's easy to use with just a few buttons and 2 navigational knobs.

Beautiful design

The user interface was especially designed to be very intuitive. The high contrasted colour screen delivers stunning and practical visuals that really help you as installer or service engineer.



1891 mm

597 mm

Removable compressor module, reducing the overall weight by 70 kg



Daikin Altherma ground source heat pump

Ground source heat pump for heating, cooling & hot water

- › Top-level seasonal efficiency thanks to our inverter heat pump technology providing the highest savings on running costs.
- › Delivering temperatures up to 65°C at high efficiency, the R-32 Daikin Altherma 3 GEO is suitable for underfloor heating/cooling, fan coils and radiators.
- › Integrated indoor unit: all-in-one floor standing unit including the stainless steel domestic hot water tank saves space and installation time.
- › The unit has a similar footprint when compared to other household appliances.
- › Reversible heat pump, allowing heating and cooling.



A+++
(1)



A
L



R-32

| Indoor Unit | | | | EGSA | H06D9W | X06D9W(G) | H10D9W | X10D9W(G) |
|----------------------------|-----------------------------------|-----------------------|---|---------|------------------------|-----------|--------|-----------|
| Heating capacity | Min. | | | | | | 0.85 | |
| | Nom. | | | | 3.34 | | | 5.48 |
| | Max. | | | | 7.5 | | | 9.10 |
| Power input | Nom. | | | | 0.7 | | | 1.12 |
| COP | | | | | 4.74 | | | 4.89 |
| Space heating | Average climate water outlet 55°C | General | ηs (Seasonal space heating efficiency) Seasonal space heating eff. class | % | 150 | 153 | 160 | 162 |
| | Average climate water outlet 35°C | General | ηs (Seasonal space heating efficiency) Seasonal space heating eff. class | % | 214 | 219 | 210 | 213 |
| Domestic hot water heating | General | Declared load profile | | | | | L | |
| | Average climate | | ηwh (water heating efficiency) Water heating energy efficiency class | % | | | 117 | |
| Space cooling | UFH | General | SEER | | - | 15 | - | 15 |
| | | | Pdesign | kW | - | 8 | - | 8 |
| | Fan Coil | General | SEER | | - | 14 | - | 14 |
| | | | Pdesign | kW | - | 8 | - | 8 |
| Casing | Colour | White or Silver-grey | | | | | | |
| | Material | Precoated sheet metal | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | 1,891x597x666 | | | |
| Weight | Unit | | | kg | 222 | | | |
| Tank | Water volume | | | l | 180 | | | |
| | Insulation | Heat loss | | kWh/24h | 1.2 | | | |
| | Corrosion protection | | | | Pickling | | | |
| Operation range | Installation space | | Min.~Max. | °C | 5 / 35 | | | |
| | Brine side | | Min.~Max. | °C | -10 / 30 | | | |
| | Heating | Water side | Min.~Max. | °C | 5 / 65 | | | |
| | Domestic hot water | Water side | Min.~Max. | °C | 25 / 60 | | | |
| Refrigerant | Type | | | | R-32 | | | |
| | GWP | | | | 675 | | | |
| | Charge | | | kg | 1.70 | | | |
| Sound power level | Nom. | | | dBA | 39.0 | | 41.0 | |
| | Sound pressure level at 1 meter | | | Nom. | dBA | 27.0 | | 29.0 |
| Power supply | Name/Phase/Frequency/Voltage | | | Hz/V | 3~/50/400 or 1~/50/230 | | | |
| Current | Recommended fuses | | | A | 3P 16A or 1P 32A | | | |

(1) According to EU n°811/2013 label lay-out 2019, on a scale from G to A+++.

Options

| | Type | Material name |
|----------|--------------------------------|----------------|
| Controls | Remote user interface | BRC1HHDAAK/S/W |
| | Room thermostat (wired) | EKRTWA |
| | Room thermostat (wireless) | EKRTR1 |
| | Cascade control | EKCC8-W |
| Adapter | Gateway | DCOM-LT/IO |
| | Gateway | DCOM-LT/MB |
| Sensor | Demand PCB | EKRP1AHTA |
| | Digital I/O PCB | EKRP1HBAA |
| | Remote indoor sensor | KRCS01-1 |
| | External sensor | EKRTETS |
| Valve | Reduce power limitation sensor | EKCSSENS |
| | Valve kit | EKVK1A/2A/3A |
| Others | PC cable | EKPCCAB4 |
| | Ground source filling kit | KGSFILL2 |
| | Hydromodule replacement | EKGSHYDMOD |
| | Separate power supply BUH | EKGSPOWCAB |
| | Magnetic filter Fernox | K.FERNOXTF1 |
| | Magnetic filter Fernox | K.FERNOXTF1FL |

Daikin Altherma ground source heat pump

Ground source heat pump for heating & hot water

- › Ground source heat pump technology uses stable geothermal energy, unaffected by the outside temperature
- › Highest seasonal efficiency thanks to our inverter heat pump technology
- › Quick and easy installation thanks to factory-fitted piping on top of the unit and reduced overall weight
- › Integrated indoor unit: all-in-one floor standing unit including the domestic hot water tank
- › User interface with thermostat function for higher comfort, quick commissioning, easy servicing and energy management to control energy consumption and costs



EGSQH-A9W



011-1W0067



| Indoor Unit | | EGSQH | | 10S18A9W | |
|----------------------------|-----------------------------------|--|--|---------------|----------------------------|
| Space heating | Average climate water outlet 55°C | General | η_s (Seasonal space heating efficiency) | % | 144 |
| | | | Seasonal space heating eff. class | | A++ |
| | Average climate water outlet 35°C | General | η_s (Seasonal space heating efficiency) | % | 202 |
| | | | Seasonal space heating eff. class | | A++ |
| Domestic hot water heating | General | Declared load profile | | | L |
| | Average climate | η_{wh} (water heating efficiency) | % | 93.1 | A |
| Heating capacity | Min. | Water heating energy efficiency class | | | |
| | Nom. | | | | 3.11(1) / 2.47(2) |
| | Max. | | | | 10.2(1) / 9.29(2) |
| Power input | Nom. | | | | 13.0(1) / 11.9(2) |
| | | | | | 2.34(1) / 2.82(2) |
| COP | | | | | 4.35(1) / 3.29(2) |
| Casing | Colour | | | | White |
| | Material | | | | Precoated sheet metal |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,732x600x728 | |
| Weight | Unit | | | | 210 |
| Tank | Water volume | | | | 180 |
| | Insulation | Heat loss | kWh/24h | 1.36 | |
| | Corrosion protection | | | | Anode |
| Operation range | Domestic hot water | Water side | Min.-Max. | °C | 25 / 25 ~55 / 60 |
| | Refrigerant | Type | | | |
| | GWP | | | | 2,087.5 |
| | Charge | kg | 1.80 | | |
| | Charge | TCO:Eq | 3.76 | | |
| | Control | | | | Electronic expansion valve |
| Sound power level | Nom. | | | | 46.0 |
| Sound pressure level | Nom. | | | | 32.0 |
| Power supply | Name/Phase/Frequency/Voltage | | | | 9W/3~/50/400 |
| Current | Recommended fuses | A | 25 | | |

(1) EWB/LWB 0°C/-3°C - LWC 35°C (DT=5°C) (2) EWB/LWB 0°C/-3°C - LWC 45°C (DT=5°C) (3) Contains fluorinated greenhouse gases

Options

| | Type | Material name |
|--------------|--|---------------------------|
| Controls | LAN adapter | BRP069A62 |
| | LAN adapter + PV solar connection | BRP069A61 |
| | Remote user interface (DE, FR, NL, IT) | EKRUCBL1 |
| | Remote user interface (EN, ES, EL, PT) | EKRUCBL3 |
| | Remote user interface (EN, SV, NO, FI) | EKRUCBL2 |
| | Remote user interface (EN, TR, PL, RO) | EKRUCBL4 |
| | Remote user interface (DE, CS, SL, SK) | EKRUCBL5 |
| | Remote user interface (EN, HR, HU, BG) | EKRUCBL6 |
| | Remote user interface (EN, DE, RU, DA) | EKRUCBL7 |
| | Simplified user interface | EKRUCBSB |
| | Room thermostat (wired) | EKRTWA |
| | Room thermostat (wireless) | EKRTR1 |
| | DCOM gateway | DCOM-LT/IO |
| | DCOM gateway | DCOM-LT/MB |
| Adapter | Demand PCB | EKRP1AHTA |
| | Digital I/O PCB | EKRP1HBAA |
| Installation | Wire harness | EKGSCONBP1 |
| | Remote indoor sensor | KRCS01-1B |
| Sensor | External sensor | EKRTETS |
| | Valve kit | EKVK1A/2A/3A |
| Valve | PC cable | EKPCCAB1 |
| | Others | Ground source filling kit |

Daikin Altherma hybrid heat pump



Why choose a Daikin Altherma hybrid heat pump

The Daikin Altherma hybrid heat pump is the ideal solution to replace your old gas boiler.


✓ Comfort

Heating

A Daikin Altherma hybrid heat pump automatically determines the most economic and energy efficient heating combination

- › **Heat pump operation:** the best available technology for optimising running costs at moderate outdoor temperatures
- › **Hybrid operation:** both the gas boiler and heat pump operate simultaneously to deliver the ultimate comfort for your customer
- › **Gas operation:** when outdoor temperatures drastically drop, the unit will automatically switch to gas operation mode

Illustration of an average European climate

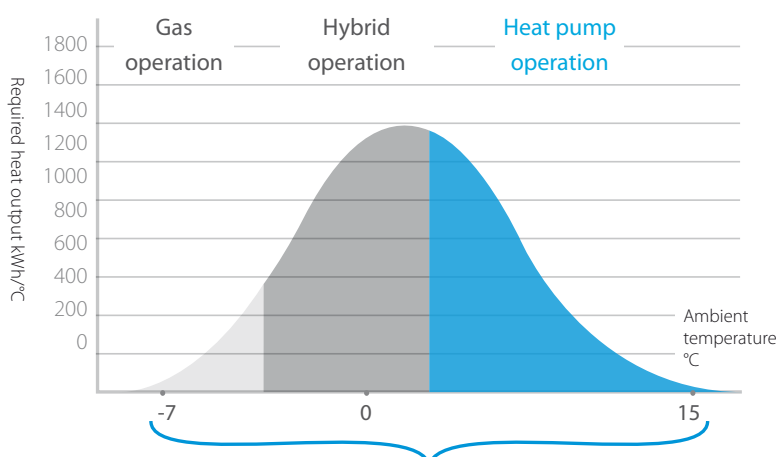


+ 35% efficiency
(space heating) compared to condensing boiler

- › Heat load: 14 kW
- › 70% heat pump output
- › 30% gas boiler output

Heat load = the capacity of the space heating system required to maintain comfortable indoor temperatures at any time

Required heat output = heat load x n° of occurring hours per year

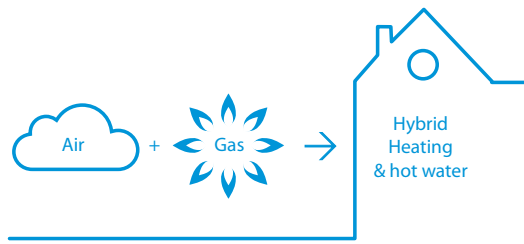

Heat pump outdoor unit



Heat pump indoor unit

Hot water

The gas condensing boiler's dual heat exchanger increases hot water efficiency by up to 15% when compared with traditional gas boilers

Cooling

Incorporate cooling for a total solution that integrates seamlessly with underfloor heating or radiators

Quick and easy installation

As the heat pump indoor unit and gas condensing boiler are delivered as separate units, they are easier to handle, operate and install

Investment benefits

- › Combines with existing radiators; reducing the cost and disruption of installations
- › Coverage of heat loads up to 27 kW makes this unit ideal for renovation applications
- › Possible to connect to photovoltaic solar panels to optimise self-consumption of the electricity produced

Heat pumps



✓ Energy efficiency

The ideal combination

Depending on the outdoor temperature, energy prices and the internal heat load, the Daikin Altherma hybrid heat pump smartly chooses between the heat pump and/or the gas boiler, possibly in simultaneous operation, and always selects the most economic operation mode.

Supported by renewable energy

When working in heat pump mode, the system is powered by renewable energy extracted from the air and can achieve up to **A++ energy efficiency**.

Hot water produced with gas condensing technology

Unique dual heat exchanger increases efficiency up to 15% compared to traditional gas boilers

- › Cold tap water flows directly into the heat exchanger
- › Optimal and continuous condensing of the flue gases during domestic hot water preparation

✓ Reliability


- › Low investment cost with no need to replace existing piping and radiators
- › Low running costs for heating and domestic hot water
- › Compact dimensions
- › Ideal for renovation applications
- › Easy and fast installation



Case study

Replacing a gas boiler with a Daikin Altherma hybrid heat pump means saving on running costs for both space heating and domestic hot water supply.

A running costs comparison is made below based on parameters for a typical Belgian winter. As a result of the hybrid principle, the most cost-efficient operation will be used no matter the ambient outdoor temperature.

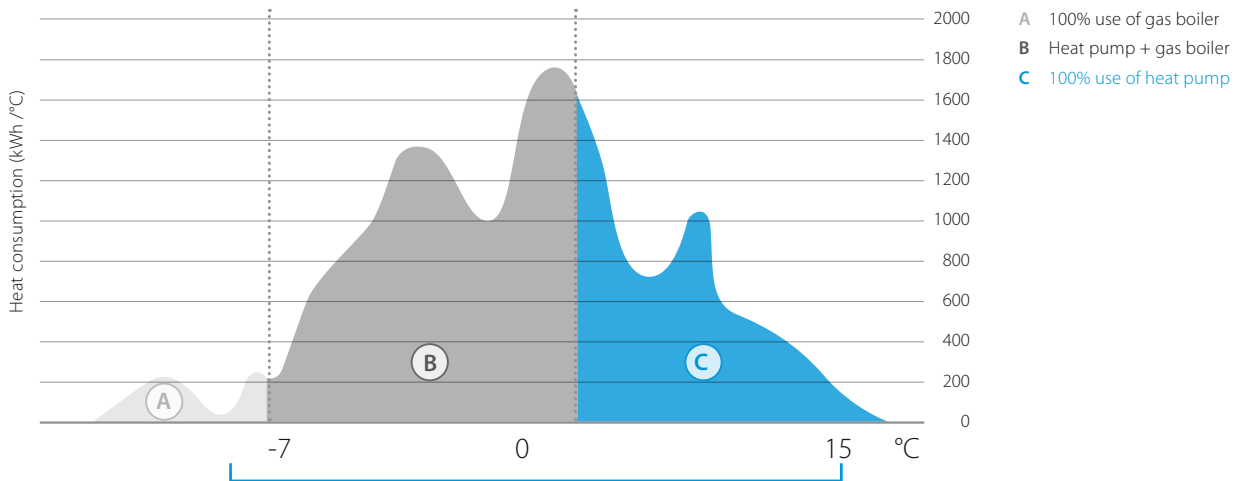

+35% efficiency (space heating) compared to existing condensing gas boiler

| | Daikin altherma hybrid heat pump | New gas condensing boiler | Existing gas condensing boiler |
|--------------------------------|----------------------------------|---------------------------|--------------------------------|
| Space heating | | | |
| Energy supplied by HP | 12,800 kWh | | |
| HP efficiency | 3.64 Scop | | |
| Energy supplied by gas boiler | 6,700 kWh | 19,500 kWh | 19,500 kWh |
| Space heating efficiency | 90% | 90% | 75% |
| Running costs | 1,220 € | 1,520 € | 1,820 € |
| DHW HEATING | | | |
| Energy supplied by gas boiler* | 3,000 kWh | 3,000 kWh | 3,000 kWh |
| DHW heating efficiency* | 90% | 80% | 65 % |
| Running costs* | 230 € | 260 € | 320 € |
| TOTAL | | | |
| Running costs | 1,450 € | 1,780 € | 2,140 € |

Conditions

| | |
|---|-------------|
| Heat load | 16 kW |
| Design temperature | -8°C |
| Space heating off temperature | 16°C |
| Maximum water temperature | 60°C |
| Minimum water temperature | 38°C |
| Gas price | 0.070 €/kWh |
| Electricity price (day) | 0.237 €/kWh |
| Electricity price (night) | 0.152 €/kWh |
| Total space heating requirement | 19,500 kWh |
| Total DHW heating requirement (4 persons) | 3,000 kWh |

* for combi-boiler, no separate domestic hot water tank

→ Yearly savings:
for space heating and domestic hot water

-19% versus new gas condensing boiler

330 €/year

-32% versus existing gas condensing boiler

690 €/year

Daikin Altherma hybrid heat pump

Hybrid technology combining condensing gas and air to water heat pump for heating and hot water

- › Heating only + heating and cooling models
- › Depending on outdoor temperature, energy prices and internal heat load, Daikin Altherma hybrid heat pump always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- › Easy and fast installation thanks to the compact dimensions and quick interconnections



| Efficiency data | | | | EHYHBH05AV32 + EVLQ05CV3 | EHYHBH08AV32 + EVLQ08CV3 | EHYHBX08AV3 + EVLQ08CV3 |
|---------------------------------------|-----------------------------------|--------------------------------|---|--------------------------|--------------------------|-------------------------|
| Space heating | Average climate water outlet 55°C | General | SCOP ηs (Seasonal space heating efficiency) | 3.28 128 | 3.24 127 | 3.29 129 |
| | Seasonal space heating eff. class | | | A++ | | |
| | Domestic hot water heating | General | Declared load profile | | XL | |
| Average climate | | ηwh (water heating efficiency) | | 95.8 | | |
| Water heating energy efficiency class | | | A | | | |
| Heating capacity | Nom. | | kW | 4.40(1) / 4.03(2) | 7.40(1) / 6.89(2) | 7.40(1) / 6.89(2) |
| Cooling capacity | Nom. | | kW | - | - | 6.86(1) / 5.36(2) |
| Power input | Heating | Nom. | kW | 0.870(1) / 1.13(2) | 1.66(1) / 2.01(2) | 1.66(1) / 2.01(2) |
| | Cooling | Nom. | kW | - | - | 2.01(1) / 2.34(2) |
| COP | | | | 5.04(1) / 3.58(2) | 4.45(1) / 3.42(2) | 4.45(1) / 3.42(2) |
| EER | | | | - | - | 3.42(1) / 2.29(2) |

| Indoor unit (Hydrobox & Boiler) | | | | EHYHBH05AV32 | EHYHBH08AV32 | EHYHBX08AV3 | EHYKOMB33AA2 | EHYKOMB33AA3 | |
|---------------------------------|-------------------------------------|---------------------|---------------|-----------------------|--------------|-------------|--------------|--------------------------------------|--|
| Central heating | Heat input Qn (net calorific value) | Nom | Min/Max | - | | | | 6.2 / 7.6 / 7.6 / 22.1 / 27.0 / 27.0 | |
| | Output Pn at 80/60°C | Min/Nom | | - | | | | 6.7 / 8.2 / 8.2 / 21.8 / 26.6 / 26.6 | |
| | Efficiency | Net calorific value | | - | | | | 98 / 107 | |
| Domestic hot water | Operation range | Min/Max | °C | - | | | | 15 / 80 | |
| | Output | Min/Nom | | - | | | | 7.6 / 32.7 | |
| | Water flow | Rate | Nom | - | | | | 9.0 / 15.0 | |
| Gas | Operation range | Min/Max | °C | - | | | | 40/65 | |
| | Connection | Diameter | | - | | | | 15 | |
| | Consumption (G20) | Min/Max | m³/h | - | | | | 0.78/3.39 | |
| | Consumption (G25) | Min/Max | m³/h | - | | | | 0.90/3.93 | |
| Supply air | Consumption (G31) | Min/Max | m³/h | - | | | | 0.30/1.29 | |
| | Connection | | | - | | | | 100 | |
| Flue gas | Concentric | | | - | | | | 1 | |
| | Connection | | | - | | | | 60 | |
| Casing | Colour | | | White | | | | White - RAL9010 | |
| | Material | | | Precoated sheet metal | | | | Precoated sheet metal | |
| Dimensions | Unit | HeightxWidth | Casing xDepth | 902x450x164 | | | | 710x450x240 | |
| Weight | Unit | Empty | | 30.0 | 31.2 | | | 36 | |
| Power supply | Phase/Frequency/Voltage | | | - | | | | 1~/50/230 | |
| Electrical power consumption | Max. | | | - | | | | 55 | |
| | Standby | | | - | | | | 2 | |
| Operation range | Heating | Ambient | Min.~Max. | -25 ~25 | | | | - | |
| | | Water side | Min.~Max. | 25 ~55 | | | | - | |
| | Cooling | Ambient | Min.~Max. | ~~ | | | | 10 ~43 | |
| | | Water side | Min.~Max. | ~~ | | | | 5 ~22 | |

| Outdoor unit | | | | EVLQ05CV3 | EVLQ08CV3 |
|-------------------|------------------------------|--------------------|---------------------|--------------------------------------|-----------|
| Dimensions | Unit | HeightxWidthxDepth | | 735x832x307 | |
| Weight | Unit | | | 54 | 56 |
| Compressor | Quantity | | | 1 | |
| | Type | | | Hermetically sealed swing compressor | |
| Operation range | Heating | Min.~Max. | | -25~-25 | |
| Refrigerant | Type | | | R-410A | |
| | GWP | | | 2,088 | |
| | Charge | | kg | 1.5 | 1.6 |
| | Charge | | TCO ₂ Eq | 3.0 | 3.3 |
| Sound power level | Heating | Nom. | | 61 | 62 |
| | Heating | Nom. | | 48 | 49 |
| Power supply | Name/Phase/Frequency/Voltage | | | V3/1~/50/230 | |
| Current | Recommended fuses | | | 16 | 20 |

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (2) Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) (3) Cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) (4) Cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C)

Daikin Altherma R Hybrid + multi



The Daikin Altherma hybrid heat pump can also be combined with an air-to-air multi system to provide optimal cooling. Easily installed and managed via an app on a smartphone or tablet, the Daikin Altherma hybrid heat pump + multi is an all-in-one system for heating, cooling and hot water purposes.



Multi features

- ✓ Equipped with Bluevolution technology
- ✓ 3, 4 and 5 ports for multi outdoor units
- ✓ Combinable with different Split & Sky Air indoor units:
One port can be used for hot water production

Control with Daikin Online Controller app



BLUEVOLUTION

| Hybrid heat pump | Wall mounted | | | | | | | | | | | | Concealed ceiling | | | | | | Floor standing | | | Round flow cassette | | | Fully flat cassette | | | Ceiling suspended | | | Concealed floor standing | | | | | | | | | | | | |
|--------------------------|--------------|----|-----------|----|----|----|--------|----|--------|----|----|----|-------------------|----|---------|----|----|-------|----------------|----|--------|---------------------|----|--------|---------------------|----|-------|-------------------|----|-------|--------------------------|----|-------|----|----|----|----|----|----|---|---|---|---|
| | CHYHBH-AV32 | | FTXJ-MW/S | | | | CTXM-M | | FTXM-M | | | | | | FDXM-F3 | | | FBA-A | | | FVXM-F | | | FCAG-A | | | FFA-A | | | FHA-A | | | FNA-A | | | | | | | | | | |
| Connectable indoor units | 05 | 08 | 20 | 25 | 35 | 50 | 15 | 20 | 25 | 35 | 42 | 50 | 60 | 71 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | | | | |
| 3MXM52N | • | | • | • | • | • | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | |
| 3MXM68N | • | | • | • | • | • | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 4MXM68N | • | | • | • | • | • | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 4MXM80N | • | • | • | • | • | • | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |
| 5MXM90N | • | • | • | • | • | • | • | • | • | • | • | • | • | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |

| Efficiency data | | | | CHYHBH05AV32 /3MXM52N | CHYHBH05AV32 /3MXM68N | CHYHBH05AV32 /4MXM68N | CHYHBH05AV32 /4MXM80N | CHYHBH08AV32 /4MXM80N | CHYHBH05AV32 /5MXM90N | CHYHBH08AV32 /5MXM590N |
|---------------------------------------|----------------------------|-----------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------------|
| Heating capacity | Nom. | | kW | 4.41 (1) | | 4.50 (1) | | 6.78 (1) | 4.50 (1) | 6.78 (1) |
| COP | | | | 4.49 (1) | 3.91 (1) | | 4.04 (1) | 4.17 (1) | 4.04 (1) | 4.17 (1) |
| Pump | | | | | | | 51.80 (1) | | | |
| Seasonal efficiency | Domestic hot water heating | General | Declared load profile | XL | | | | | | |
| | | Average climate | η_{wh} (water heating efficiency) | 96 | | | | | | |
| Water heating energy efficiency class | | | | A | | | | | | |







(1) DB/WB 7°C/6°C - LWC 35°C (DT=5°C), boiler bypassed

| Indoor Unit (Hydrobox) | | | | CHYHBH05AV32 | | CHYHBH08AV32 | |
|------------------------|----------|-----------------------|-----------|--------------|--|--------------|--|
| Casing | Colour | White | | | | | |
| | Material | Precoated sheet metal | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 902x450x164 | | | |
| Weight | Unit | | kg | 30.0 | | | |
| Operation range | Heating | Ambient | Min.~Max. | °C | | | |
| | | Water side | Min.~Max. | °C | | | |
| | | | | -15 ~24 | | | |
| | | | | 25 ~50 | | | |

| Indoor unit (Boiler) | | | | EHYKOMB33AA2/AA3 | | | |
|------------------------------|-------------------------------------|-----------------------|---------|------------------------------------|--|--|--|
| Central heating | Heat input Qn (net calorific value) | Nom | Min/Max | kW | | | |
| | | | | 6.2 / 7.6 / 7.6/22.1 / 27.0 / 27.0 | | | |
| | Output Pn at 80/60°C | Min/Nom | | kW | | | |
| | | | | 6.7 / 8.2 / 8.2/21.8 / 26.6 / 26.6 | | | |
| Domestic hot water | Efficiency | Net calorific value | | % | | | |
| | Operation range | Min/Max | | °C | | | |
| | | | | 98 / 107 | | | |
| Gas | Output | Min/Nom | | kW | | | |
| | Water flow | Rate | Nom | l/min | | | |
| | Operation range | Min/Max | | °C | | | |
| | | | | 7.6/32.7 | | | |
| | | | | 9.0 / 15.0 | | | |
| | | | | 40/65 | | | |
| Supply air | Connection | Diameter | | mm | | | |
| | Concentric | | | | | | |
| | | | | 15 | | | |
| Flue gas | Consumption (G20) | Min/Max | | m³/h | | | |
| | Consumption (G25) | Min/Max | | m³/h | | | |
| | Consumption (G31) | Min/Max | | m³/h | | | |
| | | | | 0.78/3.39 | | | |
| | | | | 0.90/3.93 | | | |
| | | | | 0.30/1.29 | | | |
| Casing | Connection | | | mm | | | |
| | Concentric | | | | | | |
| | | | | 100 | | | |
| | | | | 1 | | | |
| Flue gas | Connection | | | mm | | | |
| | | | | | | | |
| | | | | 60 | | | |
| Casing | Colour | White - RAL9010 | | | | | |
| | Material | Precoated sheet metal | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | Casing | mm | | | |
| | | | | 710x450x240 | | | |
| Weight | Unit | Empty | | kg | | | |
| | | | | 36 | | | |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | | | |
| | | | | 1~/50/230 | | | |
| Electrical power consumption | Max. | | | W | | | |
| | Standby | | | W | | | |
| | | | | 55 | | | |
| | | | | 2 | | | |

| Outdoor unit | | | | 3MXM52N | 3MXM68N | 4MXM68N | 4MXM80N | 5MXM90N |
|----------------------|-------------------------------|--------------------|-----------|--|----------|----------|----------|---------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 734x958x340 | | | | |
| Weight | Unit | | kg | 57 | 62 | 63 | 67 | 68 |
| Sound power level | Cooling | | dBA | 59 | 61 | | 61 | 64 |
| | Heating | | dBA | 59 | 61 | | 61 | 64 |
| Sound pressure level | Cooling | Nom. | dBA | 46 | 48 | 48 | 49 | 52 |
| | Heating | Nom. | dBA | 47 | 48 | 48 | 49 | 52 |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | | | | |
| | | | | -10~46 | | | | |
| | | | | -15~18 | | | | |
| Refrigerant | Type | R-32 | | | | | | |
| | GWP | 675 | | | | | | |
| | Charge | kg/TCO:Eq | | 1.80/1.2 | 2.00/1.4 | 2.00/1.4 | 2.40/1.6 | |
| Piping connections | Liquid | OD | mm | 6.35 | | | | |
| | Gas | OD | mm | 9.5 | | | | |
| | Piping length | OU - IU | Max. | m | | | | |
| | Additional refrigerant charge | | kg/m | 0.02 (for piping length exceeding 30m) | | | | |
| | Level difference | IU - OU | Max. | m | | | | |
| | | | | 15 | | | | |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | | | | |
| | | | | 1~/50/220-240 | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | | | | |
| | | | | 30 | | | | |

Options

| | Type | Material name | |
|---------------------|---|---|------------|
| Controls |  | LAN adapter | BRP069A62 |
| | | LAN adapter + PV solar connection | BRP069A61 |
| | | Remote user interface (DE, FR, NL, IT) | EKRUCBL1 |
| | | Remote user interface (EN, ES, EL, PT) | EKRUCBL3 |
| | | Remote user interface (EN, SV, NO, FI) | EKRUCBL2 |
| | | Remote user interface (EN, TR, PL, RO) | EKRUCBL4 |
| | | Remote user interface (DE, CS, SL, SK) | EKRUCBL5 |
| | | Remote user interface (EN, HR, HU, BG) | EKRUCBL6 |
| | | Remote user interface (EN, DE, RU, DA) | EKRUCBL7 |
| | | Simplified user interface | EKRUCBSB |
| |  | Room thermostat (wired) | EKRTWA |
| |  | Room thermostat (wireless) | EKRTR1 |
| | | Heat meter (EHYHBH* only) | K.HEATMET |
| |  | DCOM gateway | DCOM-LT/IO |
| |  | DCOM gateway | DCOM-LT/MB |
| Drain | | Drain pan for reversible H/B | EKHYDP1 |
| Installation | | Cover plate 35 | EKHY093467 |
| | | Installation jig | EKHYMNT1 |
| Sensor |  | External sensor | EKRTETS |
| Valve | | Valve kit for connection to 3rd party tank with built-in thermostat | EKHY3PART2 |
| | | Valve kit for connection to 3rd party tank with sensor pocket | EKHY3PART |
| Propane set | | Propane set | EKHY075787 |

| Type | Material name |
|---|-----------------|
| Adapter Flex-Fixed PP 100 | EKFGP6316 |
| Adapter Flex-Fixed PP 130 | EKFGS0252 |
| Chimney Connection 60/100 | EKFGP4678 |
| Chimney Connection 60/100 | EKFGP4678 |
| Chimney Connection 80/125 | EKFGP4828 |
| Chimney Connection 60/10 Air Intake Dn. 80 C83 | EKFGV1101 |
| Chimney Top PP 100 incl. Flue Pipe | EKFGP5497 |
| Chimney Top PP 130 incl. Flue Pipe | EKFGP5197 |
| Concentric connection Ø 80/125 | EKHY090717 |
| Connector Flex-Flex PP 100 | EKFGP6325 |
| Connector Flex-Flex PP 130 | EKFGP6366 |
| Connector Flex-Flex PP 80 | EKFGP6324 |
| Connection set 60/10-60 Flue/Air intake Dn. 80 C53 | EKFGV1102 |
| Eccentric connection Ø 80 | EKHY090707 |
| Elbow PP/ALU 80/125 90° | EKFGP4810 |
| Elbow PP/GLV 60/100 30° | EKFGP4664 |
| Elbow PP/GLV 60/100 45° | EKFGP4661 |
| Elbow PP/GLV 60/100 90° | EKFGP4660 |
| Elbow PP/GLV 80/125 30° | EKFGP4814 |
| Elbow PP MB-AIR 80 90° | EKFGW4085 |
| Elbow PP BM-AIR 80 45° | EKFGW4086 |
| Extension Flex PP 100 L=10 M | EKFGP6346 |
| Extension Flex PP 100 L=15 M | EKFGP6349 |
| Extension Flex PP 100 L=25 M | EKFGP6347 |
| Extension Flex PP 130 L=30 M | EKFGS0250 |
| Extension Flex PP 80 L=10 M | EKFGP6340 |
| Extension Flex PP 80 L=15 M | EKFGP6344 |
| Extension Flex PP 80 L=25 M | EKFGP6341 |
| Extension Flex PP 80 L=50 M | EKFGP6342 |
| Extension PP 60x500 | EKFGP5461 |
| Extension PP/GLV 60/100 x 1000mm | EKFGP4652 |
| Extension PP/GLV 60/100 x 500mm | EKFGP4651 |
| Extension PP/GLV 80/125 x 1000mm | EKFGP4802 |
| Extension PP/GLV 80/125 x 500mm | EKFGP4801 |
| Extension P BM-Air 80x500 | EKFGW4001 |
| Extension P BM-Air 80x1000 | EKFGW4002 |
| Extension P BM-Air 80x2000 | EKFGW4004 |
| Filling loop set | EKFL1AA |
| Flex 100-60 + Support Elbow | EKFGP6354 |
| Flex 130-60 + Support Elbow | EKFGS0257 |
| Flex Kit PP Dn.60-80 | EKFGP1856 |
| Flex Kit PP Dn.8 | EKFGP2520 |
| Flue Deflector 60 (UK Only) | EKFGP1295 |
| Flue gas non-return flap | EKFGF1A |
| Gas conversion kit from G20 to G25 | EKPS076227 |
| Inspection Elbow Plus PP/ALU 80/125 90° EPDM | EKFGP4820 |
| Meas. Tee with Inspection Panel PP/GLV 60/100 | EKFGP4667 |
| Plume Management Kit 60 (UK Only) | EKFGP1294 |
| PMK Elbow 60 45° (2 pcs) (UK Only) | EKFGP1285 |
| PMK Elbow 60 90° (UK Only) | EKFGP1284 |
| PMK Extension 60 L=1000 incl. breaket (UK Only) | EKFGP1286 |
| Roof Terminal PP/GLV 60/100 AR460 | EKFGP6837 |
| Roof Terminal PP/GLV 80/125 AR300 Ral-9011 | EKFGP6864 |
| Spacer PP 80-100 | EKFGP6333 |
| Support Breaket Top Inox Dn.100 | EKFGP6337 |
| Support Breaket Top Inox Dn.130 | EKFGP6353 |
| Tee Flex 100 Boiler Connectionset 1 | EKFGP6368 |
| Tee Flex 130 Boiler Connectionset 1 | EKFGP6215 |
| Thermistor recirculator | EKTH2 |
| Wall Bracket Dn.100 | EKFGP4481 |
| Wall Bracket Dn.100 | EKFGP4631 |
| Wall Terminal Kit low profile PP/GLV 60/100 | EKFGP1293 |
| Wall Terminal Kit low profile PP/GLV 60/100 | EKFGP2977 |
| Wall Terminal Kit PP/GLV 60/100 | EKFGP2978 |
| Wall Terminal Kit PP/GLV 60/100 | EKFGP1292 |
| Wall Terminal Kit PP/GLV 80/125 | EKFGW6359 |
| Wall Terminal Kit low profile PP/GLV 60/100 (UK only) | EKFGP1299 |
| Weather Slate Flat Alu 60/100 | EKFGP6940 |
| Weather Slate Flat Alu 60/100 0°-15° | EKFGP1296 |
| Weather Slate Flat Alu 80/125 | EKFGW5333 |
| Weather Slate Flat Alu 80/125 0°-15° | EKFGP1297 |
| Weather Slate Steep Pb/GLV 60/100 18°-22° | EKFGS0518 |
| Weather Slate Steep Pb/GLV 60/100 23°-27° | EKFGS0519 |
| Weather Slate Steep Pb/GLV 60/100 43°-47° | EKFGS0523 |
| Weather Slate Steep Pb/GLV 60/100 48°-52° | EKFGS0524 |
| Weather Slate Steep Pb/GLV 60/100 53°-57° | EKFGS0525 |
| Weather Slate Steep Pb/GLV 80/125 18°-22° | EKFGT6300 |
| Weather Slate Steep Pb/GLV 80/125 23°-27° | EKFGT6301 |
| Weather Slate Steep Pb/GLV 80/125 43°-47° | EKFGT6305 |
| Weather Slate Steep Pb/GLV 80/125 48°-52° | EKFGT6306 |
| Weather Slate Steep Pb/GLV 80/125 53°-57° | EKFGT6307 |
| Weather Slate Steep PF 60/100 25°-45° | EKFGP7910 |
| Weather Slate Steep PF 80/125 25°-45° Ral-9011 | EKFGP7909 |
| Elbow PP 60/100 90° + MP Generic | DR90ELB060100AA |
| Wall term Mugro STD 60/100 Telescopic | DRWTER60100AA |

Flue gas connections



Daikin Altherma H Hybrid

The best of 2 worlds

Heat pump



H₂O

Condensing Boiler



Environmentally friendly

- › Reduced environmental impact thanks to the usage of R-32 refrigerant
- › Outdoor unit with **sealed refrigerant circuit**, which greatly reduces the risk of refrigerant leakage



Easy & Quick installation

All hydraulics components are outside.



No F-gas licence required

Only water connections between outdoor and indoor unit. Therefore no F-gas certification is needed for the installer.

Safety in every conditions

The unit can work down to -15°C outside thanks to multiple freeze-up protections



Flexible installation

Compact indoor unit can be installed in a cupboard.



Condensing technology

The condensing technology uses optimum fuel efficiency, with reduced emissions of NOx and CO, to ensure high cost savings and environmentally-friendly operation.



Plug & play

No need of other parts, the pump group is integrated inside.

BLUEEVOLUTION

The Blueevolution technology combines very high efficient compressors developed by Daikin with the future of refrigerants: R-32.

Installation possibilities

The Daikin Altherma H Hybrid is made of an outdoor unit of 4 kW:



The Daikin Altherma H Hybrid is made of a boiler of 28 or 32 kW:



For more domestic hot water production, you can combine the Daikin Altherma H Hybrid with multiple tank options:

Pressureless tanks with solar support

Connect your unit to a ECH₂O thermal store and take advantage of the energy of the sun.



Pressurized tanks

Connect your unit with our full range of stainless steel tanks to answer all needs



Heat pumps

Controls


EKRUHML1/2

Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning: intuitive interface for advanced menu settings

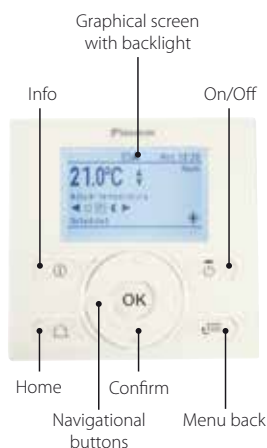

Daikin online controller

Daikin Online Heating Control


The Daikin Online Control Heating app is a multifaceted programme that allows customers to control and monitor the status of their heating system.



Applications


1. Standard hybrid operation

With this application, the system works in a perfect balance between the gas boiler and the heat pump to provide space heating and domestic hot water. Here, the boiler is able to heat directly the water without a tank.

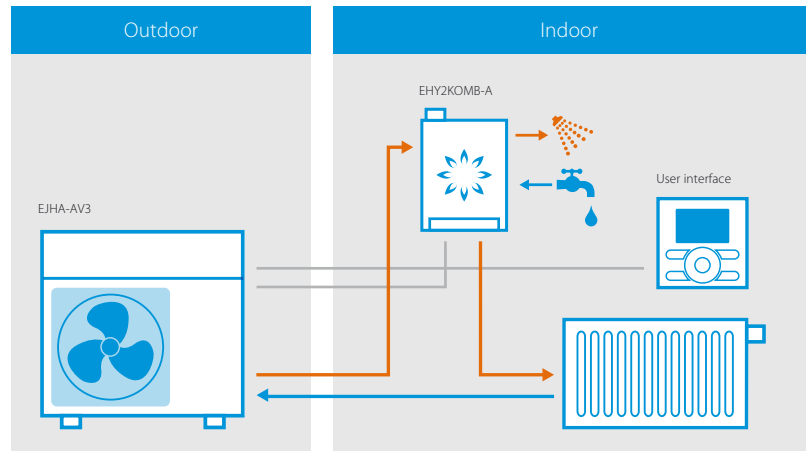


1.1 Standard hybrid operation with a tank

In this application, a domestic hot water tank can be added if the system needs to provide high quantity of domestic hot water produced either by the heat pump or by the boiler.

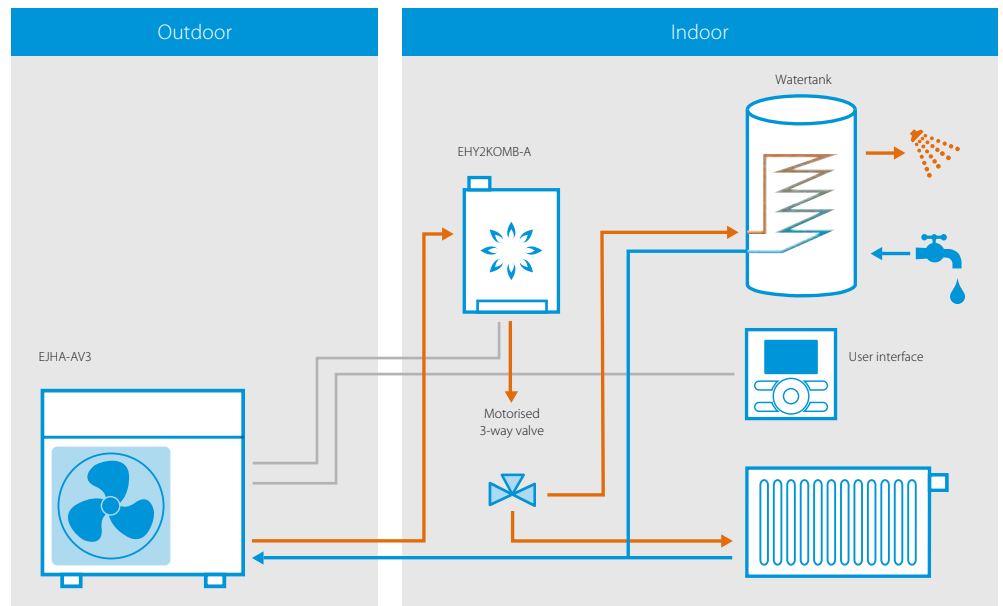

2. Add-on operation

Daikin Altherma H Hybrid outdoor unit can be combined with an existing boiler. In such application, the system works in bivalent operation, meaning that this is strictly the heat pump or the boiler that is providing the required heat while in the standard applications, both can work at the same time.

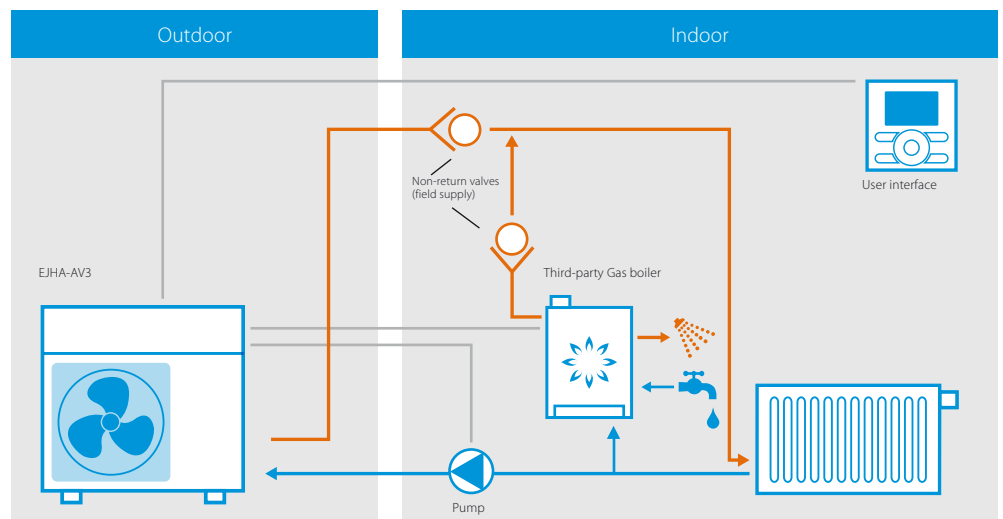



Daikin Altherma Hybrid hydrosplit heat pump

Hybrid technology combining condensing gas and air to water heat pump for heating and hot water













- › Heating only models
- › Depending on outdoor temperature, energy prices and internal heat load, the Daikin Altherma H Hybrid always selects the most economical mode to operate
- › Low investment cost: no need to replace the existing radiators (up to 80°C) and pipe work
- › Provides sufficient heat in renovation applications as all heat loads are covered up to 32kW
- › Easy and fast installation thanks to the compact dimensions and water connections



| Efficiency data | | | | | EHY2KOMB28AA + EJHA04AAV3 | | EHY2KOMB32AA + EJHA04AAV3 | |
|------------------------------|---|---------------------------------|--|---------------------|--------------------------------------|-------|---------------------------|----|
| Heating capacity | Nom. | | | kW | 3.83 (1) | | | |
| Power input | Heating | Nom. | | kW | 0.85 (1) | | | |
| COP | | | | | 4.49 (1) | | | |
| Space heating | Average climate water outlet 55°C | General | SCOP | | 3.26 | 3.28 | | |
| | | | ηs (Seasonal space heating efficiency) | % | 127.6 | 128.1 | | |
| | | | Seasonal space heating eff. class | | | A++ | | |
| Space heating | Average climate water outlet 35°C | General | SCOP | | 4.14 | 4.15 | | |
| | | | ηs (Seasonal space heating efficiency) | % | 162.6 | 163 | | |
| | | | Seasonal space heating eff. class | | | A++ | | |
| Domestic hot water heating | General | Declared load profile | | | XL | | | |
| | | Average climate | ηwh (water heating efficiency) | % | 87 | | | |
| | | | Water heating energy efficiency class | | A | | | |
| Indoor unit | | | | | EHY2KOMB28AA | | EHY2KOMB32AA | |
| Central heating | Heat input Q _n (net calorific value) | Nom | Min/Max | kW | 8.0 / 26.3 | | 8.3 / 30.0 | |
| | Output P _n at 80/60°C | Min/Nom | | kW | 7.1 / 23.1 | | 7.4 / 26.6 | |
| | Efficiency | Net calorific value 80/60 | | % | 97 | | 98 | |
| | Efficiency | Net calorific value 37/30 (30%) | | % | | | >107 | |
| | Operation range | Min/Max | | °C | 30 / 90 | | 40/65 | |
| Domestic hot water | Output | Min/Nom | | kW | 7.2 / 29.1 | | 7.6 / 32.7 | |
| | Water flow | Rate 60°C | Nom | l/min | 7.5 | | 9.0 | |
| | Water flow | Rate 40°C | Nom | l/min | 12.5 | | 15.0 | |
| | Operation range | Min/Max | | °C | 40/65 | | 40/65 | |
| | Gas | Connection | Diameter | | mm | 15 | | 15 |
| Consumption (G20) | | Min/Max | | m ³ /h | 0.74 / 3.02 | | 0.79 / 3.39 | |
| Consumption (G31) | | Min/Max | | m ³ /h | 0.28 / 1.15 | | 0.30 / 1.19 | |
| Supply air | Connection | | | mm | 100 | | 100 | |
| | Concentric | | | | 1 | | 1 | |
| Flue gas Casing | Connection | | | mm | 60 | | 60 | |
| | Colour | | | | White - RAL9010 | | White - RAL9010 | |
| | Material | | | | Precoated sheet metal | | Precoated sheet metal | |
| Dimensions | Unit | HxWxD | Casing | mm | 650x450x240 | | 710x450x240 | |
| Weight | Unit | Empty | | kg | 33 | | 36 | |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | 1~/50/230 | | 1~/50/230 | |
| Electrical power consumption | Max. | | | W | 110 | | 110 | |
| | Standby | | | W | 2 | | 2 | |
| Outdoor unit | | | | | EJHA04AAV3 | | | |
| Dimensions | Unit | | HxWxD | mm | 745x845x329 | | | |
| Weight | Unit | | | kg | 45 | | | |
| Compressor | Quantity | | | | 1 | | | |
| | Type | | | | Hermetically sealed swing compressor | | | |
| Operation range | Heating | | Min.~Max. | °CWB | -15~-25 | | | |
| | Type | | | | R-32 | | | |
| Refrigerant | GWP | | | | 675 | | | |
| | Charge | | | kg | 0.56 | | | |
| | Charge | | | TCO ₂ Eq | 0.38 | | | |
| Sound power level | Heating | | Nom. | dBA | 58.7 | | | |
| Sound pressure level | Heating | | Nom. | dBA | 37 | | | |
| Power supply | Name/Phase/Frequency/Voltage | | | Hz/V | V3/1~/50/220-240 | | | |
| Current | Recommended fuses | | | A | 20 | | | |

(1) Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C)

Options - system















| Group | Description | Material name |  Pair Hybrid |  Add-on Hybrid |
|---|---|---------------------------|---|---|
| Controls |  User interface: English – Dutch – Italian – French | EKRUHML1 | • | • |
| | User interface: English – Dutch – Italian – German | EKRUHML2 | • | • |
| |  Gateway 1: I/O version | DCOM-LT/IO ⁽²⁾ | • | • |
| |  Gateway 2: Modbus version | DCOM-LT/MB ⁽²⁾ | • | • |
| |  LAN + PV Solar (installation box EKBRPA6 available) | BRP069A61 | • | |
| | LAN only (installation box EKBRPA6 available) | BRP069A62 | • | |
| |  Wired room thermostat | EKRTWA | • | |
| |  Wireless room thermostat | EKRTR1 | • | |
|  External room sensor | EKRTETS ⁽⁴⁾ | • | | |
| Sensor | Remote outdoor sensor | EKRSCA1 ⁽³⁾ | • | • |
| Other |  Thermistor kit for pressurised tanks & 3rd party tank | EKTH3 | | |
| |  Thermistor kit for pressureless tanks | EKTH4 | | |
| | Bottom plate heater (dedicated type) | EKBPHT04JH | • | • |
| | Ball valves | EKBALLV1 | • | • |
| | Add-on: pump | EKADDONJH | | • |
| | Add-on: cable + 2 non-return valves | EKADDONJH2 | | • |
| | PC USB cable | EKPCCAB(1/2/3) | • | |
| |  Connection kit for 3 rd party tank | EKH3PART | • | |
| | Connection kit for pressureless tank | EKDVCPLT3HX | • | |
| Heat pump convector valve kit | EKVHPC | • | • | |

(2): compatible with EKRUHML user interface

(3): Only 1 sensor can be connected: indoor OR outdoor sensor

(4): Can only be used in combination with the wireless room thermostat EKRTR1

Options - boiler

| Accessory | Sales region | Material name |   | | |
|--|---|------------------------|---|-------|---|
| | | | 23 kW | 27 kW | |
| Boiler options |  | IT, ES, CZ, GR, PL, PT | EKFJM1A | • | |
| | | IT, ES, CZ, GR, PL, PT | EKFJL1A | | • |
| |  | FR, BE | EKFJM2A | • | |
| | | FR, BE | EKFJL2A | | • |
| |  | UK | EKFJM3A | • | |
| | | UK | EKFJL3A | | • |
| |  | DE | EKFJM6A | • | |
| | | DE | EKFJL6A | | • |
| |  | IT, ES, CZ, GR, PL, PT | EKVK4A | • | • |
| |  | DE | EKVK6A | • | • |
| Filling loop set |  | All | EKFL1A | • | • |
| 3 way valve kit |  | All | EK3WV1AA ⁽²⁾ | • | • |
| Solar water heater connection set (cable + probe sensor) | | All | EKSH1A | • | • |
| Concentric connection Ø 80/125 |  | All | EKHY090717 | • | • |
| Eccentric connection Ø 80 | | All | EKHY090707 | • | • |
| Dongle set (wireless connection from PC to boiler) |  | All | EKDS1A | • | • |
| Cover plates |  | All | EKCP1A | • | • |
| | | All | EKHY093467 ⁽¹⁾ | • | • |
| Propane sets (G31) | | All | EKHY075787 | | • |
| | | All | EKPS075867 | • | |
| Conversion kits (G25) |  | DE, BE, FR | EKPS076217 | • | |
| | | DE, BE, FR | EKPS076227 | | • |

Heat pumps

(1): cannot be used in combination with B-packs

(2): Thermistor kit for pressureless tank (compatible with EKHWS* and 3rd party tank) is also included. This kit can be used when boiler and tank is within 2 m distance.

| Type | Material name |
|--|---------------|
| Adapter Flex-Fixed PP 100 | EKFGP6316 |
| Adapter Flex-Fixed PP 130 | EKFGS0252 |
| Chimney Connection 60/100 | EKFGP4678 |
| Chimney Connection 60/100 | EKFGP4678 |
| Chimney Connection 80/125 | EKFGP4828 |
| Chimney Connection 60/10 Air Intake Dn. 80 C83 | EKFGV1101 |
| Chimney Top PP 100 incl. Flue Pipe | EKFGP5497 |
| Chimney Top PP 130 incl. Flue Pipe | EKFGP5197 |
| Concentric connection Ø 80/125 | EKH-Y090717 |
| Connector Flex-Flex PP 100 | EKFGP6325 |
| Connector Flex-Flex PP 130 | EKFGP6366 |
| Connector Flex-Flex PP 80 | EKFGP6324 |
| Connection set 60/10-60 Flue/Air intake Dn. 80 C53 | EKFGV1102 |
| Eccentric connection Ø 80 | EKH-Y090707 |
| Elbow PP/ALU 80/125 90° | EKFGP4810 |
| Elbow PP/GLV 60/100 30° | EKFGP4664 |
| Elbow PP/GLV 60/100 45° | EKFGP4661 |
| Elbow PP/GLV 60/100 90° | EKFGP4660 |
| Elbow PP/GLV 80/125 30° | EKFGP4814 |
| Elbow PP MB-AIR 80 90° | EKFGW4085 |
| Elbow PP BM-AIR 80 45° | EKFGW4086 |
| Extension Flex PP 100 L=10 M | EKFGP6346 |
| Extension Flex PP 100 L=15 M | EKFGP6349 |
| Extension Flex PP 100 L=25 M | EKFGP6347 |
| Extension Flex PP 130 L=30 M | EKFGS0250 |
| Extension Flex PP 80 L=10 M | EKFGP6340 |
| Extension Flex PP 80 L=15 M | EKFGP6344 |
| Extension Flex PP 80 L=25 M | EKFGP6341 |
| Extension Flex PP 80 L=50 M | EKFGP6342 |
| Extension PP 60x500 | EKFGP5461 |
| Extension PP/GLV 60/100 x 1000mm | EKFGP4652 |
| Extension PP/GLV 60/100 x 500mm | EKFGP4651 |
| Extension PP/GLV 80/125 x 10000mm | EKFGP4802 |
| Extension PP/GLV 80/125 x 500mm | EKFGP4801 |
| Extension P BM-Air 80x500 | EKFGW4001 |
| Extension P BM-Air 80x1000 | EKFGW4002 |
| Extension P BM-Air 80x2000 | EKFGW4004 |
| Filling loop set | EKFL1AA |
| Flex 100-60 + Support Elbow | EKFGP6354 |
| Flex 130-60 + Support Elbow | EKFGS0257 |
| Flex Kit PP Dn.60-80 | EKFGP1856 |
| Flex Kit PP Dn.8 | EKFGP2520 |
| Flue Deflector 60 (UK Only) | EKFGP1295 |
| Flue gas non-return flap | EKFGF1A |
| Gas conversion kit from G20 to G25 | EKPS076227 |

Flue gas connections

| Type | Material name |
|---|-----------------|
| Inspection Elbow Plus PP/ALU 80/125 90° EPDM | EKFGP4820 |
| Meas. Tee with Inspection Panel PP/GLV 60/100 | EKFGP4667 |
| Plume Managment Kit 60 (UK Only) | EKFGP1294 |
| PMK Elbow 60 45° (2 pcs) (UK Only) | EKFGP1285 |
| PMK Elbow 60 90 (UK Only) | EKFGP1284 |
| PMK Extension 60 L=1000 incl. breetak (UK Only) | EKFGP1286 |
| Roof Terminal PP/GLV 60/100 AR460 | EKFGP6837 |
| Roof Terminal PP/GLV 80/125 AR300 Ral-9011 | EKFGP6864 |
| Spacer PP 80-100 | EKFGP6333 |
| Support Breetak Top Inox Dn.100 | EKFGP6337 |
| Support Breetak Top Inox Dn.130 | EKFGP6353 |
| Tee Flex 100 Boiler Connectionset 1 | EKFGP6368 |
| Tee Flex 130 Boiler Connectionset 1 | EKFGP6215 |
| Thermistor recirculator | EK TH2 |
| Wall Bracket Dn.100 | EKFGP4481 |
| Wall Bracket Dn.100 | EKFGP4631 |
| Wall Terminal Kit low profile PP/GLV 60/100 | EKFGP1293 |
| Wall Terminal Kit low profile PP/GLV 60/100 | EKFGP297 7 |
| Wall Terminal Kit PP/GLV 60/100 | EKFGP2978 |
| Wall Terminal Kit PP/GLV 60/100 | EKFGP1292 |
| Wall Terminal Kit PP/GLV 80/125 | EKFGW6359 |
| Wall Terminal Kit low profile PP/GLV 60/100 (UK only) | EKFGP1299 |
| Weather Slate Flat Alu 60/100 | EKFGP6940 |
| Weather Slate Flat Alu 60/100 0°-15° | EKFGP1296 |
| Weather Slate Flat Alu 80/125 | EKFGW5333 |
| Weather Slate Flat Alu 80/125 0°-15° | EKFGP1297 |
| Weather Slate Steep Pb/GLV 60/100 18°-22° | EKFGS0518 |
| Weather Slate Steep Pb/GLV 60/100 23°-27° | EKFGS0519 |
| Weather Slate Steep Pb/GLV 60/100 43°-47° | EKFGS0523 |
| Weather Slate Steep Pb/GLV 60/100 48°-52° | EKFGS0524 |
| Weather Slate Steep Pb/GLV 60/100 53°-57° | EKFGS0525 |
| Weather Slate Steep Pb/GLV 80/125 18°-22° | EKFGT6300 |
| Weather Slate Steep Pb/GLV 80/125 23°-27° | EKFGT6301 |
| Weather Slate Steep Pb/GLV 80/125 43°-47° | EKFGT6305 |
| Weather Slate Steep Pb/GLV 80/125 48°-52° | EKFGT6306 |
| Weather Slate Steep Pb/GLV 80/125 53°-57° | EKFGT6307 |
| Weather Slate Steep PF 60/100 25°-45° | EKFGP7910 |
| Weather Slate Steep PF 80/125 25°-45° Ral-9011 | EKFGP7909 |
| Elbow PP 60/100 90° + MP Generic | DR90ELBO60100AA |
| Wall term Mugro STD 60/100 Telescopic | DRWTERT60100AA |

Flue gas connections

Table of content

boilers

- Condensing boilers 122
- Gas condensing boilers 124
 - Daikin Altherma 3 C Gas W..... 124
 - Daikin Altherma C Gas W 130
 - Daikin Altherma C Gas ECH₂O132
- Daikin Altherma C Oil 136
- Flue gas evacuation system..... 142



Condensing boilers

Why choose a condensing boiler

Daikin's gas or oil condensing boilers are the best option for individual that plan to replace an existing boiler with a more energy efficient and cost-saving alternative. Both the GCU compact and Wall Mounted Boiler provide end users with reliable performance and efficient heating and hot water.

✓ Comfort

Daikin's gas condensing boilers deliver the ultimate in comfort. Optimal heating ensures seamless operation to deliver reliable year-round heating, even in extreme weather conditions. Instant hot water is possible with our combi range, but also possible with a separate thermal store featuring the ECH₂O tank.

✓ Energy efficiency

Condensing technology

Using latent heat in the flue gas, our condensing technology achieves 107% more energy efficiency by using renewable energy to produce hot water.

Condensing technology

Premix Technology incorporates a modulation fan to perfectly combine combustion air and fuel before it reaches the burner (air/gas mixer), to ensure a high efficiency combustion.

With the combustion of 1 m³ natural gas, 1.7 kg of water vapour is released in the flue gas as latent heat. Instead of being disposed through the flue, the water vapour containing latent heat is then recirculated, and subsequently reheated by a uniquely designed exchanger.


Condensation forms as a result of the water vapour being cooled to a temperature just below dew point, and subsequently drained via a siphon. The condensing technology uses optimum fuel efficiency, with reduced emissions of NO_x and CO, to ensure high cost savings and environmentally-friendly operation.



✓ Flexibility

Easy installation and service

All parts are accessible from the front and are low maintenance. The flue gas installation can be adapted to all kinds of configuration thanks to its flexibility.

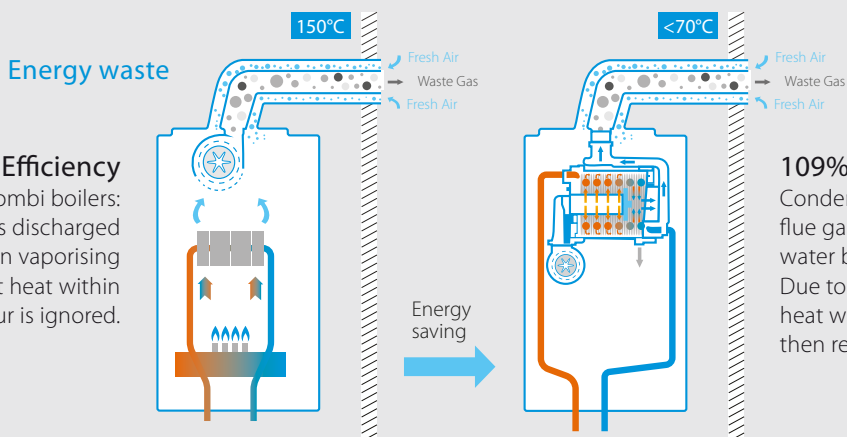

93% Efficiency

Conventional combi boilers: Water vapour is discharged through the flue in vaporising phase and latent heat within the water vapour is ignored.

109% Efficiency

Condensing combi boilers: the flue gas collides with influent water before being discharged. Due to this occurrence, latent heat within the water vapour is then released.

Daikin Altherma 3 C Gas W

Wall mounted gas condensing boiler



Why choose the Daikin gas condensing boiler?

Low weight

27 kg

Connectivity/Cloud Service

Always in control, no matter where you are.

Easy installation and service

All parts are accessible from the front. The gas-adaptive combustion system (Lambda Gx) means lower maintenance and installation time in a minimalist space. The Lambda Gx is compatible with wall mounted and floor standing units.

Solar thermal connection

Usable in combination with solar thermal store (renewable energy)

- › Combi boiler: solar preheating
- › Heating only boiler: solar controller input



Flexible in use

Thanks to IPX5D standard and its compact dimensions, it's possible to install in nearly all room conditions, such as kitchen cupboards, bathroom, utility room, heating room, balcony (in-wall kit).

Modulation 1:8

Capacity adapts to required heat of 4 to 28 kW and 5 to 35 kW

Daikin eye

Monitor the operating status of your combi boiler with the Daikin Eye

Unique interface


- › Stylish interface appeals to all end-users
- › State-of-the-art technology meets user-friendly design
- › The side details and convex front panel deliver an integrated view

Most compact

12, 18, 24 kW: 400 x 255 x 580 mm
28, 35 kW: 450 x 288 x 666 mm

✓ High modulation rate


The opportunity to adjust the burner power ensures the seamless and continuous operation of the device. Smooth functioning of the system means increased comfort, a low risk for system failure and the ability to neutralise harmful substance emissions that may occur during ignition. Modulation is also automatically provided by the electronic control.

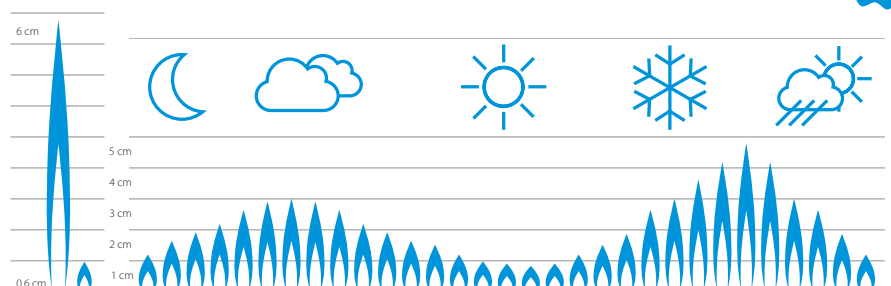



✓ Lambda Gx: automatic gas adaptation system

With the Lambda GX, the correct combination of air and gas is regulated to achieve efficient combustion, which leads to higher cost savings and less installation and adjustment effort. With Lambda Gx, you have the advantage that you need no other parts like a gas cover to change from natural gas (NG) to liquid gas (LPG).

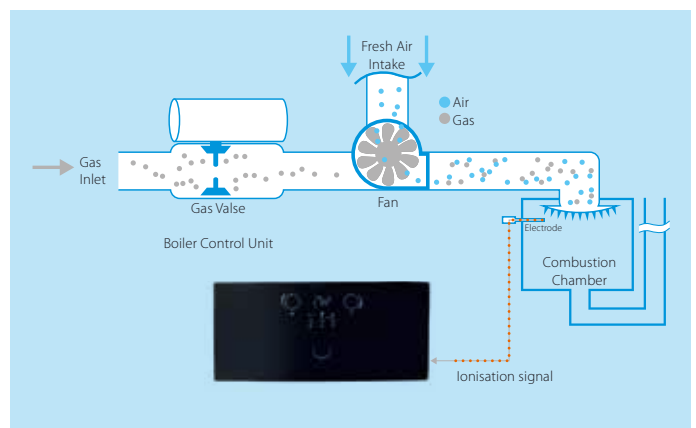

Boilers

✓ Daikin Eye

You can monitor the operating status of your combi boiler with the Daikin Eye



Blue:

When the Daikin Eye indicates a blue colour, it means the boiler is functioning properly. The Daikin Eye will flash on and off when it's running on stand by mode.



Red:

When the Daikin Eye indicates a red colour, it means the boiler is out of commission and requires a maintenance check.

✓ Product features

Flue Adapter 60/100

- › Factory mounted
- › Compatible with top adapters/elbows of different flue gas manufacturers
- › With measurement wholes for air and flue gas

Heat Exchanger

- › Daikin design
- › Material: Aluminium
- › Modulation:
 - 12-18-24 kW (1:4 - 1:6 - 1:8)
 - 28-35 kW (1:4 - 1:7)

Expansion Vessel

- › Integrated
- › 12-18-24 kW: 8 liters
- › 28-35 kW: 10 liters

Gas Valve

- › Less maintenance needed
- › Automatic gas adaptive system
- › No additional parts/tools for changing from NG to LPG.

Domestic Hot Water Plate Heat Exchanger

Increased number of plates to provide faster hot water production at high efficiency including warm start function.

Pump & Return Hydroblock

Includes filter and flow restrictor
Air vent, drain tap and Internal bypass
Low energy pump

Fan

Wide modulation range
Low noise

✓ Small gas condensing combi boiler

The smallest Combi boiler
(12-18-24 kW)


Lightweight Combi boiler
(28-35 kW)



reddot award 2018
winner


Easy installation & maintenance

The small and lightweight combi boiler guarantees fast installation, minimal maintenance and a flexible system to adapt to various rooms.

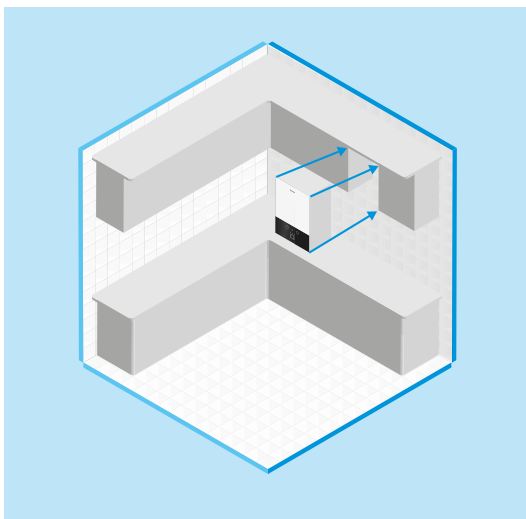

High energy class


Energy Class A adheres to European ERP Standards

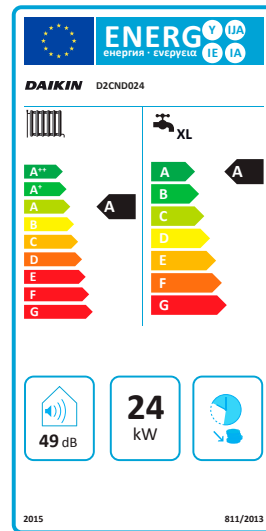

Silence

Sound power: 49 db(A): The sound power is the sound level heard when you are close to the unit. The sound level is similar to heating a dishwasher operating in an adjacent room.

Sound Pressure: 39 db(A): The sound pressure is the sound level heard when you are standing 1 meter from the unit. The sound level is akin to the quiet environment of a library.

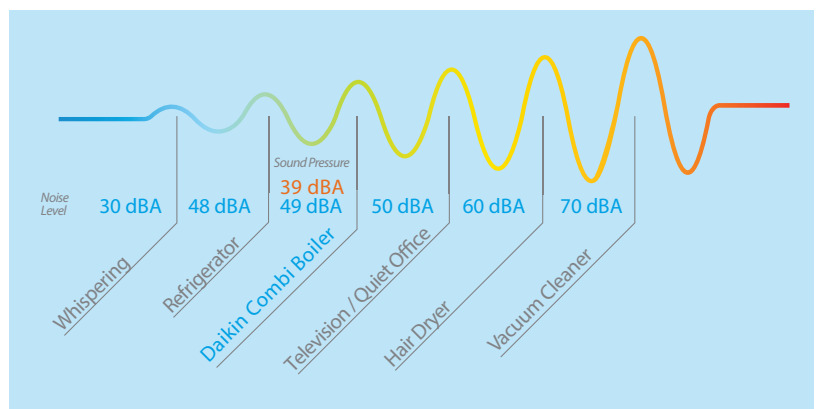



Best for your home with compact dimensions



Capacity
T-Model: 12-18-24-28-35 kW
C-Model: 24-28-35 kW



Modulation
The device can drop down to 3 kW with a modulation ratio of 1:8. This ensures minimal energy is consumed during start/stop operations.



Full condensation
Latent heat from the flue gas is obtained and added to the system, leading to both increased efficiency and energy savings.



Comfort mode
The DK combi boiler is designed to provide optimal comfort levels.



Electrical Protection
Safe combi boiler with a protection class of IP5D.



Efficiency
Achieves up to 109% efficiency with full condensation.



Frequency controlled pump
The frequency control monitors power consumption to boost efficiency and save energy.



Quiet
Delivers a very low sound level that reflects the new EU standards.



Thermo regulation
The device runs the system based on data obtained from the outside temperature sensor and room thermostat.



Compact size
Measuring only 0.06 m³, this slim, state-of-the-art design combines power with aesthetics.



High energy class
Efficiency class according to EU Ecodesign Lot1. (A)



Lambda Gx system
Superior combustion technology delivers unparalleled efficiency and energy savings.



Premix combustion
Achieves an efficient combustion process by creating the perfect combination of air and gas before it reaches the burner.



Lcd display
Eye-catching and user-friendly design.



Double heat exchanger
The device uses a Daikin-specific main exchanger equipped with in-house technology and a stainless steel domestic water exchanger.



Easy maintenance
Details in design allows for easy maintenance.



Online controller via app
Control your indoor unit from any location via app (optional WLAN adapter)

Gas condensing boiler













Supremely compact gas condensing boiler

- › Very compact unit and flexible in use: possible to install in nearly all room conditions (inside the house as well as outside) thanks to freeze protection for water piping
- › Easy to service: all parts are accessible by only removing the front panel
- › High heating efficiency up to 108%
- › High modulating range 1:8 : the capacity is adapted based on the required heat load of the house from 3 to 24 kW and 5 to 35 kW
- › Combine it with solar heating for even better energy efficiency
- › C-model: The combi model means that the boiler has a plate heat exchanger to provide instant domestic hot water.
- › T-model (tank): The tank model means that the boiler does not have a plate heat exchanger. Domestic hot water is provided by an external storage tank heated by the boiler.
- › A1 model means that the filling loop is internal.
- › A4 model means that the filling loop is external.



| Indoor unit | | | D2 | TND012A4A | TND018A4A | TND024A4A | TND028A4A | TND035A4A | CND024A1A | CND028A4A | CND035A1A | | | | | | |
|--|---|--|---------|--------------------------|----------------|-----------|------------|------------|---------------------------------------|------------|-------------|----------|---------------------------------------|----|--|-----|--|
| Central heating | Heat input Qn Nom (net calorific value) | Min/Max | kW | 2.9/11.2 | 2.9/17.0 | 2.9/23.5 | 4.8/27 | 4.8/34 | 2.9/23.5 | 4.8/27 | 4.8/34 | | | | | | |
| | Heat input Qn (gross calorific value) | Nom | Min/Max | kW | 3.2/12.4 | 3.2/18.9 | 3.2/26.1 | 5.3/30 | 5.3/37.8 | 3.2/26.1 | 5.3/30 | 5.3/37.8 | | | | | |
| | Output Pn at 80/60°C | Min/Nom | | kW | 2.8/10.9 | 2.8/16.6 | 2.8/22.8 | 4.6/26.3 | 4.6/33.2 | 2.8/22.8 | 4.6/26.3 | 4.6/33.2 | | | | | |
| | Output Pnc at 50/30°C | Min/Nom | | kW | 3.1/12.0 | 3.1/18.0 | 3.1/24.0 | 5.2/28.2 | 5.2/35 | 3.1/24.0 | 5.2/28.2 | 5.2/35 | | | | | |
| | Water pressure (PMS) | Max | | bar | 3 | | | | | | | | | | | | |
| | Water temperature | Max | | °C | 100 | | | | | | | | | | | | |
| | Efficiency | Net calorific value | | % | 98.6 | 98.2 | 97.9 | 98.2 | | 97.9 | - | - | | | | | |
| | Operation | Min/Max | | °C | 30/80 | | | | | | | | | | | | |
| | Piping connections | | | | 19 (3/4") Male | | | | | | | | | | | | |
| | Domestic hot water | Heat input (net calorific value) Qnw | Nom | Min/Max | kW | 2.9/11.2 | 2.9/17.0 | 2.9/23.5 | 4.8/29.5 | 4.8/34 | 2.9/23.5 | 4.8/29.5 | 4.8/34 | | | | |
| Heat input (gross calorific value) Qnw | | Nom | Min/Max | kW | 3.2/12.4 | 3.2/18.1 | 3.2/26.1 | 5.3/32.7 | 5.3/37.7 | 3.2/26.1 | 5.3/32.7 | 5.3/37.7 | | | | | |
| Domestic hot water threshold | | | | l/min | - | | | 2.5 | | 2.0 | 2.5 | | | | | | |
| Temperature | | Factory setting | | °C | 50 | | | | | | | | | | | | |
| Operation | | Min/Max | | °C | 35/60 | | | | | | | | | | | | |
| Piping connections | | | | 19 (3/4") Male | | | | | | | | | | | | | |
| Connection diameter for heat flow and return | | | | 12.7 (1/2") Male | | | | | | | | | | | | | |
| Gas | Connection diameter | | | mm | | | | | | | | | | | | | |
| | Gas connection diameter | | | mm | | | | | | | | | | | | | |
| | Consumption (G20) | Min/Max | m³/h | 0.31/1.18 | 0.31/1.80 | 0.31/2.48 | 0.511/2.89 | 0.511/3.63 | 0.31/2.48 | 0.511/2.89 | 0.511/3.63 | | | | | | |
| | Consumption (G25) | Min/Max | m³/h | 0.36/1.38 | 0.36/2.09 | 0.36/2.89 | 0.59/3.32 | 0.59/4.19 | 0.36/2.89 | 0.59/3.32 | 0.59/4.19 | | | | | | |
| Supply air | Consumption (G31) | Min/Max | m³/h | 0.12/0.46 | 0.12/0.69 | | 0.2/1.1 | 0.2/1.38 | 0.12/0.96 | 0.2/1.1 | 0.2/1.38 | | | | | | |
| | Connection | | | mm | | | | | | | | | | | | | |
| Flue gas | Concentric | | | 100 | | | | | | | | | | | | | |
| | Connection | | | 60 | | | | | | | | | | | | | |
| Space heating | General | ns (Seasonal space heating efficiency) | % | 93 | | | | | | | | | | | | | |
| | | Seasonal space heating eff. class | | A | | | | | | | | | | | | | |
| Domestic hot water heating | General | Declared load profile | | - | | | | | | | | | | | | | |
| | | rw (water heating efficiency) | % | - | | | | | | | | | | | | | |
| Casing | Colour | Material | | Titanium White (Ral9003) | | | | | | | | | | | | | |
| | | | | | Sheet metal | | | | Powder painted galvanised steel plate | | Sheet metal | | Powder painted galvanised steel plate | | | | |
| Dimensions | Unit | Height x Width | Casing | mm | 590x400x256 | | | | | | | | | | | | |
| | | x Depth | | | | | | | | | | | | | | | |
| Weight | Unit | Empty | kg | 27 | | | | 36 | | 27 | | 37 | | | | | |
| | | Phase/Frequency/Voltage | Hz/V | 1~/50/230 | | | | 1~/50/230 | | 1~/50/230 | | | | | | | |
| Electrical power consumption | Max. | Standby | W | 86 | | | | 92 | | 112 | | 86 | | 92 | | 112 | |
| | | | W | 3.5 | | | | 2.7 | | 3.5 | | 2.7 | | | | | |

Options

| Category | | Description | Material Nr |
|--------------------------|---|---|-------------------------|
| Controls |  | Outdoor sensor | 150042 |
| | | Solar Temperature Sensor | DRSLRTESENSAA |
| |  | Daikin OT+ room thermostat | DOTROOMTHEAA |
| |  | Communication gateway | DRGATEWAYAA |
| System control - Cascade |  | Cascade Controller (E8.5064 V1) | DRCASCACONTAA |
| |  | Zone Controller (E8.1124) | DRZONECCONTAA |
| |  | CoCo OT-CAN Adapter | DRCOCOADPTRAA |
| |  | Lago CAN BUS room thermostat | DRCBROOMTHEAA |
| | | Flow temperature sensor (Cascade) | DRFLWTESENSAA |
| | | Outdoor temperature sensor (Cascade) | DRODRTESENSAA |
| | | Storage Tank Temperature Sensor (Cascade) | DRSTKTESENSAA |
| Flue gas |  | Connector Elbow PP 60/100 + MP(0mm) | DRMEEA60100BA |
| |  | Twin Box Adapter 80/80 + MP(0mm) | DRDECOP8080BA |
| |  | Vert. Conn. 60/100-80/125 + MP(0mm) | DRDECO80125BA |
| Mechanical |  | Cover plate (12-18-24 kW) | DRCOVERPLATAA |
| | | Cover plate (28-35 kW) | DRCOVERPLA2AA |
| | | Antifreezing set | DRANTIFREEZAA |
| Valve kit | | Valve Kit C1 - 90° valves | DRVALVEKIC1AA |
| | | Valve Kit C2 - 90° valves | DRVALVEKIC2AA |
| | | Valve Kit T1 - 90° valves | DRVALVEKIT1AA |
| | | Valve Kit T2 - 90° valves | DRVALVEKIT2AA |
| Pump Groups & Other |  | Seperator for mud and magnetit | SAS1 156021 |
| | | Seperator for mud and magnetit | IT.DEFANG-TP |
| | | Seperator for mud and magnetit | IT-DEFANG-OT |
| |  | Unmixed Pump Group | DRUPUMPGRUPAA |
| | | Mixed Pump Group | DRMPUMPGRUPAA |
| For service | | Service box | DRSERVCBOX1AA - 5020177 |

Gas condensing boiler

High efficiency gas condensing boiler for heating and hot water

- › High efficiency gas condensing boiler
- › Top efficiency gas condensing boiler thanks to labyrinth fin heat exchanger for improved heat exchange
- › Low running costs for both heating and hot water thanks to new dual heat exchanger
- › Maximum heating comfort and domestic hot water when it is most needed
- › Quick, easy and compact installation thanks to our optional pre-assembled B-pack, containing all auxiliary components



| Indoor unit | | | | EHOB(G) | 12A | 18A | 12AH | 18AH | 42AH |
|------------------------------|---------------------------------------|--|----------|-------------------|-----------------------|-----------|-----------|-----------|-------------|
| Central heating | Heat input Qn (net calorific value) | Nom | Min/Max | kW | 3.5/12.5 | 5.6/18.7 | 3.5/11.8 | 5.6/18.7 | 7.8/42.5 |
| | Heat input Qn (gross calorific value) | Nom | Min/Max | kW | 3.9/13.9 | 6.2/20.8 | 3.9/13.1 | 6.2/20.8 | 7.8/42.5 |
| | Output Pn at 80/60°C | Min/Nom | | kW | -/12.2 | -/17.8 | 3.4/11.5 | 5.4/17.8 | -/40.9 |
| | Output Pnc at 50/30°C | Min/Nom | | kW | | -/- | 3.8/12.0 | 5.9/18.1 | 8.4/- |
| | Output at 40/30°C | Min | | kW | | - | 3.8 | 6.0 | - |
| | Water pressure (PMS) | Max | | bar | 3 | - | | 3 | |
| | Water temperature | Max | | °C | | - | | 90 | |
| | Efficiency | Net calorific value | | % | | 109 | | | 107 |
| | Operation range | Min/Max | | °C | | | 30/90 | | |
| | Gas | Connection | Diameter | | mm | | | 15 | |
| Consumption (G20) | | Min/Max | | m ³ /h | 0.36/1.30 | 0.58/1.94 | 0.36/1.22 | 0.58/1.94 | 0.81/4.41 |
| Consumption (G25) | | Min/Max | | m ³ /h | 0.42/1.50 | 0.67/2.25 | 0.42/1.42 | 0.67/2.25 | 0.94/5.10 |
| Supply air | Consumption (G31) | Min/Max | | m ³ /h | 0.14/0.49 | 0.22/0.74 | 0.14/0.47 | 0.22/0.74 | 0.31/1.68 |
| | Connection | | | mm | | | 100 | | |
| Flue gas | Connection | | | mm | | | 1 | | |
| | Connection | | | mm | | | 60 | | |
| Space heating | General | ηs (Seasonal space heating efficiency) | | % | 94 | 93 | 94 | 93 | 92 |
| | | Seasonal space heating eff. class | | | | | A | | |
| Casing | Colour | | | | White - RAL9010 | | | | |
| | Material | | | | Precoated sheet metal | | | | |
| Dimensions | Unit | Height x Width x Depth | Casing | mm | 590x450x240 | | | | 710x450x240 |
| Weight | Unit | Empty | | kg | 28 | | | | |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | -/50/230 | | | | |
| Electrical power consumption | Max. | | | W | 80 | | | | |
| | Standby | | | W | 2 | | | | |

| Indoor unit | | | | EKOMB(G) | 22AH | 28AH | 33AH | 22A | 28A | 33A |
|--|---------------------------------------|--|---------|-------------------|-----------------------|-------------------|-------------------|-----------------------|-------------------|-------------------|
| Central heating | Heat input Qn (net calorific value) | Nom | Min/Max | kW | 5.6/18.7 | 7.1/23.7 | 7.2/27.3 | 5.5/23.3 | 7.2/29.1 | 7.5/32.7 |
| | Heat input Qn (gross calorific value) | Nom | Min/Max | kW | 6.2/20.8 | 7.9/26.3 | 8.0/30.3 | 6.1/25.9 | 8.0/32.3 | 8.3/36.3 |
| | Output Pn at 80/60°C | Min/Nom | | kW | -/17.8 | -/22.8 | 7.1/26.3 | 5.4/22.7 | 7.1/28.4 | 7.4/32.1 |
| | Output Pnc at 50/30°C | Min/Nom | | kW | | -/- | 7.8/27.1 | 5.9/23.8 | 7.7/31.1 | 8.2/35.0 |
| | Output at 40/30°C | Min | | kW | | - | 7.7 | 5.9 | 7.7 | 8.2 |
| | Water pressure (PMS) | Max | | bar | 3 | | | | 3 | |
| | Water temperature | Max | | °C | | | | | 90 | |
| | Efficiency | Net calorific value | | % | | | 107 | | | 109 |
| | Operation range | Min/Max | | °C | | | 40/65 | | | -/- |
| | Domestic hot water | Heat input (net calorific value) Qnw | Nom | Min/Max | kW | 5.6/22.1 | 7.1/28.0 | -/- | 5.5/23.3 | 7.2/29.1 |
| Heat input (gross calorific value) Qnw | | Nom | Min/Max | kW | 6.2/24.6 | 7.9/31.1 | -/- | 6.1/25.9 | 8.0/32.3 | 8.3/36.3 |
| Output | | Min/Nom | | kW | | -/- | | 5.9/22.7 | 7.7/28.4 | 8.2/32.1 |
| Domestic hot water threshold | | | | l/min | | 1.5 | | | 1.5 | |
| Water flow | | Rate | Nom | | l/min | 10.0 (1) / 6.0(2) | 12.5 (1) / 7.5(2) | | 10.0 (1) / 6.0(2) | 12.5 (1) / 7.5(2) |
| Gas | Temperature | Factory setting | | °C | | | 60 | | | |
| | Operation range | Min/Max | | °C | | | | | | |
| | Connection | Diameter | | mm | | 15 | | | | |
| | Consumption (G20) | Min/Max | | m ³ /h | 0.58/2.29 | 0.74/2.46 | -/- | 0.57/2.42 | 0.75/3.02 | 0.78/3.39 |
| | Consumption (G25) | Min/Max | | m ³ /h | | -/- | | 0.66/2.80 | 0.86/3.50 | 0.80/3.93 |
| Supply air | Consumption (G31) | Min/Max | | m ³ /h | 0.22/0.87 | | -/- | 0.22/0.92 | 0.28/1.15 | 0.30/1.29 |
| | Connection | | | mm | | 100 | | | 100 | |
| Flue gas | Connection | | | mm | | | | | 1 | |
| | Connection | | | mm | 60 | | | | 60 | |
| Space heating | General | ηs (Seasonal space heating efficiency) | | % | | | 93 | | | 94 |
| | | Seasonal space heating eff. class | | | | | | A | | |
| Domestic hot water heating | General | Declared load profile | | % | L | | XL | L | | XL |
| | | ηwh (water heating efficiency) | | % | 84 | | 87 | 84 | | 87 |
| | | Water heating energy efficiency class | | | | | | A | | |
| Casing | Colour | | | | White - RAL9010 | | | White - RAL9010 | | |
| | Material | | | | Precoated sheet metal | | | Precoated sheet metal | | |
| Dimensions | Unit | Height x Width x Depth | Casing | mm | 590x450x240 | 650x450x240 | -x-x- | 590x450x240 | 650x450x240 | 710x450x240 |
| Weight | Unit | Empty | | kg | 30 | 33 | | 30 | 33 | 36 |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | 1~/50/230 | | | | | |
| Electrical power consumption | Max. | | | W | 80 | | | | | |
| | Standby | | | W | 2 | | | | | |

(1) Setpoint 40°C (2) Setpoint 60°C

Options

| | Type | Material name | Condensing boilers | | | | | | | |
|-----------------------|--|---------------|----------------------|-----------------------|----------------------|-----------------------|------------|----------|-----------|----------|
| | | | EKOMB* | | | | EHOB* | | | |
| | | | Combi 22kW TOP Grade | Combi 22kW HIGH Grade | Combi 28kW TOP Grade | Combi 28kW HIGH Grade | Combi 33kW | H/O 12kW | H/O 18 kW | H/O 42kW |
| Controls | Rf-wlan converter | EKRFLAN1A | . | . | . | . | . | . | . | . |
| | Dongle set | EKDS1A | . | . | . | . | . | . | . | . |
| Installation | Cover plate 35 | EKCP1A | . | . | . | . | . | . | . | . |
| | Solar water heater connection set | EKSH1A | . | . | . | . | . | . | . | . |
| Sensor | Outdoor sensor | EKOSK1A | . | . | . | . | . | . | . | . |
| Valve | Valve kit (IT, ES, CZ, GR, PL, PT) | EKVK4A | . | . | . | . | . | . | . | . |
| | Valve kit (DE) | EKVK5A | . | . | . | . | . | . | . | . |
| | Valve kit (DE) | EKVK6A | . | . | . | . | . | . | . | . |
| | Valve kit 3-way | EK3WV1A | . | . | . | . | . | . | . | . |
| B-pack | B-pack for combi (IT, ES, CZ, GR, PL, PT) | EKFJS1A | . | . | . | . | . | . | . | . |
| | B-pack for combi (IT, ES, CZ, GR, PL, PT) | EKFJM1A | . | . | . | . | . | . | . | . |
| | B-pack for combi (IT, ES, CZ, GR, PL, PT) | EKFJL1A | . | . | . | . | . | . | . | . |
| | B-pack for combi (FR, BE) | EKFJS2A | . | . | . | . | . | . | . | . |
| | B-pack for combi (FR, BE) | EKFJM2A | . | . | . | . | . | . | . | . |
| | B-pack for combi (FR, BE) | EKFJL2A | . | . | . | . | . | . | . | . |
| | B-pack for combi (UK) | EKFJS3A | . | . | . | . | . | . | . | . |
| | B-pack for combi (UK) | EKFJM3A | . | . | . | . | . | . | . | . |
| | B-pack for combi (UK) | EKFJL3A | . | . | . | . | . | . | . | . |
| | B-pack for combi (DE) | EKFJS4A | . | . | . | . | . | . | . | . |
| | B-pack for combi (DE) | EKFJS6A | . | . | . | . | . | . | . | . |
| | B-pack for combi (DE) | EKFJM6A | . | . | . | . | . | . | . | . |
| | B-pack for combi (DE) | EKFJL6A | . | . | . | . | . | . | . | . |
| Propane set | | EKHY075787 | . | . | . | . | . | . | . | . |
| | | EKPS075867 | . | . | . | . | . | . | . | . |
| | | EKPS075877 | . | . | . | . | . | . | . | . |
| | | EKPS075917 | . | . | . | . | . | . | . | . |
| Conversion set | | EKPS076197 | . | . | . | . | . | . | . | . |
| | | EKPS076207 | . | . | . | . | . | . | . | . |
| | | EKPS076217 | . | . | . | . | . | . | . | . |
| | | EKPS076227 | . | . | . | . | . | . | . | . |
| Flue gas | Flue gas non return flap (flue gas cascade) | EKFGF1A | . | . | . | . | . | . | . | . |
| | Horizontal straight flue terminal (low profile) (UK) | EKFGP1A | . | . | . | . | . | . | . | . |
| Others | Concentric connection (Ø 80/125) | EKHY090717 | . | . | . | . | . | . | . | . |
| | Eccentric connection (Ø 80) | EKHY090707 | . | . | . | . | . | . | . | . |
| | Adaptor set concentric 60/100 | EKAS1A | . | . | . | . | . | . | . | . |

Daikin Altherma C Gas ECH₂O

Floor standing gas condensing boiler

Combines modern gas condensing technology with a thermal store



Why choose the Daikin floor standing boiler?

The unit combines modern gas condensing technology with a pressure less thermal store. Customers achieve the highest heating comfort, maximum water hygiene and a small installation footprint.

Multifaceted

Combine with solar and another heat source

Highest hygiene

Complies with superior standards for water sanitation

Connectivity

Features a wireless connection

High DHW Tapping Profile

(3xx = L) and (5xx = XL)

Attractive design

Compact measurements

3xx: 595 x 615 x 1896 mm
5xx: 790 x 790 x 1896 mm



High efficiency

Delivers over 107% more energy efficiency with ISM/Smart Start Function

Easy installation and service


Lambda Gx

Fully electronic and accessible gas-air combination

Energy efficiency

All models reach the energy label A

For example:
D2U50GB028AA /
4xEKSH26P1 / Integrated
controller

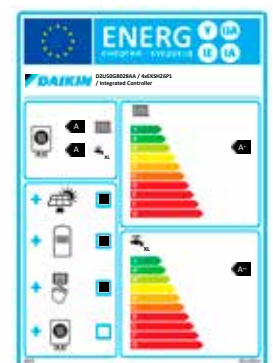

✓ Benefits

- › Thermal store with hygienic fresh water technology
- › Space-saving design: gas boiler and hygienic thermal store are combined in one device
- › Future-proof and flexible: direct combination with a solar system is possible and can be added any time
- › Highest heating comfort is customised for your home
- › Power output 500 kW to 28 kW through Intelligent Storage Management (ISM)



✓ Technological advantage



Health

Integrated thermal storage with hygienic fresh water technology



More space for living

Small footprint while combining a condensing boiler and a thermal store



Fit for the future

Hybrid system. The efficient thermal store can be used with additional heat generators

Gas condensing boiler

Combining modern gas condensing technology with a thermal store in a floor standing application

- › Space-saving gas condensing boiler with integrated heat / solar storage
- › Auto Adaptive Lambda Gx combustion technology for all gas types
- › Universal use thanks to intelligent store management and a power output of 0.5 - 28 kW
- › High heat and DHW comfort with integrated ECH₂O Thermal store: fresh water hygiene technology
- › Easy integration of thermal solar and a further additional heat generator
- › Note: Solar controller (shown on picture) is an option, not standard on boiler



| | | | D | 2U30GC015A | 2U30GC020A | 2U50GC015A | 2U50GC020A | 2U50GC024A | 2U50GC028A | |
|------------------------------|--|---------------------------------------|--|---|---------------|------------|------------|---------------|------------|--|
| Central heating | Heat input Q _n (net calorific value) | Nom Min/Max | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Heat input Q _n (gross calorific value) | Nom Min/Max | kW | 3.3/16.7 | 3.3/22.2 | 3.3/16.7 | 3.3/22.2 | 4.4/26.6 | 4.4/31.1 | |
| | Output P _n at 80/60°C | Min/Nom | kW | 2.9/14.6 | 2.9/19.5 | 2.9/14.6 | 2.9/19.5 | 3.9/23.4 | 3.9/27.2 | |
| | Output P _n cat 50/30°C | Min/Nom | kW | 3.2/15.7 | 3.2/20.9 | 3.2/15.7 | 3.2/20.9 | 4.3/25.0 | 4.3/29.1 | |
| | Water pressure (PMS) | Max | bar | 3 | | | | | | |
| | Water temperature | Max | °C | 90 | | | | | | |
| Domestic hot water | Operation range | Min/Max | °C | 10/90 | | | | | | |
| | Heat input (net calorific value) Q _{nw} | Nom Min/Max | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Heat input (gross calorific value) Q _{nw} | Nom Min/Max | kW | 3.3/16.7 | 3.3/22.2 | 3.3/16.7 | 3.3/22.2 | 4.4/26.6 | 4.4/31.1 | |
| | Output | Min/Nom | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Temperature | Factory setting | °C | 58 | | | | | | |
| | Operation range | Min/Max | °C | 10/85 | | | | | | |
| Piping connections | Cold in-Hot out | | Inch | G 1" (male) | | | | | | |
| | Connection | Diameter | mm | 20 | | | | | | |
| | Consumption (G20) | Min/Max | m ³ /h | 0.32/1.59 | 0.32/2.11 | 0.32/1.59 | 0.32/2.11 | 0.42/2.54 | 0.42/2.96 | |
| Gas | Consumption (G25) | Min/Max | m ³ /h | 0.35/1.75 | 0.35/2.33 | 0.35/1.75 | 0.35/2.33 | 0.47/2.80 | 0.47/3.26 | |
| | Consumption (G31) | Min/Max | m ³ /h | 0.16/0.62 | 0.16/0.82 | 0.16/0.62 | 0.16/0.82 | 0.27/0.98 | 0.27/1.15 | |
| | Connection | | mm | 100 | | | | | | |
| Supply air | Concentric | | mm | 1 | | | | | | |
| | Connection | | mm | 60 | | | | | | |
| Flue gas | Water circuit | Piping connections | Inch | G 1" (female) | | | | | | |
| | Space heating | General | η _s (Seasonal space heating efficiency) | 91 | 92 | 91 | 92 | 92 | 92 | |
| Space heating | General | Seasonal space heating eff. class | | A | | | | | | |
| | | | Declared load profile | | L | | XL | | XL | |
| | | | η _{wh} (water heating efficiency) | 81 | 81 | 89 | 82 | 84 | 82 | |
| Domestic hot water heating | General | Water heating energy efficiency class | | A | | | | | | |
| | | | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | |
| | | | Material | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | Casing | mm | 1,895x595x615 | | | 1,895x790x790 | | |
| | Weight | Unit | Empty | kg | 76 | | | 102 | | |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 1~/50/230 | | | 104 | | | |
| | Max. | | W | 76 | 98 | 76 | 98 | 104 | 108 | |
| Electrical power consumption | Standby | | W | 3 | | | | | | |
| | Drain-back solar | Piping connections solar-flow | Inch | G 1" (female) | | | | | | |
| | | | D | 2U30GB015A | 2U30GB020A | 2U50GB015A | 2U50GB020A | 2U50GB024A | 2U50GB028A | |
| Central heating | Heat input Q _n (net calorific value) | Nom Min/Max | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Heat input Q _n (gross calorific value) | Nom Min/Max | kW | 3.3/16.7 | 3.3/22.2 | 3.3/16.7 | 3.3/22.2 | 4.4/26.6 | 4.4/31.1 | |
| | Output P _n at 80/60°C | Min/Nom | kW | 2.9/14.6 | 2.9/19.5 | 2.9/14.6 | 2.9/19.5 | 3.9/23.4 | 3.9/27.2 | |
| | Output P _n cat 50/30°C | Min/Nom | kW | 3.2/15.7 | 3.2/20.9 | 3.2/15.7 | 3.2/20.9 | 4.3/25.0 | 4.3/29.1 | |
| | Water pressure (PMS) | Max | bar | 3 | | | | | | |
| | Water temperature | Max | °C | 90 | | | | | | |
| Domestic hot water | Operation range | Min/Max | °C | 10/90 | | | | | | |
| | Heat input (net calorific value) Q _{nw} | Nom Min/Max | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Heat input (gross calorific value) Q _{nw} | Nom Min/Max | kW | 3.3/16.7 | 3.3/22.2 | 3.3/16.7 | 3.3/22.2 | 4.4/26.6 | 4.4/31.1 | |
| | Output | Min/Nom | kW | 3.0/15.0 | 3.0/20.0 | 3.0/15.0 | 3.0/20.0 | 4.0/24.0 | 4.0/28.0 | |
| | Temperature | Factory setting | °C | 58 | | | | | | |
| | Operation range | Min/Max | °C | 10/85 | | | | | | |
| Piping connections | Cold in-Hot out | | Inch | G 1" (male) | | | | | | |
| | Connection | Diameter | mm | 20 | | | | | | |
| | Consumption (G20) | Min/Max | m ³ /h | 0.32/1.59 | 0.32/2.11 | 0.32/1.59 | 0.32/2.11 | 0.42/2.54 | 0.42/2.96 | |
| Gas | Consumption (G25) | Min/Max | m ³ /h | 0.35/1.75 | 0.35/2.33 | 0.35/1.75 | 0.35/2.33 | 0.47/2.80 | 0.47/3.26 | |
| | Consumption (G31) | Min/Max | m ³ /h | 0.16/0.62 | 0.16/0.82 | 0.16/0.62 | 0.16/0.82 | 0.27/0.98 | 0.27/1.15 | |
| | Connection | | mm | 100 | | | | | | |
| Supply air | Concentric | | mm | 1 | | | | | | |
| | Connection | | mm | 60 | | | | | | |
| Flue gas | Water circuit | Piping connections | Inch | G 1" | | | | | | |
| | Space heating | General | η _s (Seasonal space heating efficiency) | 91 | 92 | 91 | 92 | 92 | 92 | |
| Space heating | General | Seasonal space heating eff. class | | A | | | | | | |
| | | | Declared load profile | | L | | XL | | XL | |
| | | | η _{wh} (water heating efficiency) | 81 | 81 | 89 | 82 | 84 | 82 | |
| Domestic hot water heating | General | Water heating energy efficiency class | | A | | | | | | |
| | | | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | |
| | | | Material | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | Casing | mm | 1,895x595x615 | | | 1,895x790x790 | | |
| | Weight | Unit | Empty | kg | 78 | | | 104 | | |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 1~/50/230 | | | 106 | | | |
| | Max. | | W | 76 | 98 | 76 | 98 | 104 | 108 | |
| Electrical power consumption | Standby | | W | 3 | | | | | | |
| | Drain-back solar | Piping connections solar-flow | Inch | G 1" | | | | | | |

Gas condensing/solar combination

| | | Regulation accessories | Type | Order No. |
|---|---|--|-----------|----------------------------|
| Room controller |  | Convenience controller with wall-mounting for use as a) A remote control (external equipment controller) b) Mixer unit (additional or standalone) c) Room thermostat for heat exchanger | RoCon U1 | 15 70 34 |
| Mixer module |  | Controller for mixer valve with speed-controlled high-efficiency pump including mixer circuit sensor a) in combination with an equipment controller (RoCon B1). Mixer parameters adjustable via the heat generator. b) in combination with room controller (RoCon U1) 1. can be used as a standalone solution 2. can be integrated in the system via BUS | RoCon M1 | 15 70 68 |
| Outdoor temperature sensor for RoCon convenience regulation |  | In conjunction with the mixer controller RoCon M1 when it is used as a zone or as a stand-alone solution | RoCon OT1 | 15 60 70 |
| Gateway |  | For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP) . | RoCon G1 | 15 70 70 (Daikin brand) |
| Gateway |  | For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP) . | RoCon G1 | 15 70 56 (Rotex brand) |
| Flue-gas kit GCU compact |  | Double-walled connection set of 2x45° elbows with connection extender from DN60 / 100 to DN80 / 125. | Set GCU1 | 15 50 79.17 |
| Double-walled test adapter DN 60/100 |  | Accessories if no standard flue gas connection (Set GCU 1) is used. | D6 PA | 24 60 11 |
| Single-walled test adapter DN 60 |  | Accessories for room-air independant operation if no standard flue gas connection (Set GCU 1) is used. | E6 PA | 24 60 12 |
| Pump Group with mixer |  | For a mixed heating circuit. Ready to plug in, in the thermal insulation case, with pressure controlled high-efficiency circulation pump, motor mixer, stops valves and temperature displays. | | 15 60 75 |
| Pump group without mixer |  | For a mixed heating circuit. Ready to plug in, in the thermal insulation case, with PWMcontrolled high-efficiency circulation pump, motor mixer, stops valves and temperature displays. | | 15 60 77 |
| Fittings kit for mixer group MK1/MK2 | | 1" female thread x 1 1 / 2" flat-sealing. | VMK1 | 15 60 53 |
| Convection brake |  | To prevent circulation under gravity in Sanicube water circuits with Drain-Back, 2 pcs., suitable up to 95 °C, for installation in any tank-side heat exchanger connections except pressure solar heat exchanger | SKB | 16 50 70 |
| Sludge and magnetite separator |  | Compact sludge separator with drain cock and thermal insulation. Input G1-IG (union nut), outlet G1-IG. | SAS1 | 15 60 21 |

Note: To avoid gravity circulation, in water circuits connected to the storage tanks, the installation of circulation brakes (for example, type SKB) is recommended. Please order separately if required.

Daikin Altherma C Oil

Bringing oil heating into the 21st century

Why choose the Daikin oil condensing boiler?



Higher efficiency

Daikin's oil condensing technology is a worthwhile investment

Choosing the right boiler for replacing your oil heating system is a long-lasting decision. Over the years, the cost of fuel will largely exceed the boiler's initial purchase price. Therefore, this is where the Daikin Altherma C Oil can help you making the biggest savings.


The Daikin Altherma C Oil reaches the maximum efficiency labels

All Daikin products are tested and proven to meet criteria set by the EU Ecodesign Directive. We guarantee our individual products and packaged solutions offer maximum convenience, while upholding the highest safety standards.



Advanced oil heating system

The modern Daikin Altherma C Oil will fit seamlessly into your home. Its condensing technology minimizes emissions, is very easy to operate and converts fuel into available heat with virtually no losses. The higher efficiency reduces oil consumption and allows for installing smaller oil storage tanks, which are fitted with odour barriers.



Best-in-class modulation range

A boiler with a wide modulation range

The heat demand of a building varies widely depending on weather conditions and utilisation patterns. The modulating A2 constantly adjusts its output in line with demand. This ensures optimum energy utilisation. It has a particularly large modulation range of 1:2.5. This can even be broadened to 1:64.




Go further with Intelligent Store Management

The Daikin Altherma C Oil can deliver 0-100 percent output to meet demand and provide continuous heat distribution in combination with Daikin's thermal stores. The thermal store volume serves as an active buffer also for space heating. Further optimisation is possible with ISM: even the lowest heat requirements of 500 watts or more can be covered, while producing as much hot water as you need. Frequent on/off switches are avoided by optimising the oil condensing boiler's burner runtimes. Fewer burner starts mean much lower emissions of harmful substances and increased energy efficiency.




With this optimisation, the Daikin Altherma C Oil is well able to meet the steadily increasing need for a constant and immediate supply of hot water – especially with the trend for ever more luxurious bathrooms and multiple shower units in our homes, but decreasing heating requirements as building insulation improves.

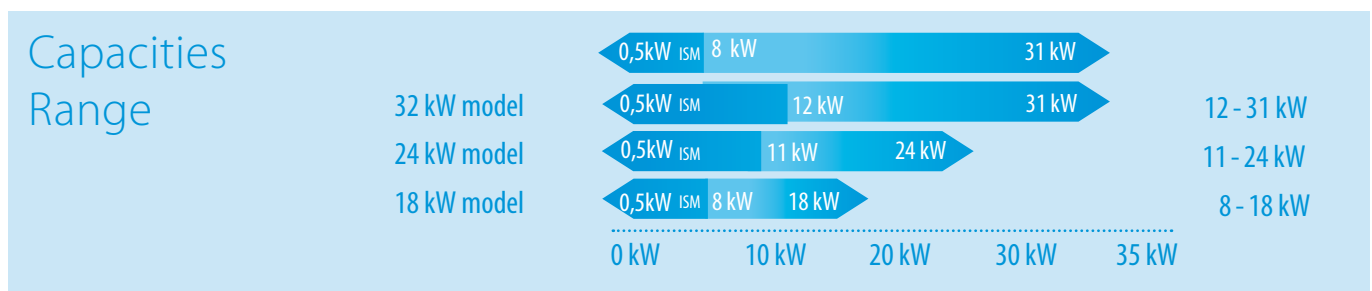

Fit for any replacement

The Daikin Altherma C Oil is ideally suited to replace older boilers, thanks to the great flexibility it offers when integrated into existing systems, plus its low weight and compact dimensions.

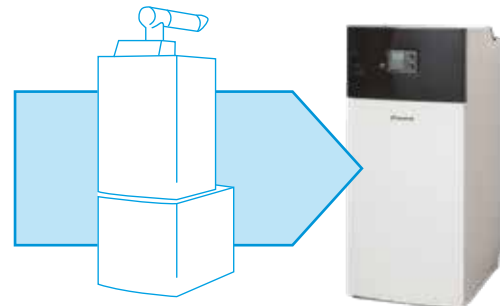

How you can benefit from the Daikin Altherma C Oil



Outstanding efficiency

- › Energy saving condensing technology
- › Optimum heat transfer due to innovative flue gas turbulators in the boiler body



Space saving

- › Small installation area of 0,42 m²
- › Oil tanks designed to site safely beside the boiler



Innovative technology

- › Next generation modulating burner (1:2.5)
- › ISM offers modulation of 1:64 from 0,5 to 32 kW and intelligent storage management
- › Intuitively operated electronic control unit
- › Ready for bio-oil (B10) and all commercially available fuel oils



Meets your needs

- › Ideal for replacing an existing oil boiler
- › Straightforward chimney refurbishment
- › Easy maintenance
- › Odour-proof flexible pipes prevent the smell of fuel oil
- › If used with a Daikin thermal store, possibility of direct combination with our solar thermal system or woodburning stove with back boiler

Oil condensing boiler













| Indoor unit | | | | | 9HA2032A | 9HA2018A | 9HA2024A |
|-----------------|---|--|---------|------|------------|---------------|------------|
| Central heating | Heat input Q _n (net calorific value) | Nom | Min/Max | kW | 12.8 /32.2 | 8.5 /18.2 | 10.9 /24.7 |
| | Heat input Q _n (gross calorific value) | Nom | Min/Max | kW | 13.6 /34.1 | 9.0 /19.3 | 11.6 /26.2 |
| | Output P _n at 80/60°C | Min/Nom | | kW | 12.5 /31.4 | 8.3 /17.7 | 10.6 /24.1 |
| | Water pressure (PMS) | Max | | bar | | 3 | |
| | Water temperature | Max | | °C | | 85 | |
| Supply air | Connection | | | mm | | 125 | |
| | Concentric | | | | | 1 | |
| Space heating | General | η _s (Seasonal space heating efficiency) | | % | 93 | 91 | 92 |
| | | Seasonal space heating eff. class | | | | A | |
| Casing | Colour | | | | | White + Black | |
| | Material | | | | | Aluminium | |
| Dimensions | Unit | H x W x D | Casing | mm | | 1,360x606x754 | |
| Weight | Unit | Empty | | kg | 111 | 97 | 102 |
| | Power supply | Phase/Frequency/Voltage | | Hz/V | | 1~/50/230 | |



Options

| | | Accessories | Order No. |
|---|---|--|---------------|
| Room controller RoCon U1 |  | Convenience controller with wall-mounting for use as: a) A remote control (external equipment controller) b) Mixer unit (additional or standalone) c) Room thermostat for heat exchanger | 15 70 34 |
| Mixer module RoCon M1 |  | Controller for mixer valve with speed-controlled high-efficiency pump including mixer circuit sensor a) in combination with an equipment controller (RoCon B1). Mixer parameters adjustable via the heat generator. b) in combination with room controller (RoCon U1) 1. can be used as a standalone solution 2. can be integrated in the system via BUS | 15 70 68 |
| Outdoor temperature sensor RoCon OT1 for RoCon convenience regulation |  | In conjunction with the mixer controller RoCon M1 when it is used as a zone or as a stand-alone solution. | 15 60 70 |
| Gateway RoCon G1 |  | For coupling the controller to the Internet for remote control the heat source via Mobile Phones (APP) | 15 70 56 |
| Storage tank sensor for RoCon DT1 comfort control |  | Suitable for all A2 oil condensing boilers | 15 60 68 |
| Mixing PCB |  | Can be placed inside the boiler PCB. Same functions as external mixing module but without plastic cover (PCB only). | DRMIXINGPCBA |
| Flue gas Kit |  | To connect flue gas outlet on the bottom side of the boiler | DRFLUEGAKITA |
| Valve Kit |  | Content: 3WV with internal piping/connection valves to install inside housing to connect DHW storage tank | DRVALVEKITA2A |
| Smart start kit |  | Content: 2 mixing valves with internal piping/connection valves, flow sensor, additional temperature sensor. Kit can be installed inside housing. In combination with storage tank, this valve kit provides following functions: heating support, smartstart, electronical bypass, flow control, DHW/CH, thermal energy metering. | DRSMASKAKITA |
| Internal expansion vessel |  | Content: 12 L expansion vessel including piping and holder to install kit inside casing | DREXPVES12A |
| Sludge and magnetite separator SAS1 |  | Compact sludge separator with drain cock and thermal insulation. Input G1-IG (union nut), outlet G1-IG. | 15 60 21 |
| Water purification system Bambini |  | With mounting bracket and backflow preventer. For demineralisation of tap water. Fields of application are heating water, cooling water, battery water and rinsing technology. Operating pressure 2-8.6 bar, temperature range 4-30°C. For approx. 350L system volume. Not suitable for drinking water purification. | 15 30 47 |
| Replacement cartridge EK Bambini | | Usable for water purification system Bambini | 15 30 48 |
| Cleaning brush |  | | DRCLEANBRUSA |

| | | Accessories | Order No. |
|--|---|---|----------------------|
| Condensate box |  | Not needed in all cases. Depends on local regulation and used oil type. Based on that free decision who will use. Option, but will fit inside the unit | DRCONDENBOXA |
| Material refill: Granulate | | | DRCONDENREFA |
| Oil-bleeder TOP 2 |  | With integrated filter (multiple filter) and block valve. Working overpressure max 0,7 bar, filter 20-35 µm, return flow max. 120 L/h. | 15 60 79 |
| Pump group |  | For a mixed and unmixed heating circuit. Pre-assembled, leakage tested and thermally insulated assembly group. Incl. temperature indicator and arrangeable gravity brake. With Grundfoss pump UPM 3 hybrid 25 - 70/80. Pin G1, without PWM-cable. Pump group with mixer (DRMPUMPGRPAA) Pump group without mixer (DRUPUMPGRPAA) | 15 60 75 15 60 77 |
| Screwing set for the pump group | | 1 " IG x 1 1/2 " flat sealing | 15 60 53 |
| Heating circuit distributor 2-fold with integrated hydraulic diverter |  | A distributor which combines the function of a hydraulic diverter and a distributor. Applied in heating and air-conditioning systems, it enables the regulation of different lines. Separate lateral connections, incl. wall bracket and performed sound insulation. Combinable with pump group 15 60 75 or 15 60 77 | 15 60 78 |
| Hydraulic separator HW2500 |  | Low loss header HW2500 with performed insulation and drain valve, for vertical installation, input/output G1 IG (DN 25), with union nut, flow-rate up to 2,500L. Function: - Hydraulic separation - Ventilation - Sludge separation - Detachment of magnetic particles | 15 60 25 |
| Sludge and magnetite separator SAS2 |  | Compact sludge separator with drain cock and thermal insulation. Input G1-IG. | 15 60 23 |
| Hydraulic diverter HWC - DN 125 for up to 3 heat generators |  | Consisting of DN 125 round pipe sub-divided into four zones (using perforated separator discs, length approx. 1550mm), equipped with 8 x heating circuit connections 1" male thread, and a 1 x 1/2" sleeve and standing foot. Max. permissible operating pressure: 6 bar, max. permissible temperature: 110 °C. | 17 29 00 |
| Thermal insulation WHWC for hydraulic diverter |  | Thermal insulation in accordance with EnEV, consisting of 60 mm PUR foam in a galvanised sheet steel casing. | 17 29 01 |
| VA-Oil feeding line |  | PEX-AL compound pipe as oil supply line approved by the building supervision authorities in the DIBT test. Test mark of the building supervision authority: Z-40.23-331. Thick-walled PEX inner pipe with butt-welded aluminium covering and silver-grey PE-external layer. Due to the aluminium covering 100% diffusion tightness. Neutral to heating oil, prevents degradation in the heating oil. Type of delivery: Ring coil packaged in box. | |
| VA Oil pipe | | Ø 12 x 3 | 60 m 17 06 31 |
| Screw connection VA-Oil |  | To connect the oil feed pipe VA-oil to the extraction armature and to the oil filter. Clamping ring screwed fitting made of brass or parts in contact with oil made of stainless steel. Suitable for VA-Oil pipe Ø 12 x 3, connecting thread 3 / 8" male thread. Test mark of the building supervision authority: Z-40.23-331 | |
| Screw connection VA-Oil | | | 10 pc. 17 80 13 |
| Connect VA-Oil | | 10 m PEX-AL compound pipe as an oil-conveying line with two screwed connection fittings 12 x 3 - 3 / 8" male thread | 10 m 17 06 32 |



Flue-gas evacuation system

Hybrid heat pump



Daikin Altherma R/H Hybrid

Oil condensing boiler



Daikin Altherma C Oil

Floor standing gas condensing boiler



Daikin Altherma C Gas ECH₂O

Wall mounted gas condensing boilers




Daikin Altherma C Gas W
Daikin Altherma 3 C Gas W

Daikin Altherma C Oil overview

Your guarantee of proper operation, especially in terms of the noise level of our heat generators, depends on the use of our own brand of flue-gas evacuation systems. All our condensing gas- and oil-fired boilers are optimized and adjusted for this use.

Connection variant for Very High Energy Performance (condensing technology) oil boilers, Daikin Altherma C Oil range.

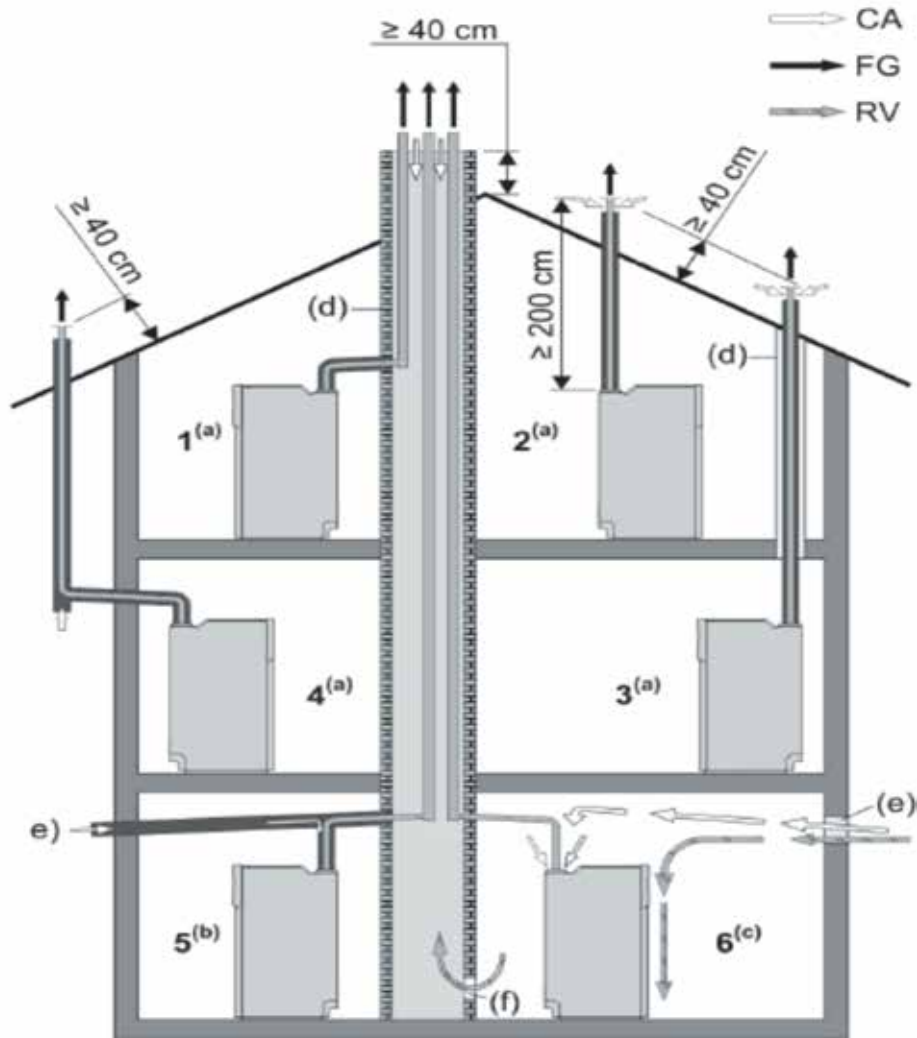

1-6 Daikin Altherma C Oil variants

CA Air (combustion) inlet

FG Flue gas

RV Ventilation

a Variant for suction connection (flue gas/concentric air inlet)

b Variant for partial suction connection (flue gas/separated air inlet)

c Variant for connection dependent on ambient air

d Ventilated vertical flue ducts with fire-resistance duration of 90 minutes (30 minutes for low-rise buildings). Respect the locally applicable standards!

e Ventilation opening (1x150 cm² or 2x75 cm²)

f Ventilation (150 cm²)

- All flue-gas ducts approved for condensing operation can be installed – an adapter may be needed.
- Treatment of condensate: neutralization is essential in all cases for Very High Energy Performance (condensing technology) oil-fired boilers using EL standard oil. Neutralization may not be needed if low-sulfur fuel oil is used. Respect the local regulations!


*) Requirements according to EN 14471: Temperature class T 120, pressure class P1, condensate consistence class W, corrosion-resistance class 2.

Flue-gas evacuation system

Overview of Daikin Altherma C Gas ECH₂O

Your guarantee of proper operation, especially in terms of the noise level of our heat generators, depends on the use of our own brand of flue-gas evacuation systems. All our condensing gas- and oil-fired boilers are optimized and adjusted for this use.

Connection variants for Very High Energy Performance (condensing technology) Daikin Altherma C Gas ECH₂O.

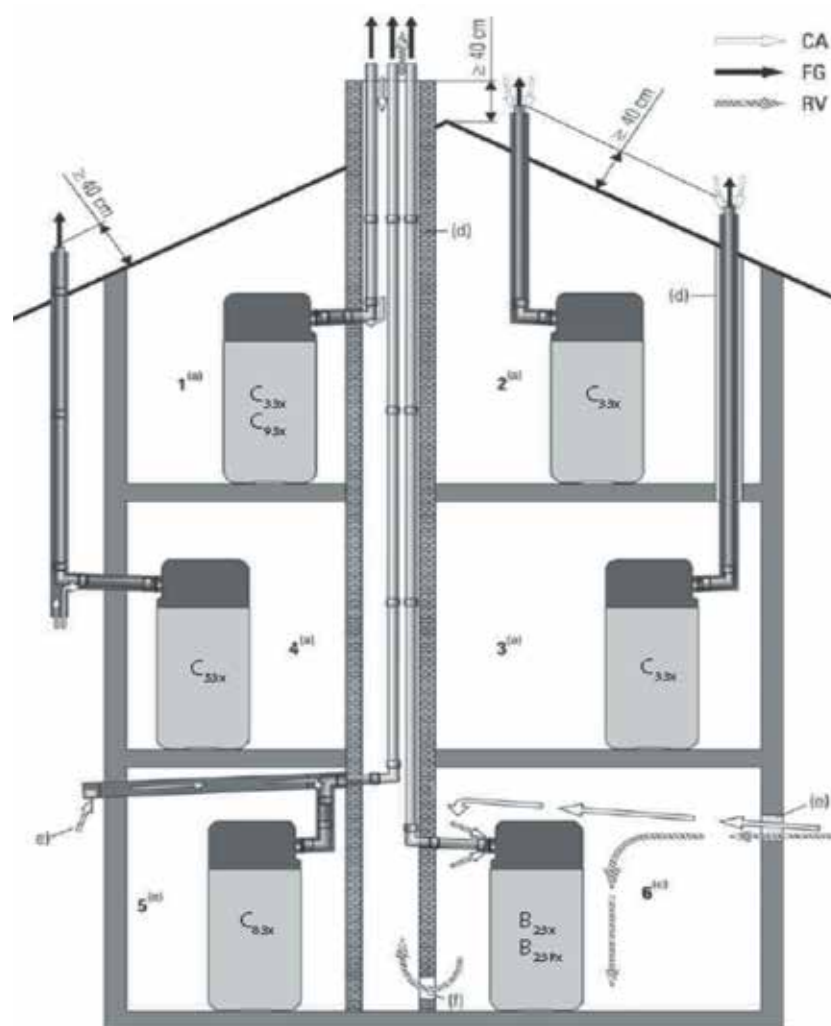

1-6 Variants for Daikin Altherma C Gas ECH₂O

CA Air inlet (combustion)

FG Flue gas

RV Ventilation

a Variant for suction connection (flue gas/concentric air inlet)

b Variant for partial suction connection (flue gas/separated air inlet)

c Variant for connection dependent on ambient air

d Ventilated vertical flue ducts with fire-resistance duration of 90 minutes (30 minutes for low-rise buildings). Respect the locally applicable standards!

e Ventilation opening (1x150 cm² or 2x75 cm²)


f Ventilation (150 cm²)

- All flue-gas ducts approved for condensing operation can be installed – an adapter may be needed.
- Treatment of condensate: neutralization is essential in all cases for Very High Energy Performance (condensing technology) oil-fired boilers using o EL standard oil. Neutralization may not be needed if low-sulfur fuel oil is used.
Respect the local regulations!

*) Requirements according to EN 14471: Temperature class T 120, pressure class P1, condensate consistence class W, corrosion-resistance class 2.

Overview of Daikin Altherma C Gas W and Daikin Altherma R/H Hybrid

Your guarantee of proper operation, especially in terms of the noise level of our heat generators, depends on the use of our own brand of flue-gas evacuation systems. All our condensing gas- and oil-fired boilers are optimized and adjusted for this use.

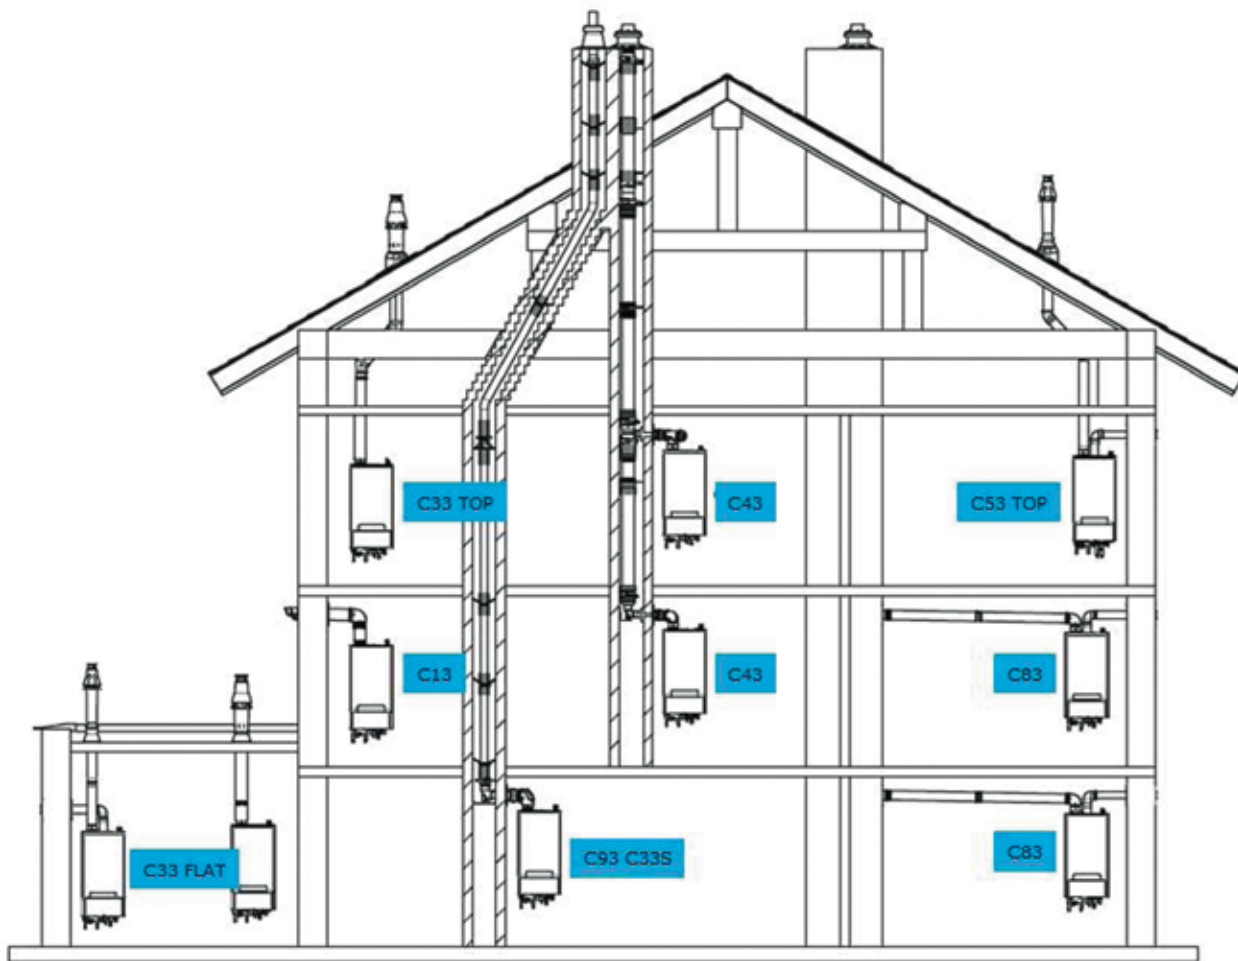

1-8 Variants for Daikin Altherma C Gas W and Daikin Altherma R/H Hybrid

CA Air (combustion) inlet

FG Flue gas

RV Ventilation

B_{xx} Type CEN/TR1749:2009 for operation dependent on ambient air

C_{xx} Type CEN/TR1749:2009 for suction operation

a Variant for suction connection (flue gas/concentric air inlet)

b Variant for partial suction connection (flue gas/separated air inlet)

c Variant for connection dependent on ambient air

d Ventilated vertical flue ducts with fire-resistance duration of 90 minutes (30 minutes for low-rise buildings). Respect the locally applicable standards!

e Ventilation opening (1x150 cm² or 2x75 cm²)

f Ventilation (150 cm²)

• All flue-gas ducts approved for condensing operation can be installed – an adapter may be needed.

*) Requirements according to EN 14471: Temperature class T 120, pressure class P1, condensate consistence class W, corrosion-resistance class 2.



Selection tool


You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.

You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>

Flue-gas evacuation system

Overview of Daikin Altherma C Gas W
and Daikin Altherma R/H Hybrid

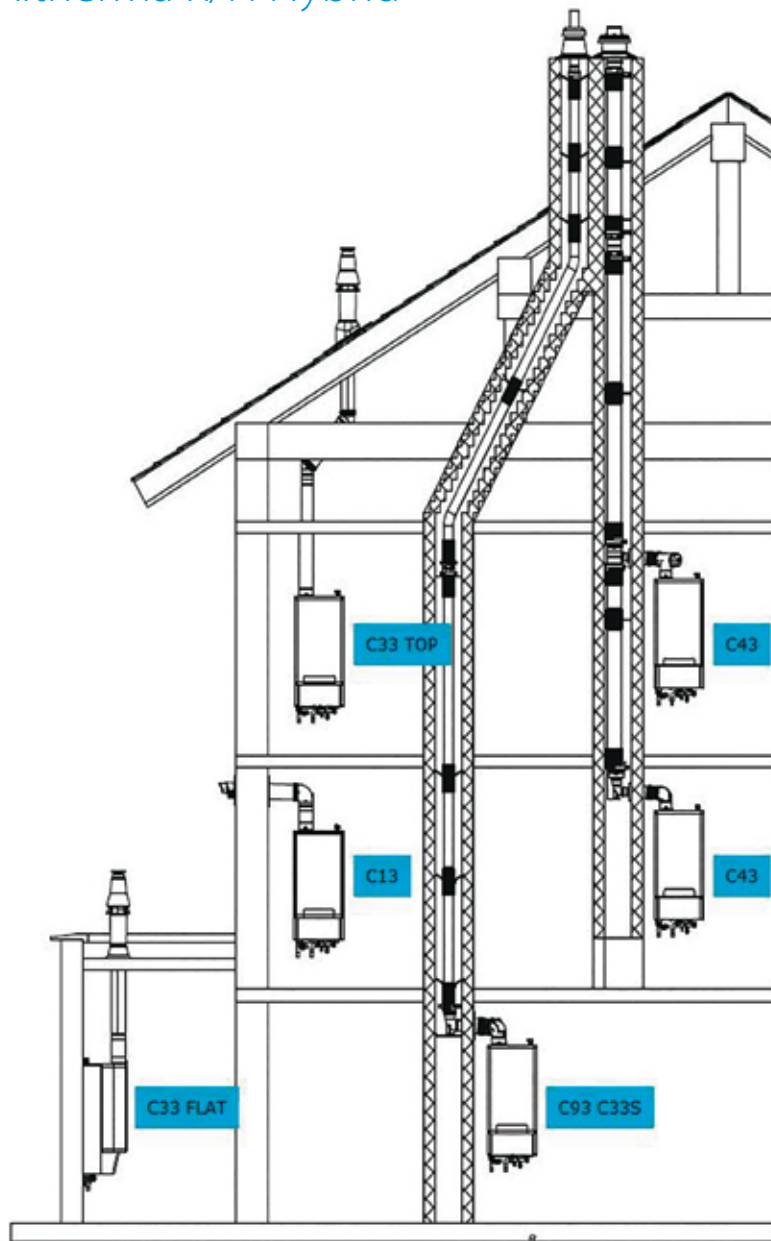


Selection tool

You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.

You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>

Overview of Daikin Altherma 3 C Gas W

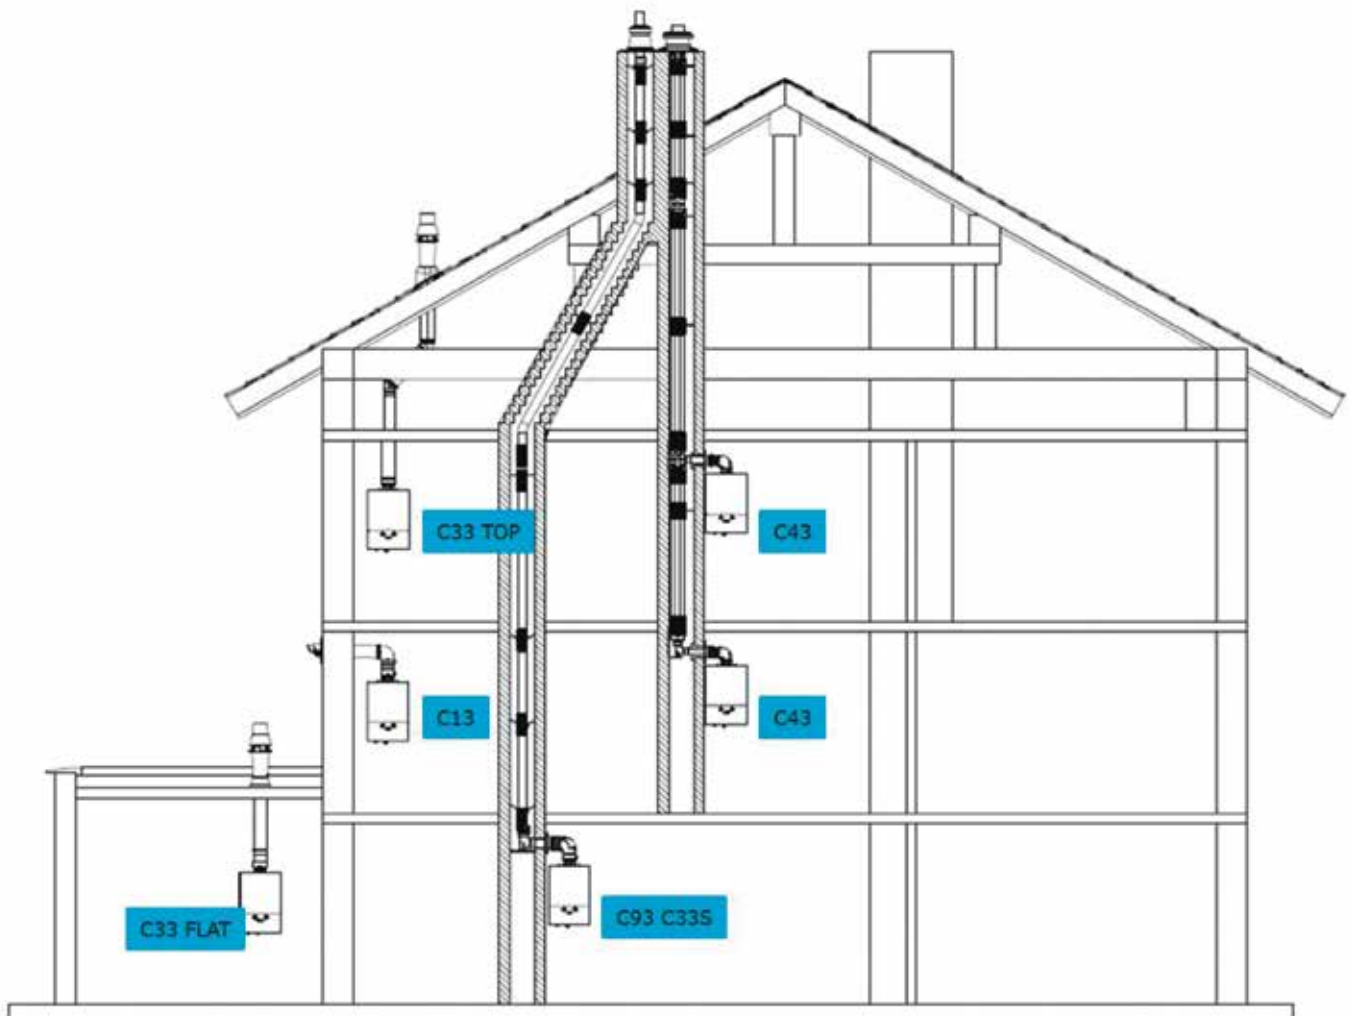

Selection tool

You can determine the optimal solution for your projects using the software for selecting smoke-evacuation accessories.

You can specify suitable flue-gas accessories (obligatory and necessary), depending on the products selected and the installation configurations.

You can also opt to make your selection online using our tool at <http://fluegas.daikin.eu>



Table of content tanks

| | |
|--------------------------------------|-----|
| Thermal stores..... | 152 |
| Stainless steel tanks..... | 154 |
| Oil boiler DHW tank NEW | 155 |

Thermal stores and tanks

Hot water heating installation solutions



Why choose a Daikin Altherma ST thermal store or domestic hot water tank

Whether you only need hot water or you want to combine your hot water with solar systems, we offer you the best solutions to the highest levels of comfort, energy efficiency and reliability.



✓ Domestic hot water tanks

Stainless steel tanks

Comfort

- › EKHTS-AC: available in 200 and 260l in stainless steel
- › EKHWS(U)-B: available in 150, 200 and 300 litres in stainless steel
- › EKHWS-B: available for 400V applications
- › EKHWS(U)-D: available in 150, 180, 200, 250 and 300 litres in stainless steel

Efficiency

- › High-quality insulation keeps heat loss to a minimum
- › Efficient temperature heating: from 10°C to 50°C in only 60 minutes
- › Available as an integrated solution or separate tank

Reliability

- › At necessary intervals, the unit can heat up water up to 60°C to prevent the risk of bacteria growth



The ECH₂O thermal store range

ECH₂O thermal store: additional hot water comfort

Combine your monobloc with a thermal store to achieve the ultimate comfort at home.

- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options


Built for small and large homes, customers can choose between a pressureless and a pressurised hot water system.

Efficiency


- › Fit for the future: maximise renewable energy sources
- › Intelligent Heat Storage Management: ensures continuous heating during defrost mode, and uses stored heat for space heating
- › High-quality insulation keeps heat loss to a minimum

Reliability

- › Maintenance-free tank: no corrosion, anode, scale or lime deposits, and no water loss through the safety valve



Drain-back solar system



Pressurised solar system


Pressureless (drain-back) solar system

- › The solar collectors are only filled with water when sufficient heating is provided by the sun
- › The pumps in the control and pump unit switch on briefly and fill the collectors with storage tank water
- › After filling, water circulation is maintained by the remaining pump

Pressurised solar system

- › System is filled with heat transfer fluid with the correct amount of antifreeze to avoid freezing in winter
- › System is pressurised and sealed


Monthly energy consumption of an average detached house

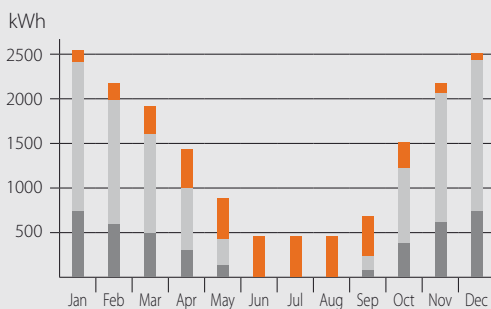

- Utilisation of solar energy for domestic hot water and central heating
- Heat pump (environmental heat)
- Auxiliary energy (electricity)

System diagram: Integrated solar unit

- 1 Use of solar energy for domestic hot water and central heating
- 2 External heat pump unit
- 3 Solar thermal collectors
- 4 Solar pump station

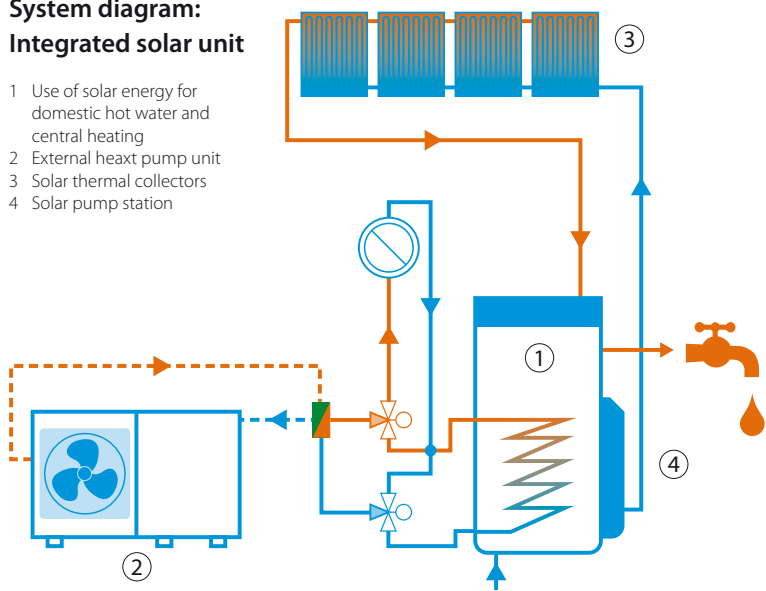

Thermal store

Plastic domestic hot water tank with solar support

- › The thermal store EKHWP* is designed to work with Daikin Altherma heat pumps
- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options
- › Available in 300 and 500 liters



| Accessory | | EKHWP | 300B | 500B | 300PB | 500PB | |
|---------------------------------|---------------------------------|---|------------------------------|----------------|------------------------------|--------|------------------------------|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | |
| | Material | Impact resistant polypropylene | | | | | |
| Dimensions | Unit | Width | mm | 595 | 790 | 595 | 790 |
| | | Depth | mm | 615 | 790 | 615 | 790 |
| | | Height | mm | 1,650 | 1,660 | 1,650 | 1,660 |
| Weight | Unit | Empty | kg | 58 | 82 | 58 | 89 |
| | | Water volume | l | 294 | 477 | 294 | 477 |
| Tank | Material | Polypropylene | | | | | |
| | | Maximum water temperature | °C | 85 | | | |
| | | Insulation Heat loss | kWh/24h | 1.5 | 1.7 | 1.5 | 1.7 |
| | | Energy efficiency class | | B | | | |
| | | Standing heat loss | W | 64 | 72 | 64 | 72 |
| | | Storage volume | l | 294 | 477 | 294 | 477 |
| | | Heat exchanger | Domestic hot water | Quantity | 1 | | |
| Tube material | Stainless steel (DIN 1.4404) | | | | | | |
| Face area | m ² | | 5.600 | 5.800 | 5.600 | 5.900 | |
| Internal coil volume | l | | 27.1 | 28.1 | 27.1 | 28.1 | |
| Operating pressure | bar | | 6 | | | | |
| Average specific thermal output | W/K | | 2,790 | 2,825 | 2,790 | 2,825 | |
| Charging | Quantity | | 1 | | | | |
| | Tube material | | Stainless steel (DIN 1.4404) | | | | |
| | Face area | | m ² | 3 | 4 | 3 | 4 |
| | Internal coil volume | | l | 13 | 18 | 13 | 18 |
| | Operating pressure | | bar | 3 | | | |
| Average specific thermal output | W/K | | 1,300 | 1,800 | 1,300 | 1,800 | |
| Pressurised solar | Average specific thermal output | | W/K | - | | 390.00 | 840.00 |
| Auxiliary solar heating | Tube material | | | - | Stainless steel (DIN 1.4404) | - | Stainless steel (DIN 1.4404) |
| | | | Face area | m ² | - | 1 | - |
| | Internal coil volume | l | - | 4 | - | 4 | |
| | Operating pressure | bar | - | 3 | - | 3 | |
| | Average specific thermal output | W/K | - | 280 | - | 280 | |

Domestic hot water tank

Plastic domestic hot water tank with solar support

- › The thermal store EKHWC* is designed to work with a gas/oil boiler
- › The thermal store EKHWD* is designed to work with boilers as well as with Daikin Altherma High Temperature
- › Fresh water principle: receive domestic hot water on demand while eliminating the risk of contamination and sedimentation
- › Optimal domestic hot water performance: the low temperature evolution enables high tapping performance
- › Fit for the future: possibility to integrate with renewable solar energy and other heat sources, e.g. fireplace
- › Lightweight and robust build of the unit combined with the cascade principle offers flexible installation options
- › Available in 300 or 500 liters



| Accessory | | EKHWDH 500B | EKHWDDB 500B | EKHWC 300B | EKHWC 300PB | EKHWC 500B | EKHWC 500B | EKHWC 500PB | EKHWC 500B | EKHWC 500PB | | | |
|----------------------|---------------------------------|---|------------------------------|---------------|----------------|---------------|---------------|----------------|------------------------------|----------------|-----|----|--|
| Casing | Colour | Traffic white (RAL9016) / Dark grey (RAL7011) | | | | | | | | | | | |
| | Material | Impact resistant polypropylene | | | | | | | | | | | |
| Dimensions | Unit | Width | mm | 790 | | 595 | | 790 | | | | | |
| | | Depth | mm | 790 | | 615 | | 790 | | | | | |
| Weight | Unit | Empty | kg | 73 | 76 | 51 | 53 | 69 | 74 | 79 | 80 | 86 | |
| | | | | Tank | Water volume | l | 477 | | 294 | | 477 | | |
| | Material | Polypropylene | | | | | | | | | | | |
| | Maximum water temperature | °C | 85 | | | | | | | | | | |
| | Insulation | Heat loss | kWh/24h | 1.7 | | 1.5 | | 1.7 | | | | | |
| | Energy efficiency class | B | | | | | | | | | | | |
| | Standing heat loss | W | 72 | | 64 | | 72 | | | | | | |
| | Storage volume | l | 477 | | 294 | | 477 | | | | | | |
| Heat exchanger | Domestic hot water | Quantity | 1 | | | | | | | | | | |
| | | Tube material | Stainless steel (DIN 1.4404) | | | | | | | | | | |
| | | Face area | m ² | 4.900 | | 3.800 | | 4.900 | | | | | |
| | | Internal coil volume | l | 23.8 | | 18.6 | | 23.8 | | 25.8 | | | |
| | | Operating pressure | bar | 6 | | | | | | | | | |
| | | Average specific thermal output | W/K | 2,580 | | 1,890 | | 2,450 | | 2,580 | | | |
| | Charging | Quantity | 1 | | - | | 1 | | | | | | |
| | | Tube material | Stainless steel (DIN 1.4404) | | | | - | | Stainless steel (DIN 1.4404) | | | | |
| | | Face area | m ² | 2 | | - | | 2 | | | | | |
| | | Internal coil volume | l | 11 | | 9 | | - | | 9 | | | |
| | | Operating pressure | bar | 3 | | - | | 3 | | | | | |
| | | Average specific thermal output | W/K | 1,030 | | 920 | | - | | 1,030 | | | |
| | Auxiliary solar heating | Tube material | Stainless steel (DIN 1.4404) | | | | | | | | | | |
| Face area | | m ² | - | | - | | 1 | | | | | | |
| Internal coil volume | | l | - | | - | | 4 | | | | | | |
| Operating pressure | | bar | - | | - | | 3 | | | | | | |
| | Average specific thermal output | W/K | - | | - | | 350 | | | | | | |

Domestic hot water tank

Stainless steel domestic hot water tank

- › EKHTS(U)-AC: available in 200 and 260l in stainless steel
- › EKHWS(U)-B: available in 150, 200 and 300 litres in stainless steel
- › EKHWS-B: available for 400V applications
- › EKHWS(U)-D: available in 150, 180, 200, 250 and 300 litres in stainless steel



| Accessory | | EKHTS(U) | | 200AC | | 260AC | |
|------------|---------------------------|--|---------------------------|-------|-------|-------|-------|
| Casing | Colour | Metallic grey | | | | | |
| | Material | Galvanised steel (precoated sheet metal) | | | | | |
| Dimensions | Unit | Height | Integrated on indoor unit | mm | 2,010 | | 2,285 |
| | | Width | | | 600 | | |
| | Depth | 695 | | | | | |
| | Height | 1,470 | | 1,745 | | | |
| Weight | Unit | Empty | 70 | | 78 | | |
| | | Water volume | 200 | | 260 | | |
| Tank | Material | Stainless steel (EN 1.4521) | | | | | |
| | Maximum water temperature | 75 | | | | | |
| | Insulation Heat loss | kWh/24h | | 12.0 | | 15.0 | |
| | Energy efficiency class | B | | | | | |
| | Standing heat loss | W | | 50 | | 63 | |
| | Storage volume | l | | 200 | | 260 | |
| | Heat exchanger | Quantity | 1 | | | | |
| | Tube material | Duplex steel (EN 1.4162) | | | | | |
| | Face area | m ² | | 1.560 | | | |
| | Internal coil volume | l | | 7.5 | | | |

| Accessory | | EKHWS | | (U)150B3V3 | (U)200B3V3 | (U)300B3V3 | 200B3Z2 | 300B3Z2 | |
|----------------|---------------------------|------------------------------|-----|------------|------------|------------|-----------|---------|-----|
| Casing | Colour | Neutral white | | | | | | | |
| | Material | Epoxy-coated mild steel | | | | | | | |
| Dimensions | Unit | Width | 580 | | | | | | |
| | | Depth | 580 | | | | | | |
| | Height | mm | | 900 | 1,150 | 1,600 | 1,150 | 1,600 | |
| Weight | Unit | Empty | kg | | 37 | 45 | 59 | 45 | 59 |
| | | Water volume | l | | 150 | 200 | 285 | 200 | 285 |
| Tank | Material | Stainless steel (DIN 1.4521) | | | | | | | |
| | Maximum water temperature | 85 | | | | | | | |
| | Insulation Heat loss | kWh/24h | | 1.55 | 1.77 | 2.19 | 1.77 | 2.19 | |
| | Energy efficiency class | C | | | | | | | |
| | Standing heat loss | W | | 65 | 74 | 91 | 74 | 91 | |
| | Storage volume | l | | 150 | 200 | 285 | 200 | 285 | |
| | Heat exchanger | Quantity | 1 | | | | | | |
| | Tube material | Duplex steel LDX 2101 | | | | | | | |
| Booster heater | Capacity | kW | | | | | | | |
| Power supply | Phase/Frequency/Voltage | Hz/V | | 1~/50/230 | | | 2~/50/400 | | |

| Accessory | | EKHWS(U) | | 150D3V3 | 180D3V3 | 200D3V3 | 250D3V3 | 300D3V3 | |
|----------------|---------------------------|--|----------|-----------|---------|---------|---------|---------|-------|
| Casing | Colour | Neutral white | | | | | | | |
| | Material | Epoxy coated steel / Epoxy-coated mild steel | | | | | | | |
| Dimensions | Unit | Height | Tank | mm | 1,000 | 1,164 | 1,264 | 1,535 | 1,745 |
| Weight | Unit | Empty | kg | | 45 | 50 | 53 | 58 | 63 |
| | | Water volume | l | | 145 | 174 | 192 | 242 | 292 |
| Tank | Material | Stainless steel (EN 1.4521) | | | | | | | |
| | Maximum water temperature | 75 | | | | | | | |
| | Insulation Heat loss | kWh/24h | | 1.1 | 1.2 | 1.3 | 1.4 | 1.6 | |
| | Energy efficiency class | B | | | | | | | |
| | Standing heat loss | W | | 45 | 50 | 55 | 60 | 68 | |
| | Storage volume | l | | 145 | 174 | 192 | 242 | 292 | |
| | Heat exchanger | Domestic hot water | Quantity | 1 | | | | | |
| | Tube material | Stainless steel (EN 1.4521) | | | | | | | |
| | Face area | m ² | | 1.050 | 1.400 | 1.800 | | | |
| | Internal coil volume | l | | 4.9 | 6.5 | 8.2 | | | |
| | Operating pressure | bar | | 10 | | | | | |
| Booster heater | Capacity | kW | | | | | | | |
| Power supply | Phase/Frequency/Voltage | Hz/V | | 1~/50/230 | | | | | |

DFLOSTO-A

Domestic hot water tank

Dedicated domestic hot water for Daikin Altherma C Oil

- › The unit's sleek design blends in with other household appliances
- › Capacity 150 litres
- › Easy installation and maintenance



DFLOSTO-A



| Accessory | | DFLOSTO | 150A | |
|----------------|---------------------------|----------------------|---------------------------------------|------|
| Casing | Colour | | White and black (RAL9016 and RAL7011) | |
| | Material | | Steel | |
| Dimensions | Unit | Width | 606 | |
| | | Depth | 754 | |
| | | Height | 1,360 | |
| Weight | Unit | Empty | 80 | |
| | | | | |
| Tank | Water volume | | 148 | |
| | | | | |
| | Material | | Stainless steel (EN 1.4521) | |
| | Maximum water temperature | °C | 85 | |
| | Insulation Heat loss | kWh/24h | 0,84 | |
| | Energy efficiency class | | A | |
| | Standing heat loss | W | 35 | |
| Heat exchanger | Charging | Storage volume | 148 | |
| | | Tube material | Stainless steel (EN 1.4521) | |
| | | Face area | m ² | 0,9 |
| | | Internal coil volume | l | 5,65 |
| | | Operating pressure | bar | 3 |

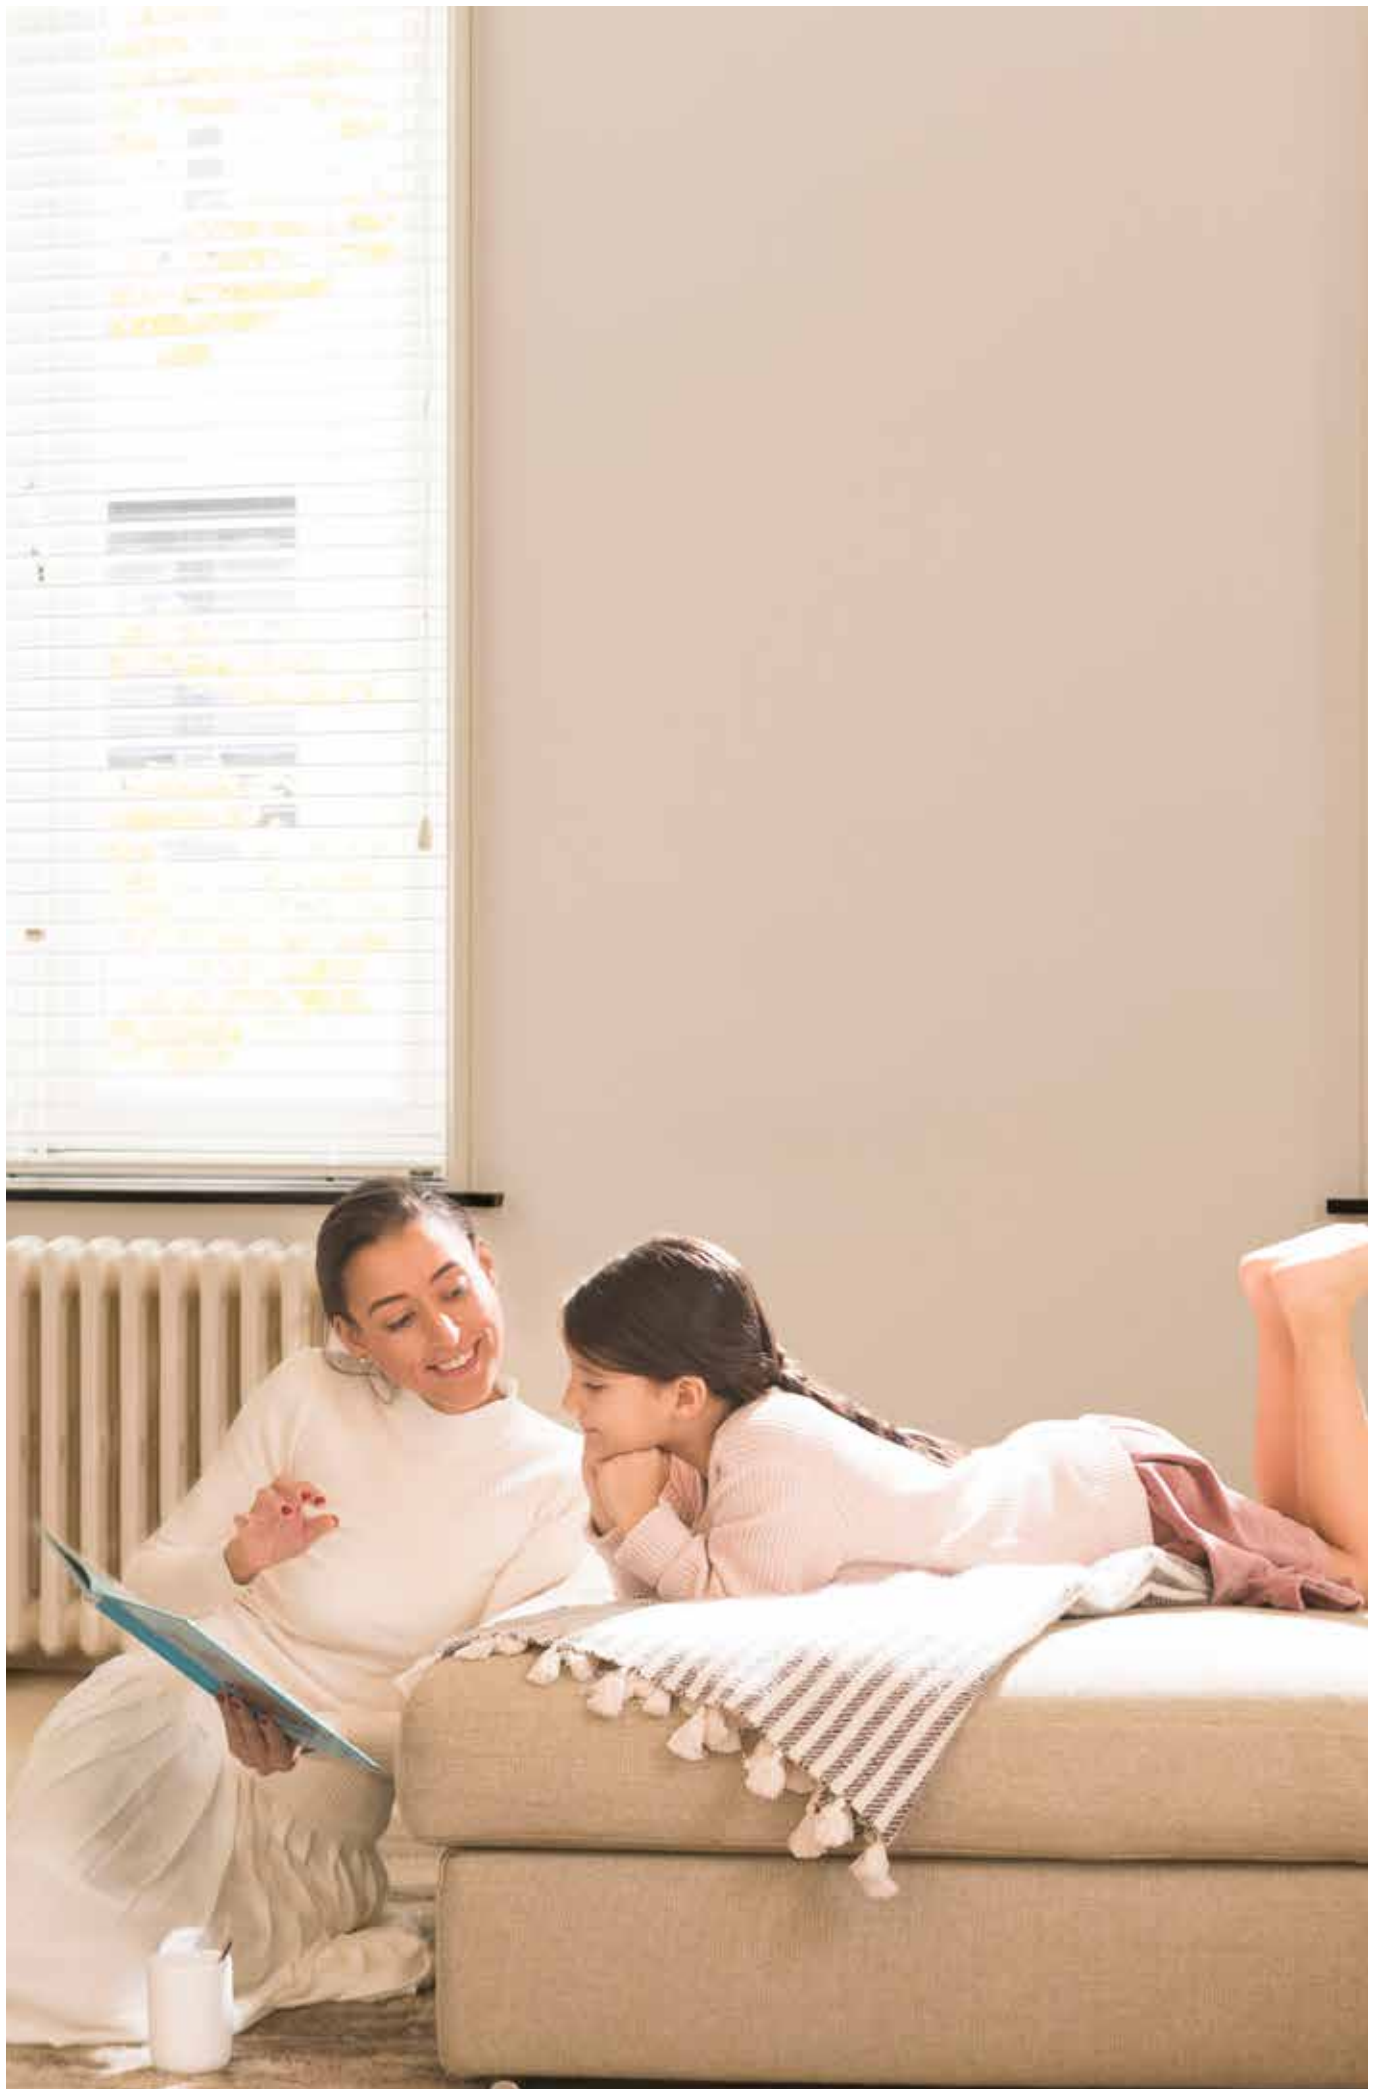


Table of content

controls

| | |
|-----------------------------|-----|
| Room controllers | 158 |
| Online controllers..... | 162 |
| Multi-zone controllers..... | 163 |

Madoka

The beauty of simplicity.



Silver
RAL 9006 (metallic)
BRC1HHDS



Black
RAL 9005 (matt)
BRC1HHDK



White
RAL9003 (glossy)
BRC1HHDW

User-friendly wired remote controller with premium design

Madoka combines refinement and simplicity

- › Sleek and elegant design
- › Intuitive touch-button control
- › Three colours to match any interior
- › Compact, measures only 85 x 85 mm



reddot award 2018
winner



BRC1HHDW / BRC1HHDS / BRC1HHDK

Madoka wired remote controller for Daikin Altherma 3



BRC1HHDW



BRC1HHDS



BRC1HHDK

A new generation of user interface, redesigned and intuitive

› Replacing EKRUDAS for the Daikin Altherma 3 wall mounted and floor standing:



Intuitive control with a premium design:

The smooth curves of the Madoka controller offer a sleek, refined shape which is distinguished by its striking blue circular display. Presenting a clear visual reference with large easy to read numbers, the controller features are accessed through three touch buttons, which combine intuitive control with easy adjustability for an enhanced user experience.

Easy Update via Bluetooth:

It is strongly recommended that the user interface has the latest software version. To update the software or check if updates are available, you need a mobile device and the Madoka Assistant app. This app is available from Google Play and the Apple Store.



Three colours to match any interior design:

No matter your interior design, Madoka will match it. Silver gives an additional touch to stand out in any interior or application, while Black is an ideal match for darker, stylish interiors. White offers a sleek, modern look.

Easily set operation parameters:

Setting and finetuning your controller is simple and helps you attain higher energy savings and more comfort. The system enables you to select the space operation mode (heating, cooling or automatic), set the desired room temperature and control the domestic hot water temperature.

www.daikin.eu/madoka

Wired remote control for Heating

EKRUCBL*

Control

- › Manage space heating, cooling, domestic hot water and among others, booster mode
- › User-friendly remote control with contemporary design
- › Easy to use with direct accessibility to all main functions

Comfort

- › An additional user interface can include a room thermostat in the space to be heated
- › Easy commissioning: intuitive interface for advanced menu settings


* only in combination with EKRTETS

General features

Several languages possible depending on the model, including: English, German, Dutch, Spanish, Italian, French, Greek, Russian, etc.

Applicable Daikin units

- › Daikin Altherma low temperature split
 - Wall mounted
 - Floor standing
 - Monobloc (5-7 kW)
- › Daikin Altherma hybrid heat pump
- › Daikin Altherma ground source heat pump
- › Domestic hot water heat pump

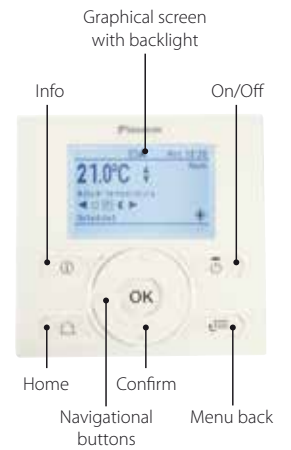

System controller for Daikin Altherma

EKRUAHTB

Control

Reduce installation time

- › Program all settings for an installation on a laptop computer and simply upload them to the controller during commissioning
- › Reuse similar settings for related installations

Improve service diagnostics and maintenance

- › The controller records the time, date and nature of the last 20 error occurrences

Comfort

Maximise comfort with stable room temperatures

- › Raise or lower water temperature as a function of the actual room temperature
- › Manage energy consumption
- › Intuitive screen displays the output and input energy of the unit provide consumption transparency

General features

Weather depending floating set point

When the floating set point function is enabled, the set point for the leaving water temperature will be dependent on the outside ambient air temperature. At low outside ambient air temperatures, the leaving water temperature will increase to satisfy the rising heat requirement of the building. At warmer temperatures, the leaving water temperature will decrease to save energy.

Applicable Daikin units

- › Daikin Altherma low temperature monobloc (11-16 kW)
- › Daikin Altherma high temperature
- › Daikin Altherma Flex Type



Applicable Daikin units



| | | | | BRC1HHDW/S/K | EKRUCB* | EKRUHML* | EKRUAHTB | EHS157034 | DOTROOMTHEAA |
|---|--|-----------|----------------|--------------|---------|----------|----------|-----------|--------------|
| Split Daikin Altherma | Daikin Altherma Low Temperature | D series | 4-6-8kW | • | | | | | |
| | | C series | 11-14-16kW | | • | | | | |
| | Daikin Altherma ECH ₂ O Low Temperature | D series | 4-6-8kW | | | | | • | |
| | | B series | 11-14-16kW | | | | | • | |
| | Daikin Altherma HT | AD series | 11-14-16kW | | | | • | | |
| Monobloc Daikin Altherma | | C series | 5-7-11-14-16kW | | • | | | | |
| Hybrid Daikin Altherma | | C series | 5-8kW | | • | | | | |
| | | A series | 4 kW | | | • | | | |
| Daikin Altherma ground source heat pump | | | 10 kW | | • | | | | |
| Daikin Altherma 3 GEO | | | 6-10 kW | • | | | | | |
| Gas | D2/NDJ-PDS | A series | 12-35kW | | | | | | • |
| | GW | A series | 28-33kW | | | | | | |
| | D2U | GCU | 15-28kW | | | | | • | |
| Oil | D9 | A2 | 18-42kW | | | | | • | |





Always in control

Daikin Online Controller

The Daikin Online Controller application can control and monitor the status of your heating system and allows you to:

Monitor

- › The status of your heating system
- › Your energy consumption graphs*

Schedule

- › Schedule the set temperature* and operation mode with up to **6 actions per day for 7 days**
- › Enable **holiday mode**
- › View in intuitive mode

Control **

- › The **operation mode** and set temperature
- › Remotely control your system and domestic hot water

*Starting with ERGA-D

**Control via the app

- › Room thermostat control for space heating and domestic hot water
- › Leaving water temperature control for domestic hot water
- › External control for domestic hot water



Daikin Online Heating Control

The Daikin Online Control Heating app is a multifaceted programme that allows customers to control and monitor the status of their heating system.

Main features

- › 'Daikin Eye' (intuitive setting)
- › Tank temperature monitoring
- › Equipped with GDPR (data protection)
- › Remote firmware update of LAN Adapter
- › Control over multiple unit locations

Applicable Daikin units

- › Daikin Altherma low temperature split
- › Daikin Altherma low temperature monobloc (5-7 kW)
- › Daikin Altherma ground source heat pump
- › Daikin Altherma hybrid heat pump
- › Wall mounted gas condensing boiler D2CND
- › GCU compact

Applicable Daikin units



| | | | | Connectivity | | |
|---|--|----------|----------------|--------------|-------------|----------------------|
| | | | | BRP069A61/62 | DRGATEWAYAA | EHS157056 (RoCon G1) |
| Split Daikin Altherma | Daikin Altherma Low Temperature | D series | 4-6-8kW | • | | |
| | | D series | 11-14-16kW | • | | |
| | | C series | 11-14-16kW | • | | |
| Monobloc Daikin Altherma | Daikin Altherma ECH ₂ O Low Temperature | D series | 4-6-8kW | | | • |
| | | B series | 11-14-16kW | | | • |
| Hybrid Daikin Altherma | | C series | 5-7-11-14-16kW | • | | |
| Daikin Altherma ground source heat pump | | C series | 5-8kW | • | | |
| Daikin Altherma 3 GEO | | A series | 4 kW | • | | |
| Gas | D2/NDJ-PDS | | 10 kW | • | | |
| Gas | D2U | GCU | 6-10 kW | included | | |
| Gas | D2U | GCU | 12-35kW | | • | |
| Gas | D2U | GCU | 15-28kW | | | • |
| Oil | D9 | A2 | 18-42kW | | | • |

Individual room control system for temperature adjustment of heating and cooling systems



General features

- › Improve energy efficiency of the home
- › Universally deployable and scalable
- › Easy and intuitive installation, operation and maintenance
- › Cost effective and convenient for the end-user

Comfort

With the help of an electronic room-by-room control system, users can regulate the temperature individually in each room.

In addition to the warmth output of the actual heating surfaces, the room temperature control system also takes all other heat sources into account, such as sunshine, warmth from lights or people, and other sources of warmth, such as a fireplace or a tiled stove. On the basis of a continuous comparison of the target and current temperatures, the room temperature control system opens and closes the individual heating circuits by way of electrical valve actuators.

System components



Base station EKWUFHTA1V3

The Daikin Wired Base Station is the central connection unit of a room-by-room temperature control for the surface temperature adjustment of heating and cooling systems.



Wired digital thermostat EKWCTRDI1V3

The setting of the desired room temperature and the operation, can be performed comfortably via a rotary control with rotary-push action and soft ratchet. The well-structured and language-neutral symbols of the display always clearly indicate all settings.



Wired analog thermostat EKWCTAN1V3

An optimum price-performance ratio is offered for rooms where only a very good temperature control is desired, without the comfort function of the display variant.



Valve actuator EKWCVATR1V3

The Daikin Valve Actuator is a thermoelectric valve drive for opening and closing valves on heating circuit distributors of concealed heating and cooling systems.

Applicable Daikin units

- › Combinable to all Daikin Altherma units



Table of content

convectors

| | |
|---------------------------|-----|
| Daikin Altherma HPC | 166 |
|---------------------------|-----|

The Daikin Altherma HPC a fresh approach to home comfort




By providing cooling and heating, Daikin Altherma HPC is combinable with underfloor piping and can replace outdated radiators. The unit fits in bedrooms and living rooms thanks to its silent operation and elegant design.



What is a heat pump convector

The way a heat pump convector works is similar to a radiator, as both use convection to heat a room. A radiator creates convection by running water through its pipes. With a heat pump convector, a radiator's convection process is faster because there is a small fan behind it speeding up the heating cycle.

A heat pump convector creates the same room temperature as a traditional radiator, but with lower water temperatures in the radiator, and in the long run, contribute to direct energy savings for users.

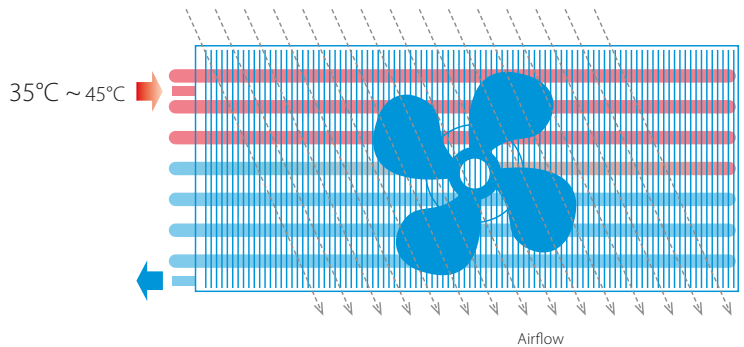


- > Optimized for new build houses
- > Can be selected at low water temperature (35°C) which makes it ideal for heat pump applications.



Slim design

Measuring 135 mm (depth), this heat pump can fit in any house or apartment.

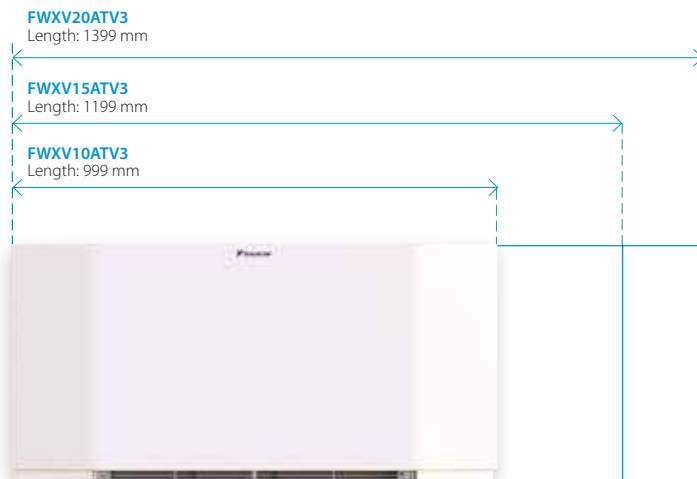

Fast and high capacity


The Daikin Altherma HPC combines the advantages of residential underfloor heating and radiators. It delivers high capacity heating or cooling faster and can be selected at ultra-low temperatures (35/30°C regime).





Silent

As the unit reaches its set point, a continuous modulating fan gradually reduces its speed and creates less noise. The unit's sound pressure measures 25db(A) at 1m when the fan is on a low-speed setting.

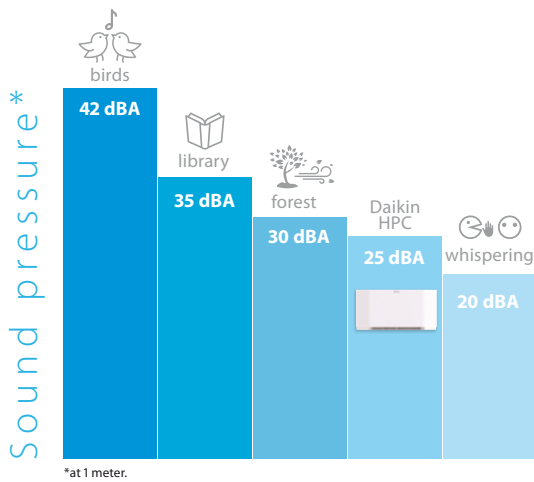

DC Inverter

Daikin Altherma HPC uses the latest technologies to consume less electricity down to 3W of standby power input while maintaining its reliable performance.



Controls

Daikin offers a wide variety of controllers that are functional and have a great design.

EKRTCTRL1



- > Built-in controller
- > Fully modulating
- > Multicolor display

EKRTCTRL2



- > Built-in controller
- > 4 speed selection

EKWHCTRL1



- > Wall controller
- > Fully modulating
- > In combination with EKWHCTRL0

EKPCBO




- > Built-in controller
- > ON/OFF
- > In combination with external thermostats



Modulated airflow

When there is less heating demand, the unit modulates its airflow to slow down the fan rate, and in the process, lowers the operational sound. A standard ON/OFF fan running simultaneously at full speed can increase sound pressure.

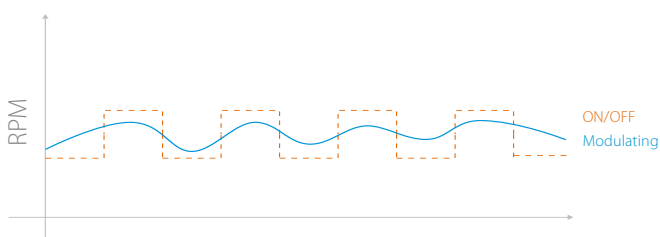

* Only applicable for EKRTCTRL1, EKWHCTRL1



Perfect combination

This heat pump convector fits perfectly within the Daikin Altherma 3 range.



| Indoor unit | | | | FWXV10ATV3 | FWXV15ATV3 | FWXV20ATV3 |
|-------------------------------------|--|------------------------|-------|-------------------|-------------------|-------------------|
| Cooling capacity at 7/12°C | Min. | | kW | 0,66 | 1,30 | 1,82 |
| | Med. | | kW | 1,36 | 2,16 | 2,52 |
| | Max. | | kW | 1,77 | 2,89 | 3,20 |
| Sensible cooling capacity at 7/12°C | Min. | | kW | 0,39 | 0,99 | 1,22 |
| | Med. | | kW | 0,98 | 1,53 | 1,55 |
| | Max. | | kW | 1,33 | 2,10 | 1,78 |
| Heating capacity at 35/30°C | Min. | | kW | 0,41 | 0,45 | 0,93 |
| | Med. | | kW | 0,82 | 1,29 | 1,66 |
| | Max. | | kW | 1,14 | 1,73 | 2,15 |
| Heating capacity at 45/40°C | Min. | | kW | 0,95 | 1,26 | 1,90 |
| | Med. | | kW | 1,63 | 2,33 | 3,05 |
| | Max. | | kW | 2,18 | 3,11 | 3,88 |
| Power input | Min. | | kW | 0,003 | 0,004 | 0,005 |
| | Med. | | kW | 0,018 | 0,020 | 0,027 |
| | Max. | | kW | 0,018 | 0,020 | 0,027 |
| Fan speed | Min. | | m³/h | 118 | 180 | 246 |
| | Med. | | m³/h | 210 | 318 | 410 |
| | Max. | | m³/h | 294 | 438 | 566 |
| Casing | Colour | RAL 9003 | | | | |
| | Material | Metal sheet | | | | |
| Dimensions | Unit | Height | mm | 601 | | |
| | | Width | mm | 999 | 1199 | 1399 |
| | | Depth | mm | 135 | 135 | 135 |
| | Packed unit | Height | mm | 690 | | |
| | | Width | mm | 1230 | 1430 | 1630 |
| | | Depth | mm | 210 | | |
| Weight | Unit | | kg | 20 | 23 | 26 |
| | Packed unit | | kg | 21 | 24 | 27 |
| Packing | Material | Carton | | | | |
| | Weight | | kg | 1 | | |
| Heat exchanger | Quantity | 1 | | | | |
| | Internal coil volume | | l | 0,8 | 1,13 | 1,46 |
| | | Max Operating pressure | | bar | 10 | |
| Water circuit | Piping connections diameter | | inch | 3/4" male | | |
| | Piping material | | | EUROKONUS | | |
| | Heating - Water pressure drop at 35/30°C | Min. | kPa | 0,3 | 2,0 | 1,2 |
| | | Med. | kPa | 1,3 | 7,5 | 4,0 |
| | | Max. | kPa | 2,4 | 12,3 | 8,0 |
| | Heating - Water pressure drop at 45/40°C | Min. | kPa | 1,3 | 8,6 | 3,8 |
| | | Med. | kPa | 4,2 | 3,3 | 11,2 |
| | | Max. | kPa | 7,2 | 11,5 | 21,3 |
| | Cooling - Water pressure drop at 7/12°C | Min. | kPa | 1,2 | 4,3 | 2,1 |
| | | Med. | kPa | 2,8 | 19,3 | 13,1 |
| | | Max. | kPa | 2,9 | 27,0 | 24,0 |
| | Heating - Water flow rate at 35/30°C | Min. | kg/h | 69,9 | 73,6 | 160,2 |
| | | Med. | kg/h | 141,4 | 221,1 | 285,3 |
| | | Max. | kg/h | 195,2 | 297,2 | 369,9 |
| | Heating - Water flow rate at 45/40°C | Min. | kg/h | 163,5 | 212,5 | 327,0 |
| | | Med. | kg/h | 280,3 | 401,1 | 524,6 |
| Max. | | kg/h | 374,1 | 534,5 | 667,5 | |
| Cooling - Water flow rate at 7/12°C | Min. | kg/h | 113,5 | 223,7 | 313,0 | |
| | Med. | kg/h | 234,1 | 371,7 | 433,6 | |
| | Max. | kg/h | 303,6 | 496,6 | 550,6 | |
| | Pressure | Heating/Max. | bar | 10 | 10 | 10 |
| Sound power level | Super silent | | dBA | 29 | 31 | 32 |
| | Min. | | dBA | 34 | 35 | 35 |
| | Max. | | dBA | 51 | 53 | 55 |
| Sound pressure level | Super silent | | dBA | 20 | 22 | 23 |
| | Min. | | dBA | 25 | 26 | 26 |
| | Max. | | dBA | 42 | 44 | 45 |
| Operation range | Heating | Water side | Min. | °C | 30 | |
| | | | Max. | °C. | 85 | |
| | Cooling | Water side | Min. | °C. | 5 | |
| | | | Max. | °C | 20 | |
| | Indoor installation | Ambient | Min. | °CDB | 0 | |
| | | | Max. | °CDB | 45 | |
| Control systems | Infrared remote control | no | | | | |
| | On board control | yes | | | | |
| | Wired remote control | yes | | | | |
| Installation place | Indoor | | | | | |
| Electrical specifications | | | | FWXV10ATV3 | FWXV15ATV3 | FWXV20ATV3 |
| Power supply | Phase | 1 | | | | |
| | Frequency | | Hz | 50 | | |
| IP class | IP | | V | XO | | |
| Electrical power consumption | Max. | | W | 0,019 | 0,02 | 0,029 |
| | Standby | | W | 0,003 | 0,004 | 0,005 |
| Current | Zmax | Text | Ω | 2556 | 2300 | 1643 |
| | Maximum running current | | A | 0,16 | 0,18 | 0,26 |
| Current - 50 Hz | Nominal running current | | A | 0,09 | 0,1 | 0,14 |

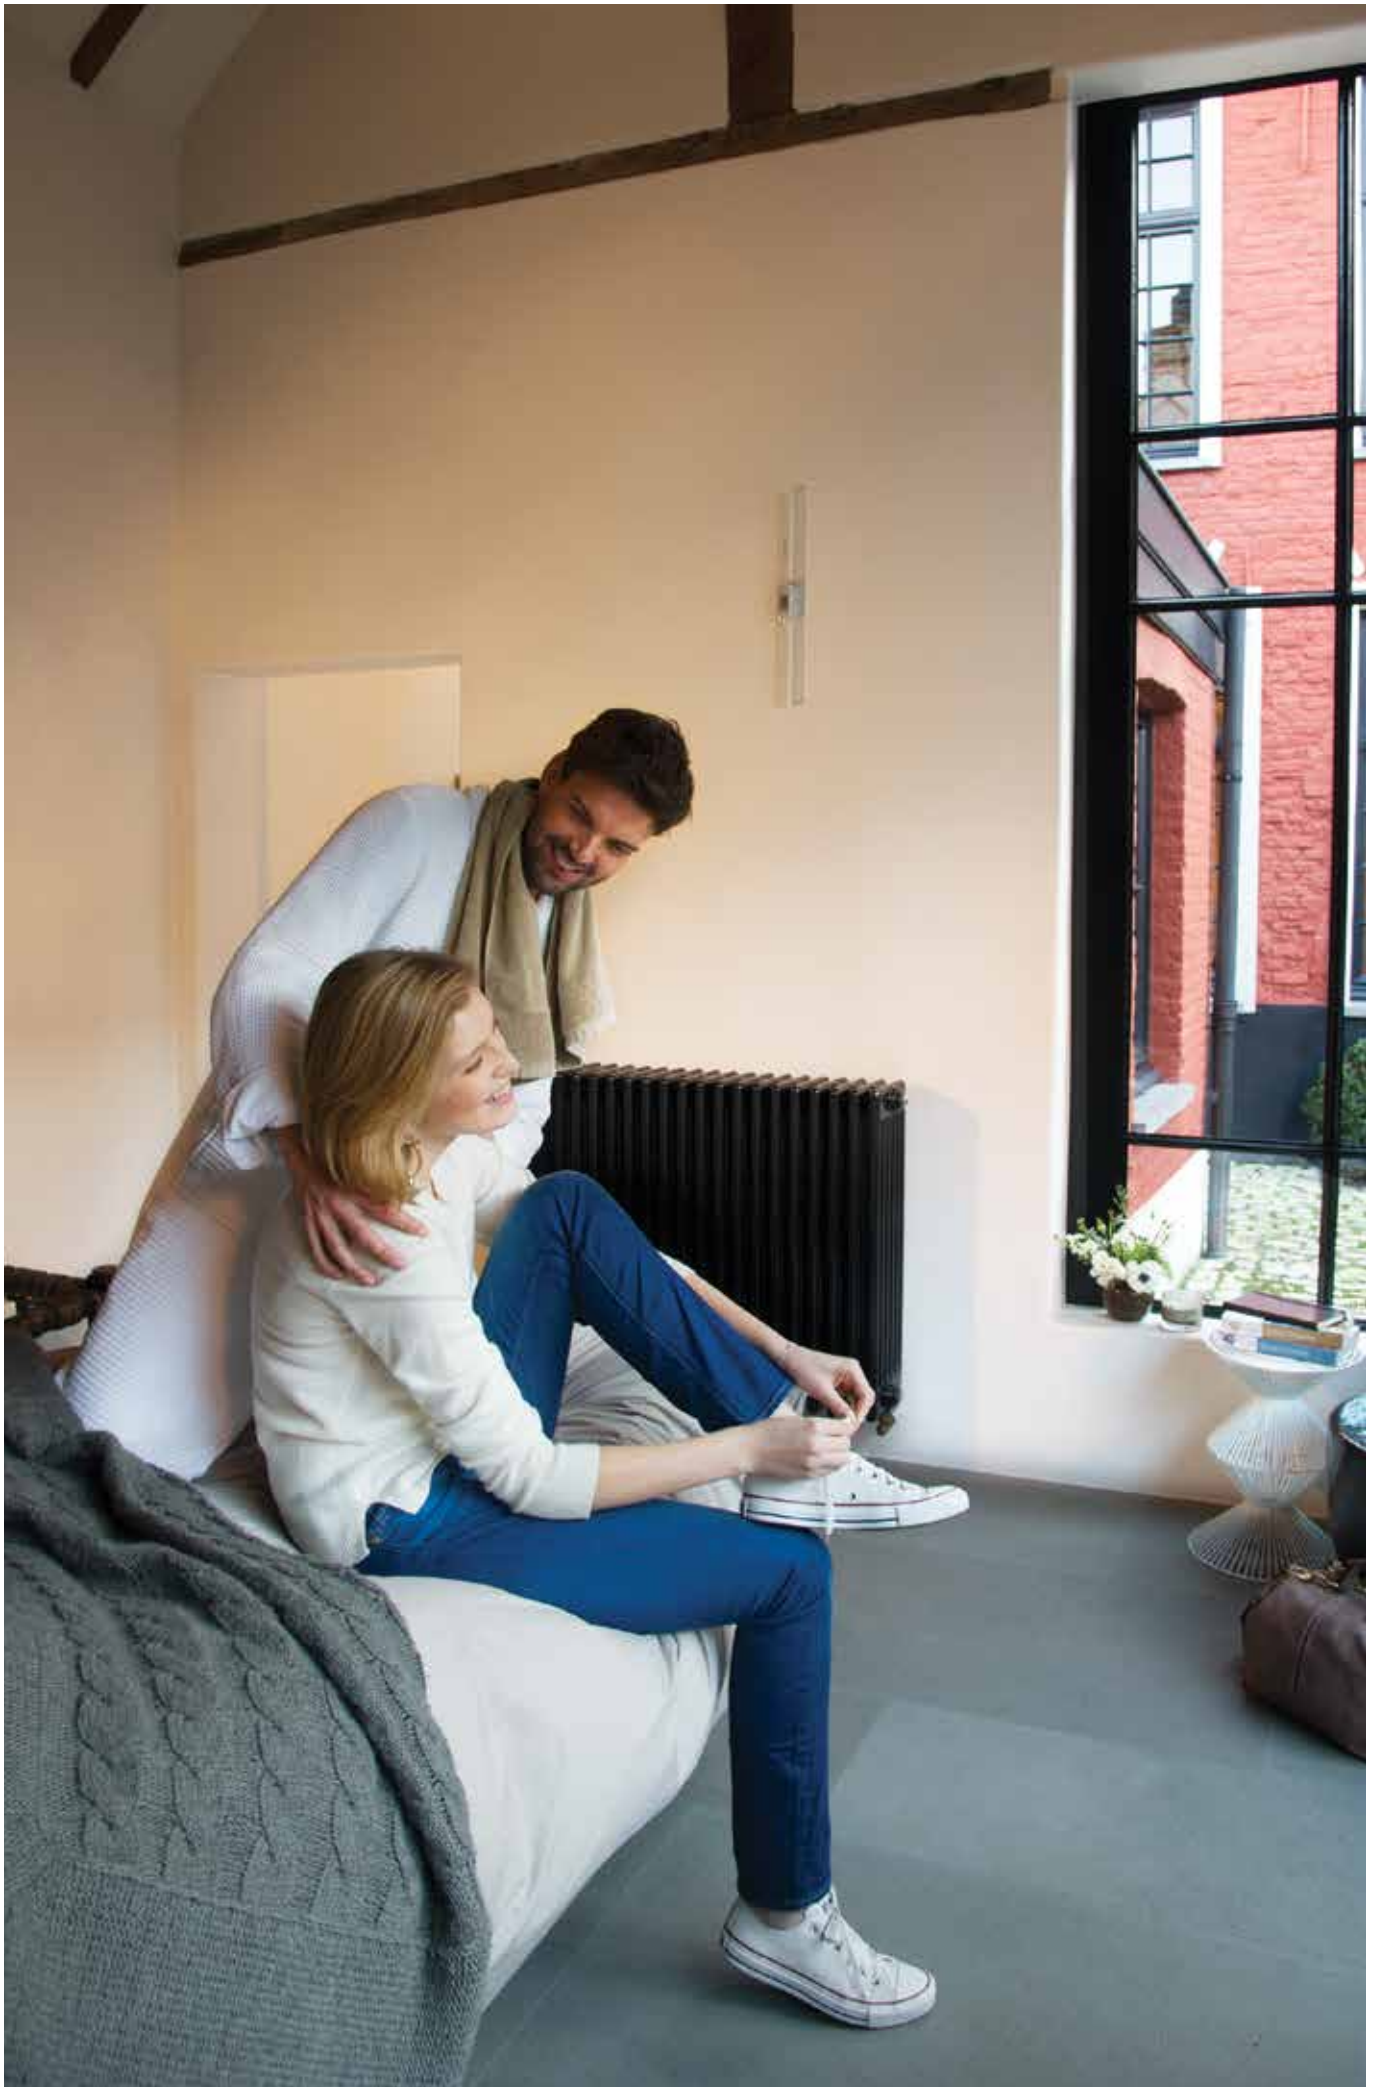




Table of content

Daikin Altherma ST - solar heating systems

| | |
|--|-----|
| Solar panels for pressurised use and Drain-back system | 178 |
| Solar panel - pressurised system | 180 |
| Solar panels - drain-back system | 182 |
| Solar collector | 185 |
| Pump station | 185 |

Daikin Altherma ST

maximising renewable energy



Why choose a Daikin Altherma ST solar panel

Daikin's solar panels are designed to complement a variety of heating systems to garner more renewable energy to deliver hot water to your home.

ECH₂O

✓ Comfort

- › Flexible solar system for pressureless (drain-back) and pressurised solar systems
- › Hot tap water and heating support generated by solar energy
- › Highly efficient flat solar panels that are available in 3 installation options:
 - On roof
 - In-roof
 - Flat roof

✓ Energy efficiency


ECH₂O thermal store range:
Hot water savings with solar energy

Reduce your energy costs by taking advantage of the sun's renewable energy with our solar hot water systems. Built for small and large homes, individuals can choose between a pressureless or pressurised hot water system.

✓ Reliability

Keymark Certificate

- › Daikin's solar collectors have been awarded the Solar Keymark certification. Recognised across Europe, the Keymark for solar thermal products helps users select quality solar collectors. In most European countries this certification is mandatory for the products to be eligible for subsidies.

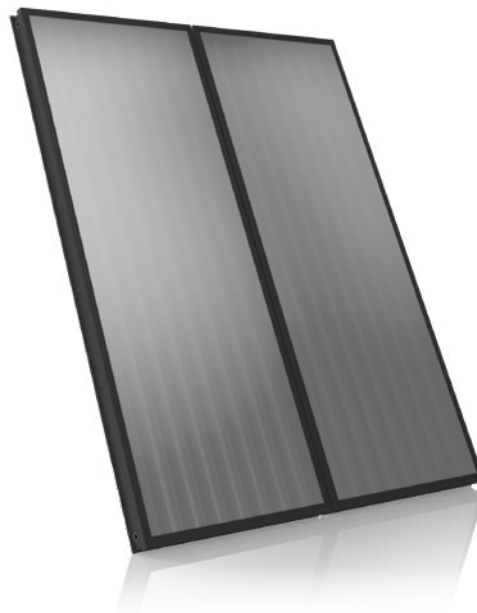

011-751016 F




The Drain-Back solar system

✓ How is it working?

- › Starting the pump station engages the filling of the primary network and ensures the energy transfer from the solar collectors to the thermal store.
- › Whenever the pump station stops working, the water contained in the collectors goes down back to the thermal store.
- › The air intake allowing the draining is ensured by an orifice always placed out of water (at atmospheric pressure).
- › Thanks to this unique way of working, no safety devices, safety valves, expansion vessels, anti-return valve or glycol are necessary.

✓ Advantages

- › 0% glycol : the liquid carrying the heat is only the water inside the system
- › Self-working system with the pump station modulations depending the temperatures inside the collectors and the thermal store.
- › Automatic management of the defrost mode and avoidance of overheating mode.
- › No commissioning on the solar system, no replacement of the heat-carrying liquid.



The pressurised solar system

✓ How is it working?

- › The heat-carrying liquid is mixed with glycol to avoid freezing in the solar collectors system
- › Whenever the solar collectors reach an useful temperature level, the system provides a continuous supply of energy
- › The energy from the collectors is returned to the thermal store thanks to the coil.


✓ Advantages

Monovalent

- › The solar system is used as first heating source and can be coupled with a wall mounted boiler. The cold water is first pre-heated in the thermal store and the boiler can provide additional heat instantaneously if needed.

Bivalent

- › The solar system integrates a backup heater. The domestic hot water is directly produced in the thermal store. The additional heater ensures the back-up in case of low sunshine.



Solar panel - Overview EKS21P - small vertical model

Material list for standard solar panel systems for hot water preparation and heating support EKS21P

Solar panel EKS21P



| Number of solar panels Type of installation Article | Type | Order No. | 2 | | 3 | | 4 | | 5 | |
|--|------------|--------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | | | On-roof Quantity | In-roof Quantity | On-roof Quantity | In-roof Quantity | On-roof Quantity | In-roof Quantity | On-roof Quantity | In-roof Quantity |
| Solar panel | EKS21P | 16 20 12-RTX | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| Solar panel connection | FIX-VBP | 16 20 16-RTX | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 |
| Installation rail for individual solar panel | FIX MP 100 | 16 20 66 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| On-roof installation kit for one solar panel ^{DB+P)} (2 roof hooks per kit) | FIX-ADDP | 16 20 85 | 4 ²⁾ | 0 | 6 ²⁾ | 0 | 8 ²⁾ | 0 | 10 ²⁾ | 0 |
| In-roof installation package, basic storage for two solar panel | IB EKS21P | 16 20 17 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| In-roof installation package, additional storage for central solar panel | IE EKS21P | 16 20 18 | 0 | 0 | 0 | 1 | 0 | 2 | 0 | 3 |

Material list standard solar panels with Drain-back system



| Type of installation | Type | Order No. | On-roof Quantity | In-roof Quantity |
|---|--------------------|---|---------------------|---------------------|
| Control and pump unit | RPS 4 | EKS RPS4A | 1 | 1 |
| Support for connecting pipe solar panel | TS | 16 42 45 | 1 | 1 |
| Connection pipe solar panel | CON 15 | 16 47 32 | 1 | 1 |
| Roof penetration pack solar panel on-roof | EKSRCAP EKSRCRP | EKSRCAP anthracite EKSRCRP red | 1 | 0 |
| Installation accessories, solar panel in-roof | RCIP | 16 20 37-RTX | 0 | 1 |

Nominal volume, complete system

| Number of solar panels | 2 | 3 | 4 | 5 |
|---------------------------|-------|-------|-------|-------|
| Connecting line 15m | DN 16 | DN 16 | DN 20 | DN 20 |
| Nominal system volume (l) | 20.2 | 21.5 | 22.8 | 24.1 |

Material list solar panels with pressurised system ¹⁾



| Number of solar panels Article | Type | Order No. | up to 2 Quantity | up to 3 Quantity | 4 to 5 Quantity |
|--|-----------|-----------|---------------------|---------------------|--------------------|
| Controller | EKSDSR1A | EKSDSR1A | 1 | 1 | 1 |
| Pressure station solar panel | EKS RDS2A | EKS RDS2A | 1 | 1 | 1 |
| Solar panel pressurised solar line DN16 15m | CON 15P16 | 16 20 73 | 1 | 1 | 0 |
| Solar panel pressurised solar connection kit DN16 | CON CP16 | 16 20 75 | 1 | 1 | 0 |
| Solar panel pressurised solar line DN20 15m | CON 15P20 | 16 20 74 | 0 | 0 | 1 |
| Solar panel pressurised solar connection kit DN20 | CON CP20 | 16 20 76 | 0 | 0 | 1 |
| Solar panel expansion vessel 12l * | MAG S12 | 16 20 70 | 1 | 0 | 0 |
| Solar panel expansion vessel 25l * | MAG S 25 | 16 20 50 | 0 | 1 | 0 |
| Solar panel expansion vessel 35l * | MAG S 35 | 16 20 51 | 0 | 0 | 1 |
| Installation material solar panel with pressure system ¹⁾ | RCP | EKS RCP | 1 | 1 | 1 |



Drain-back system



Pressurised system

- DB) Only required for installations with drain-back system.
- P) Only required for pressurised installations.
- * Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.
- 1) The roof penetration for on-roof and flat roof installation is to be provided by the customer. The solar fluid must be ordered separately.
- 2) The number of roof hooks must be checked if necessary (see installation instructions ADM).

Material list for standard solar panel systems for hot water preparation and heating support EKS26P

Solar panel
EKS26P



| Number of solar panels Type of installation / Article | Type | Order No. | 2 | | 3 | | 4 | | 5 | | 5 | | 5 | |
|---|------------|----------------|---------------------|---------------------|-----------------------|---------------------|---------------------|-----------------------|---------------------|---------------------|-----------------------|---------------------|---------------------|-----------------------|
| | | | On-roof Quantity | In-roof Quantity | Flat roof Quantity | On-roof Quantity | In-roof Quantity | Flat roof Quantity | On-roof Quantity | In-roof Quantity | Flat roof Quantity | On-roof Quantity | In-roof Quantity | Flat roof Quantity |
| Solar panel | EKS26P | EKS26P | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 4 | 5 | 5 | 5 |
| Solar panel connection | FIX-VBP | 16 20 16 - RTX | 1 | 1 | 1 | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 4 |
| Mounting rail single collector | FIX MP 130 | 16 20 67 | 2 | 2 | 2 | 3 | 3 | 3 | 4 | 4 | 4 | 5 | 5 | 5 |
| On-roof installation pack for one solar panel ^(DB+P) (2 roof hooks per kit) | FIX-ADDP | 16 20 85 | 4 ²⁾ | 0 | 0 | 6 ²⁾ | 0 | 0 | 8 ²⁾ | 0 | 0 | 10 ²⁾ | 0 | 0 |
| In-roof installation kit, basic flashing for two solar panels | IB V26P | 16 20 19 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 |
| In-roof installation pack, additional flashing for central solar panel | IE V26P | 16 20 20 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 | 0 | 0 | 3 | 0 |
| Flat-roof frame, basic pack for two solar panels | FB V26P | 16 20 58 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 |
| Flat-roof frame, expansion pack additional solar panel | FE V26P | 16 20 59 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 2 | 0 | 0 | 3 |

Material list standard solar panels with Drain-back system



| Number of solar panels Installation type / Article | Type | Order No. | On-roof Quantity | In-roof Quantity | Flat roof Quantity |
|--|------------------|---------------------------------|---------------------|---------------------|-----------------------|
| Control and pump unit | EKS26P4A | EKS26P4A | 1 | 1 | 1 |
| Additional support troughs for connecting pipe solar panel | TS | 16 42 45 | 1 | 1 | 1 |
| Connection pipe solar panel | CON 15 | 16 47 32 | 1 | 1 | 1 |
| Roof penetration pack solar panel on-roof | EKS26P EKS26P | EKS26P Anthracite EKS26P Red | 1 | 0 | 0 |
| Installation accessories, solar panel in-roof | RCIP | 16 20 37-RTX | 0 | 1 | 0 |
| Roof penetration pack solar panel flat roof | RCFP | 16 20 38-RTX | 0 | 0 | 1 |

Material list solar panels with pressurised system ¹⁾



| Number of solar panels Installation type / Article | Type | Order No. | up to 2 Quantity | up to 3 Quantity | 4 to 5 Quantity | Nominal volume, complete system | | | | |
|--|-----------|-----------|---------------------|---------------------|--------------------|----------------------------------|-------|-------|-------|-------|
| | | | | | | Number of solar panels | 2 | 3 | 4 | 5 |
| Controller | EKS26P1A | EKS26P1A | 1 | 1 | 1 | Connecting line 15m | DN 16 | DN 16 | DN 20 | DN 20 |
| Pressure station solar panel | EKS26P2A | EKS26P2A | 1 | 1 | 1 | Nominal volume entire system (l) | 21 | 22.7 | 24.4 | 26.1 |
| Solar panel pressurised solar line DN16 15m | CON 15P16 | 16 20 73 | 1 | 1 | 0 | | | | | |
| Solar panel pressurised solar connection kit DN16 | CON CP16 | 16 20 75 | 1 | 1 | 0 | | | | | |
| Solar panel pressurised solar line DN20 15m | CON 15P20 | 16 20 74 | 0 | 0 | 1 | | | | | |
| Solar panel pressurised solar connection kit DN20 | CON CP20 | 16 20 76 | 0 | 0 | 1 | | | | | |
| Solar panel expansion vessel 12l * | MAG S12 | 16 20 70 | 1 | 0 | 0 | | | | | |
| Solar panel expansion vessel 25l * | MAG S 25 | 16 20 50 | 0 | 1 | 0 | | | | | |
| Solar panel expansion vessel 35l * | MAG S 35 | 16 20 51 | 0 | 0 | 1 | | | | | |
| Installation material solar panel with pressure system ¹⁾ | RCP | EKS26P | 1 | 1 | 1 | | | | | |

Material list for standard solar panel systems for hot water preparation and heating support EKSH26P

Solar panel
H26 P



| Number of solar panels Type of installation Article | Type | Order No. | 1 On-roof Quantity | 1 Flat roof Quantity | 2 On-roof Quantity | 2 Flat roof Quantity | 3 On-roof Quantity | 3 Flat roof Quantity | 4 On-roof Quantity | 4 Flat roof Quantity | 5 On-roof Quantity | 5 Flat roof Quantity |
|---|------------|-------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|----------------------------|--------------------------|----------------------------|
| Solar panel | EKSH26P | EKSH26P | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| Solar panel connection | FIX-VBP | 16 20 16 - RTX | 0 | 0 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 |
| Installation rail guide for individual solar panel | FIX MP 200 | 16 20 68 | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| On-roof installation pack for one solar panel ^{P)} (4 roof hooks per kit) | FIX-ADDP | 16 20 85 | 2 ²⁾ | 0 | 4 ²⁾ | 0 | 6 ²⁾ | 0 | 8 ²⁾ | 0 | 10 ²⁾ | 0 |
| Flat roof support frame basic kit for one solar panel | FB H26P | 16 20 60 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 |
| Flat roof trestle Extension pack for one additional solar panel | FE H26P | 16 20 61 | 0 | 0 | 0 | 1 | 0 | 2 | 0 | 3 | 0 | 4 |



| Nominal volume, complete system | | | | |
|---------------------------------|-------|-------|-------|-------|
| Number of solar panels | 2 | 3 | 4 | 5 |
| Connecting line 15m | DN 16 | DN 16 | DN 20 | DN 20 |
| Nominal volume system (l) | 21.6 | 23.9 | 26 | 28.1 |

Material list solar panels with pressurised system ¹⁾



Pressurised system

| Number of solar panels Installation type / Article | Type | Order No. | up to 3 Quantity | 4 to 5 Quantity |
|--|------------|------------|---------------------|--------------------|
| Pressurised thermal store | EKHWP500PB | EKHWP500PB | 1 | 1 |
| Controller | EKSDSR1A | EKSDSR1A | 1 | 1 |
| Pressure station solar panel | EKSRDS2A | EKSRDS2A | 1 | 1 |
| Solar panel pressurised solar line DN16 15m | CON 15P16 | 16 20 73 | 1 | 0 |
| Solar panel pressurised solar connection kit DN16 | CON CP16 | 16 20 75 | 1 | 0 |
| Solar panel pressurised solar line DN20 15m | CON 15P20 | 16 20 74 | 0 | 1 |
| Solar panel pressurised solar connection kit DN20 | CON CP20 | 16 20 76 | 0 | 1 |
| Solar panel expansion vessel 12l * | MAG S12 | 16 20 70 | 0 | 0 |
| Solar panel expansion vessel 25l * | MAG S 25 | 16 20 50 | 1 | 0 |
| Solar panel expansion vessel 35l * | MAG S 35 | 16 20 51 | 0 | 1 |
| Installation material solar panel with pressure system ¹⁾ | RCP | EKSRCP | 1 | 1 |

- P) Only required for pressurised installations.
- * Standard recommendation, after detailed expansion vessel calculation, other expansion vessels may be necessary.
- 1) The roof penetration for on-roof and flat roof installation is to be provided by the customer. The solar fluid must be ordered separately.
- 2) The number of roof hooks must be checked if necessary (see installation instructions ADM).


Solar panel - Overview EKS26P - standard vertical model

List of materials for solar components that connect several storage tanks















| Total number of storage tanks Article | Type | Order No. | 2 Quantity | 3 Quantity |
|--|---------|-----------|---------------|---------------|
| Solar panel storage tank extension kit | CON SX | 16 01 20 | 1 | 1 |
| Solar panel storage tank extension kit 2 | CON SXE | 16 01 21 | 0 | 1 |

Solar panels for pressurised use and Drain-back system












High-efficiency flat solar panels

Stable watertight solar panel frame made of black anodised aluminium, highly special coating and safety glass, low-reflection, efficient heat insulation of the solar panel back plane with mineral wool. The minimum efficiency of the solar panel is more than 525kWh/m² per year (location: Würzburg, Germany). Suitable for drain-back and pressurised systems.

| | Article | Type | Order No. |
|---|---|------------|--------------|
| High-efficiency flat solar panel EKS21P |  (2,000 x 1,006 x 85mm), solar panel area 1.79m ² , Weight 35kg, water content 1.3l. Max. 6 bar. | EKS21P | EKS21P |
| High-efficiency flat solar panel EKS26P |  (2,000 x 1,300 x 85mm), solar panel area 2.35m ² , Weight 42kg, water content 1.7l. Max. 6 bar. | EKS26P | EKS26P |
| High-efficiency flat solar panel EKSH26P |  (1,300 x 2,000 x 85mm), solar panel area 2.35m ² , Weight 42kg, water content 2.1l. Max. 6 bar. | EKSH26P | EKSH26P |
| Solar panel connection |  Installation profile connector, expansion joints and double clamping blocks. | FIX-VBP | 16 20 16-RTX |
| Installation profile rail for EKS21P |  Consisting of installation profile rails and solar panel securing clips. | FIX MP 100 | 16 20 66 |
| Installation profile rail for EKS26P |  Consisting of installation profile rails and solar panel securing clips. | FIX MP 130 | 16 20 67 |
| Installation profile rail for EKSH26P |  Consisting of installation profile rails and solar panel securing clips. | FIX MP 200 | 16 20 68 |
| Support for connecting pipe solar panel |  Support troughs (5 in number, length, in each case, 1.3m) for support of the solar panel plastic connection lines in Drain-Back. | TS | 16 42 45 |
| On-roof installation pack slate |  4 roof hooks for flat roofing, e.g. slate, for one solar panel. | FIX ADS | 16 47 23 |
| On-roof installation pack MULTI |  2 height-adjustable roof hooks for drain-back and pressure system, including mounting materials. | FIX-ADDP | 16 20 85 |
| Roof holder for corrugated covering |  4 holders including fixing material for one solar panel. | FIX-WD | 16 47 03-RTX |
| Roof holder for welded sheet metal covering |  4 holders including fixing material for one solar panel. Note: for on-roof installation only. | FIX-BD | 16 47 04-RTX |

Solar panels for pressurised use and Drain-back system



| | | Article | Type | Order No. |
|--|---|---|---------|--------------|
| Basic in-roof assembly package EKS21P |  | Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°. | IB V21P | 16 20 17 |
| Extension kit in-roof mounting EKS21P |  | Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°. | IE V21P | 16 20 18 |
| Basic in-roof mounting pack EKS26P |  | Basic flashing for two solar panels, duct set including installation material. Minimum roof gradient 15°. | IB V26P | 16 20 19 |
| Expansion in-roof mounting pack EKS26P |  | Additional package for an additional solar panel, duct set including installation material. Minimum roof gradient 15°. | IE V26P | 16 20 20 |
| In-roof covering slate supplementary pack |  | 30 layer pieces for flat coverings, e.g. slate (per basic in-roof pack you will need one supplementary pack). | FIX-IES | 16 46 16-RTX |
| Basic pack flat-roof frame for mounting of two EKS26P solar panels on flat roofs |  | Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3). | FB V26P | 16 20 58 |
| Extension pack flat-roof frame for one additional EKS26P solar panel |  | Extension for FB V26P. | FE V26P | 16 20 59 |
| Basic pack flat-roof frame for mounting of one EKSH26P collector on flat roofs |  | Pre-assembled system for simple and rapid installation, adjustable gradient (30° to 60°). Suitable for wind load zone WLZ 2 (only to a limited extent for WLZ 3). | FB H26P | 16 20 60 |
| Extension pack flat-roof frame for one additional EKSH26P solar panel |  | Extension for FB H26P. | FE H26P | 16 20 61 |
| Disassembly tools ducts drain-back system | | | FIX LP | 16 20 29-RTX |














Drain-back system



Pressurised system








Solar panel - pressurised system



| | Article | Type | Order No. |
|--|---|-----------|-----------|
| Controller |  <p>Temperature-difference regulator for the solar panel with pressure system. Regulator with graphic display for representation of hydraulic schematics and yield balances, for example. Including return flow and storage tank temperature sensor and housing for wall mounting.</p> | EKSDSR1A | EKSDSR1A |
| Pressure station |  <p>Consists of: Pipe connection \varnothing 22mm including pipe compression fittings and support sleeves (5x), flow measurement unit with 2 x KFE cock, integrated air separator, ball-cocks with integrated back-flow prevention, Grundfos Solar 25-65 pump, safety group with pressure gauge, including insulation and installation accessories.</p> | EKRDS2A | EKRDS2A |
| Fill and drain connection |  <p>For RPS3 and tanks from 2013 onwards, for easy filling and emptying through the fill and drain valve.</p> | KFE BA | 16 52 15 |
| Solar panel pressurised solar line DN 16 |  <p>15m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 16. For systems of up to 3 solar panels and a line length of up to 25m. Without connection fittings.</p> | CON 15P16 | 16 20 73 |
| Solar panel pressurised solar connection kit DN 16 |  <p>All necessary fittings for connecting the pressurised solar line DN 16. Required together with CON 15P16.</p> | CON CP16 | 16 20 75 |
| Solar panel pressurised solar connection kit DN 16 |  <p>Fittings for connecting two pressurised solar lines DN 16.</p> | CON XP16 | 16 20 71 |
| Solar panel pressurised solar line DN 20 |  <p>15m thermally-insulated stainless steel corrugated pipe line for solar panel pressurised systems with inserted sensor line nominal size DN 20. For systems up to 5 solar panels and a line length of up to 25m. Without connection fittings.</p> | CON 15P20 | 16 20 74 |
| Pressurised solar connection kit DN 20 |  <p>All necessary fittings for connecting the pressurised solar line DN 20. Always required together with CON 15P20.</p> | CON CP20 | 16 20 76 |
| Solar panel pressurised solar connection kit DN 20 |  <p>Fittings for connecting the pressurised solar line DN 20.</p> | CON P20 | 16 20 72 |
| Installation material solar panel pressurised system |  <p>Connection fittings for pressurised systems and solar panel installation material, consisting of installation material for solar panel and connection pipe, 2m UV-proof thermal insulation for the outer area, connection fittings and panel temperature sensor. The roof penetration must be provided to the customer.</p> | RCP | EKSRCP |
| Solar panel row connection for the solar panel with pressure system |  <p>Connection kit for connecting two rows of solar panels in parallel. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1 m thermally-insulated piping.</p> | CON LCP | 16 20 45 |








Solar panel - pressurised system



| | | Article | Type | Order No. |
|--|--|---|----------------|--------------|
| Expansion vessel 12l with connection block |  | For solar panels with pressure systems of max. 2 x EKS21P - solar panels. | MAG S12 | 16 20 70 |
| Expansion vessel 25l with connection block |  | For solar panels with pressure systems of max. 3 solar panels. | MAG S 25 | 16 20 50 |
| Expansion vessel 35l with connection block |  | For solar panels with pressure systems of max. 5 solar panels. | MAG S 35 | 16 20 51-RTX |
| GLYCOL CORACON SOL 5F |  | 20l can of pre-mixed solar fluid, functional range up to -28°C. | CORACON SOL 5F | 16 20 52-RTX |
| GLYCOL CORACON SOL 5 |  | 1l of solar fluid concentrate for extension of the frost range. With 20l of solar fluid with 1 l additive, the use range extends down to -33°C. For 20l of solar fluid with 2x 1l of additive, the functional range is extended to -38°C. | CORACON SOL 5 | 16 20 53 |
| Circulation lance |  | For energetically-optimised incorporation of the domestic hot water circulation in the hot water connection of the warm-water storage tank. | ZKL | 16 51 13 |
| Thermostatic mixer as scalding protector | | Thermal safety device for the domestic water pipe. Setting range 35-60°C. | VTA32 | 15 60 15 |
| Screw connection kit 1" | | For connection of the scald protection VTA32. | | 15 60 16 |
| Thermostatic regulator 230V | | With capillary tube temperature sensor, setting range 35-85°C. | SCS-TR | 16 41 30 |
| 3-way switching valve 1" male |  | With motor drive 230V, switchover time 6 sec. | 3 W-UV | 15 60 34 |

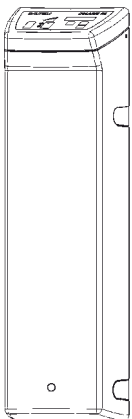








Solar panels - drain-back system



| | Article | Type | Order No. |
|---|--|-------------|--------------|
| EKS RPS4 regulation and pump unit |  <p>Ready to plug in unit (230V), with digital differential temperature regulation, return and storage tank temperature sensors, high-efficiency circulation pump.</p> <p>INFO: The flow sensor (FLS 20), included in the supply, provides more effective operation of the EKS RPS4. In addition to direct calculation of the heat output, the sensor allows modulation of the operating pump and thus an additional saving in electrical energy.</p> | EKS RPS4 | EKS RPS4A |
| Fill and tap connection solar panel with drain-back system | <p>For easy filling of solar panels with drain-back system from 2013 onwards through the solar flow connector.</p> | KFE DB BA | 16 52 16 |
| Burner blocking contact connection cable |  <p>For RPS2, RPS3, RPS3 M, RPS3 25M.</p> | BSKK | 16 41 10-RTX |
| Solar panel FlowGuard solar flow regulator |  <p>With solar flow indicator 2-16l/min.</p> | FLG | 16 41 02-RTX |
| Connection tube solar panel |  <p>Ready to connect connection line 15m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.</p> | CON 15 | 16 47 32 |
| Connection tube solar panel |  <p>Ready to connect connection line 20m between solar panel and pump station, consisting of thermally-insulated flow and return line with integrated sensor cable.</p> | CON 20 | 16 47 33 |
| Solar panel solar flow sensor 100 |  <p>Sensor for expanding RPS3 25M control system, enables heat yield metering in large installations. Measuring range up to 100l/min.</p> | FLS 100 | 16 41 03-RTX |
| Extension |  <p>For connecting a collector array (EKSV21P, EKSV26P, EKSH26P) to the on-site rigid copper connection pipes when using roof penetration box kits EKSRCAP, EKSRCRP, RCIP, RCFP.</p> | CON X20 25M | 16 42 32 |




Solar panels - drain-back system



| | Article | Type | Order No. | | | | | | | | | | |
|--|--|------------------------|--------------|---|-----|---|-----|---|-----|---|-----|-----------------------------------|----------------------------------|
| Extension connection tube solar panel |  <p>Ready to plug in including installation material and connection fittings L = 2.5m L = 5.0m L = 10.0m</p> <p>Maximum possible length of the connection pipe:</p> <table border="1"> <thead> <tr> <th>Number of solar panels</th> <th>Max. length</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>45m</td> </tr> <tr> <td>3</td> <td>30m</td> </tr> <tr> <td>4</td> <td>17m</td> </tr> <tr> <td>5</td> <td>15m</td> </tr> </tbody> </table> | Number of solar panels | Max. length | 2 | 45m | 3 | 30m | 4 | 17m | 5 | 15m | CON X 25 CON X 50 CON X 100 | 16 42 61 16 42 62 16 42 63 |
| | | Number of solar panels | Max. length | | | | | | | | | | |
| 2 | 45m | | | | | | | | | | | | |
| 3 | 30m | | | | | | | | | | | | |
| 4 | 17m | | | | | | | | | | | | |
| 5 | 15m | | | | | | | | | | | | |
| Extension of the inflow pipe |  <p>UV-resistant thermally-insulated, length = 8m, including cable connecting fitting for the solar panel sensor line.</p> | CON XV 80 | 16 42 64 | | | | | | | | | | |
| On-roof roof penetration, anthracite |  <p>Roof penetration pack with connection fittings and solar panel installation material, consisting of anthracite roof penetration, installation material for solar panel and connection pipe, 2m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p> | EKSRCAP | EKSRCAP | | | | | | | | | | |
| On-roof roof penetration, tile red |  <p>Roof penetration pack with connection fittings and solar panel installation material, consisting of tile red roof penetration, installation material for solar panel and connection pipe, 2m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p> | EKSRCRP | EKSRCRP | | | | | | | | | | |
| Solar panel panel row connection |  <p>Connection kit for connecting two rows of solar panels one above the other. Consisting of solar panel installation material, equipotential bonding terminals, end caps, connection elbows and 1m thermally-insulated piping.</p> | CON RVP | 16 20 35-RTX | | | | | | | | | | |
| Installation material, solar panel in-roof |  <p>Ready to plug in including installation material and connection fittings.</p> | RCIP | 16 20 37-RTX | | | | | | | | | | |
| Roof penetration, flat roof |  <p>Roof penetration pack with connection fittings and solar panel installation material, consisting of flat-roof roof penetration, installation material for solar panel and connection pipe, 8.5m UV-proof heat insulation for the outer area, connection fittings with detaching tools and panel temperature sensor.</p> | RCFP | 16 20 38-RTX | | | | | | | | | | |
| Roof penetration flat-roof for alternate side solar panel connection |  <p>Flat roof penetration with screw connections and blind plugs for penetration openings which are not used.</p> | CON FE | 16 47 09 | | | | | | | | | | |
| Solar panel boiler extension kit |  <p>Connection kit for the connection of two warm-water storage tanks, consisting of drain-back connection tube and lead supply line.</p> | CON SX | 16 01 20 | | | | | | | | | | |

Solar panels - drain-back system



| | Article | Type | Order No. |
|---|---|---------|-----------|
| Solar panel storage tank extension kit 2 |  <p>Connection kit for the connection of additional warm-water storage tanks, consisting of drain-back connection tube and lead supply line.</p> | CON SXE | 16 01 21 |
| Circulation lance |  <p>For energetically-optimised incorporation of the tap-water circulation in the hot water connection of the warm-water storage tank.</p> | ZKL | 16 51 13 |
| Thermostatic mixer as scalding protector | <p>Thermal safety device for the warm-water pipe. Setting range 35-60°C.</p> | VTA32 | 15 60 15 |
| Screw connection kit 1" | <p>For connection of the scald protection VTA32.</p> | | 15 60 16 |
| Thermostatic regulator 230V | <p>With capillary tube temperature sensor, setting range 35-85°C.</p> | SCS-TR | 16 41 30 |
| 3-way switching valve 1" male |  <p>With motor drive 230V, switch-over time 6 sec.</p> | 3 W-UV | 15 60 34 |

Solar collector

Thermal solar collector for hot water production

- › Solar collectors can produce up to 70% of the energy needed for hot water production - a major cost saving
- › Horizontal solar collector for domestic hot water production
- › Vertical solar collector for domestic hot water production
- › High efficiency collectors transfer all the short-wave solar radiation into heat as a result of their highly selective coating
- › Easy to install on roof tiles
- › Can be used for drain-back and pressurised applications



| Accessory | | | | EKSV21P | EKSV26P | EKSH26P |
|-------------------------|--|--------------------|----------------------------------|--|--------------|--------------|
| Mounting | | | | Vertical | | Horizontal |
| Dimensions | Unit | HeightxWidthxDepth | mm | 2000x1006x85 | 2000x1300x85 | 1300x2000x85 |
| Weight | Unit | | kg | 33 | | 42 |
| Volume | | | l | 1.3 | 1.7 | 2.1 |
| Surface | Outer | | m ² | 2.01 | | 2.60 |
| | Aperture | | m ² | 1.800 | | 2.360 |
| | Absorber | | m ² | 1.79 | | 2.35 |
| Coating | | | | Micro-therm (absorption max. 96%, Emission ca. 5% +/-2%) | | |
| Absorber | | | | Harp-shaped copper pipe register with laser-welded highly selective coated aluminium plate | | |
| Glazing | | | | Single pane safety glass, transmission +/- 92% | | |
| Allowed roof angle | Min.~Max. | | ° | | 15~80 | |
| Operating pressure | Max. | | bar | | 6 | |
| Stand still temperature | Max. | | °C | | 192 | |
| Thermal performance | collector efficiency (η _{col}) | | % | | 61 | |
| | Zero loss collector efficiency η ₀ | | % | 0.781 | | 0.784 |
| | Heat loss coefficient a ₁ | | W/m ² .K | 4.240 | | 4.250 |
| | Temperature dependence of the heat loss coefficient a ₂ | | W/m ² .K ² | 0.006 | | 0.007 |
| | Thermal capacity | | kJ/K | 4.9 | | 6.5 |
| Auxiliary | Solpump | | W | | - | |
| | Annual auxiliary electricity consumption Q _{aux} | | kWh | | - | |
| | Solstandby | | W | | - | |


EKSRPS4A/EKSRDS2A

Pump station

- › Save energy and reduce CO₂ emissions with a solar system for domestic hot water production
- › Pump station connectable to drain-back solar system
- › Pump station and control provide the transfer of solar heat to the domestic hot water tank



| Accessory | | | | EKSRPS4 | EKSRDS2A | |
|-------------------------|---|--------------------|------|---|-------------|---|
| Mounting | | | | On side of tank | On wall | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 815x142x230 | 410x314x154 | |
| Weight | Unit | | kg | | 6 | |
| Operation range | Ambient temperature | Min.~Max. | °C | 5~40 | ~40 | |
| Operating pressure | Max. | | bar | - | 6 | |
| Stand still temperature | Max. | | °C | 85 | 120 | |
| Control | | | | Digital temperature difference controller with plain text display | | |
| Power consumption | | | | W | 2 | 5 |
| Sensor | Solar panel temperature sensor | | | Pt1000 | | |
| | Storage tank sensor | | | PTC | - | |
| | Return flow sensor | | | PTC | - | |
| | Feed temperature and flow sensor | | | Voltage signal (3.5V DC) | | |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 1~/50/230 | -/50/230 | |
| Power supply intake | | | | Indoor unit | | |
| Auxiliary | Solpump | | W | 33 | 23 | |
| | Annual auxiliary electricity consumption Q _{aux} | | kWh | 78 | 89 | |
| | Solstandby | | W | 2.00 | 5.00 | |

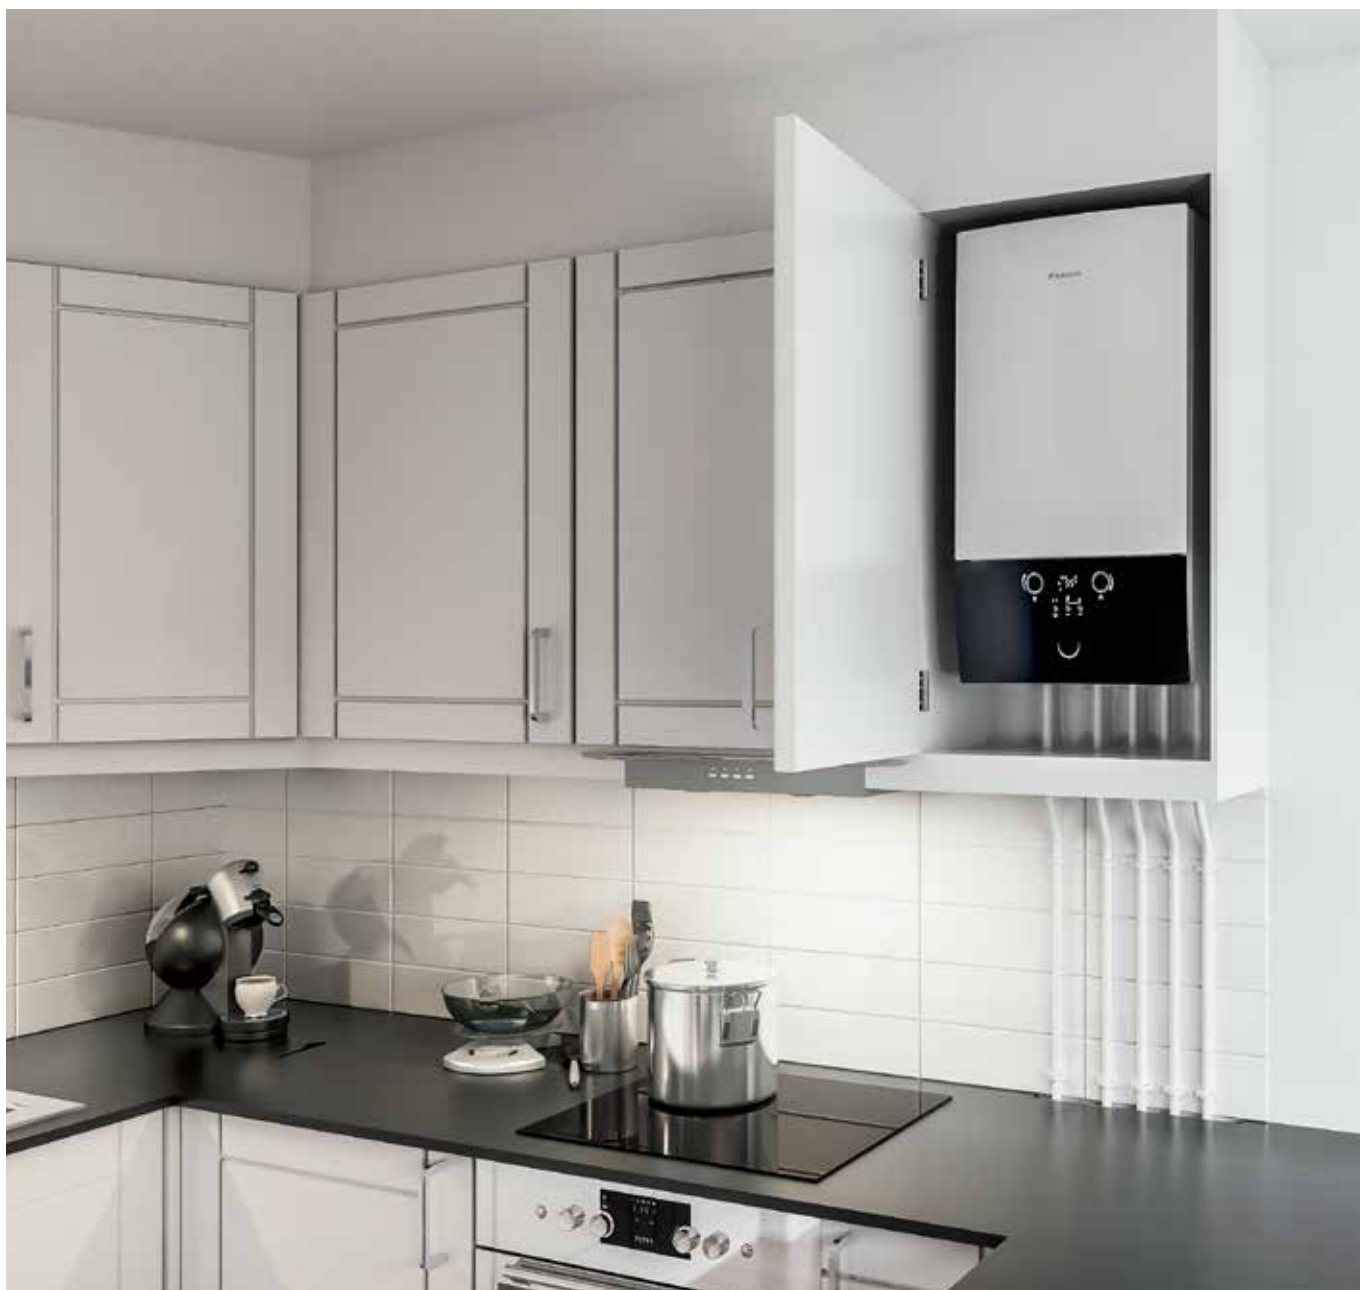


Trust Daikin

Daikin may not be a household name. After all, we don't make cars, TVs, fridges or washing machines. But we do make world-class heat pumps. In fact, more than 275,000 Daikin Altherma heat pumps have been fitted across Europe since its initial launch in 2006. Because we focus on doing only what we're best at: creating the most efficient heating, ventilation and air conditioning solutions, renowned for design excellence, quality and reliability. So you can depend on Daikin for the ultimate in comfort, leaving you free to focus on other essentials.

ERHQ-BV3, EBHQ-BBV3, EDHQ-BBV3 are not intended for use in Erp cold regions as defined in EN no 811-814/2013

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



ECPEN19-721A

07/19



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.